

PRICE LIST 2026

valid from 1st of April 2026



COMBI PACKAGES



Quick coupler + 2 Backhoe buckets + Ditch-cleaning bucket = Combi packages

OPTIONAL ADDITIONAL PRODUCTS



IMPRINT

HENLE Baumaschinentechnik GmbH

Ringstrasse 9 • 89192 Rammingen

DEUTSCHLAND

Phone: +49 (0) 73 45 - 96 77 0

info@henle-baumaschinentechnik.de

www.henle-baumaschinentechnik.de

Valid from 1st of April

Gross price list • State 04/2026

The illustrations are symbolic; the actual design and weight specifications may vary depending on size and equipment.

Additional attachments and sizes are available upon request, Subject to technical changes.

Our terms and conditions apply.

ALL PACKAGE PRICES ARE GROSS PRICES.

YOUR DEALER DISCOUNT WILL BE DEDUCTED WHEN THE ORDER IS RECEIVED.

ALL ATTACHMENTS ARE SUPPLIED WITH AN HT ADAPTER.

OPERATING WEIGHT 1 TO 2 T – CLASS 1

Quick coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package
 Mechanical QC01 M incl. load hook		screwed/without teeth Cutting width freely selectable		tilting with cylinder Cutting width freely selectable		3,479 €
Optional additional product						see below
Additional charge with hydraulic Quick coupler QC01 SHF (single-acting)						426 €
Additional charge with hydraulic Quick coupler QC01 HF (double-acting)						831 €
Additional charge with welded tooth system						84 €
Deduction without load hook						- 165 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package
 Mechanical QC01 M with BV100-178° (to 2t) incl. load hook		screwed/without teeth Cutting width freely selectable		rigid Cutting width freely selectable		5,124 €
Optional additional product						see below
Additional charge with hydraulic Quick coupler QC01 SHF (single-acting)						520 €
Additional charge with hydraulic Quick coupler QC01 HF (double-acting)						878 €
Additional charge with welded tooth system						84 €
Deduction without load hook						- 165 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package
 Mechanical QC01 M with PT4.5-180° (to 1.8t) PT030-180° (to 2t) incl. load hook		screwed/without teeth Cutting width freely selectable		rigid Cutting width freely selectable		5,256 € 7,610 €
Optional additional product						see below
Additional charge with hydraulic Quick coupler QC01 SHF PT4.5 (single-acting)						629 €
Additional charge with hydraulic Quick coupler QC01 HF PT4.5 (double-acting)						989 €
Additional charge with hydraulic Quick coupler QC01 SHF PT030 (single-acting)						350 €
Additional charge with hydraulic Quick coupler QC01 HF PT030 (double-acting)						709 €
Additional charge with welded tooth system						84 €
Deduction without load hook						- 165 €

OPTIONAL ADD-ON PRODUCTS AT A SPECIAL PRICE

Ripper tooth QC01 HT	Sorting bucket with skeleton bars K1 600mm QC01 HT	Excavator rake 1000mm QC01 HT	Tele bucket™ 150/600mm QC01 HT
659 €	834 €	985 €	650 €

OPERATING WEIGHT 2 TO 2.5 T – CLASS 2

Quick coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package
 Mechanical QC03M incl. load hook		screwed/without teeth Cutting width freely selectable		tilting with cylinder Cutting width freely selectable		4,256 €
Optional additional product						see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)						450 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)						946 €
Additional charge with welded tooth system						84 €
Deduction without load hook						- 187 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package
 Mechanical QC03M with BV100-178° (to 2.3t) incl. load hook		screwed/without teeth Cutting width freely selectable		rigid Cutting width freely selectable		5,664 €
Optional additional product						see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)						564 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)						964 €
Additional charge with welded tooth system						84 €
Deduction without load hook						- 187 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package
 Mechanical QC03M with PT030-180° (to 3t) incl. load hook		screwed/without teeth Cutting width freely selectable		rigid Cutting width freely selectable		8,153 €
Optional additional product						see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)						414 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)						809 €
Additional charge with welded tooth system						84 €
Deduction without load hook						- 187 €

OPTIONAL ADD-ON PRODUCTS AT A SPECIAL PRICE

Ripper tooth QC03HT	Sorting bucket with skeleton bars K2 800mm QC03HT	Excavator rake 1500mm QC03HT	Tele bucket™ 150/600mm QC03HT
859 €	1,219 €	1,398 €	690 €



OPERATING WEIGHT 2.5 TO 3.8 T – CLASS 2S

Quick coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC03M incl. load hook		screwed/without teeth Cutting width freely selectable		tilting with cylinder incl. rear cutting edge Cutting width freely selectable			5,073 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)							450 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)							946 €
Additional charge with welded tooth system							40 €
Deduction without load hook							- 187 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC03M with BV1115-178° (to 4.2t) incl. load hook		screwed/without teeth Cutting width freely selectable		rigid incl. rear cutting edge Cutting width freely selectable			7,537 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)							525 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)							873 €
Additional charge with welded tooth system							40 €
Deduction without load hook							- 187 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC03M with PT030-180° (to 3t) PT050-180° (to 5t) incl. load hook		screwed/without teeth Cutting width freely selectable		rigid incl. rear cutting edge Cutting width freely selectable		with PT030 with PT050	8,683 € 9,619 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)							475 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)							809 €
Additional charge with welded tooth system							40 €
Deduction without load hook							- 187 €

OPTIONAL ADD-ON PRODUCTS AT A SPECIAL PRICE

Ripper tooth QC03HT	Sorting bucket with skeleton bars K2 800mm QC03HT	Excavator rake 1500mm QC03HT	Tele bucket™ 150/600mm QC03HT
859 €	1,219 €	1,398 €	690 €

OPERATING WEIGHT 3.8 TO 5 T – CLASS 3

Quick coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC03M incl. load hook		screwed/without teeth Cutting width freely selectable		tilting with cylinder incl. rear cutting edge Cutting width freely selectable			5,582 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)							450 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)							946 €
Additional charge with welded tooth system							132 €
Deduction without load hook							- 187 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC03M with BV125-178° (to 6.2t) incl. load hook		screwed/without teeth Cutting width freely selectable		rigid incl. rear cutting edge Cutting width freely selectable			9,158 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)							559 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)							958 €
Additional charge with welded tooth system							132 €
Deduction without load hook							- 187 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC03M with PT050-180° (to 5t) incl. load hook		screwed/without teeth Cutting width freely selectable		rigid incl. rear cutting edge Cutting width freely selectable			10,091 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)							475 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)							809 €
Additional charge with welded tooth system							132 €
Deduction without load hook							- 187 €

OPTIONAL ADD-ON PRODUCTS AT A SPECIAL PRICE

Ripper tooth QC03HT	Sorting bucket with skeleton bars K3 800mm QC03HT	Excavator rake 2000mm QC03HT	Tele bucket™ 150/600mm QC03HT
859 €	1,441 €	1,545 €	690 €



OPERATING WEIGHT 5 TO 6.5 T – CLASS 3+

Quick coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC03M incl. load hook		screwed/without teeth Cutting width freely selectable		tilting with cylinder incl. rear cutting edge Cutting width freely selectable			5,783 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)							450 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)							946 €
Additional charge with welded tooth system							140 €
Deduction without load hook							- 187 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC03M with BV125-178° (to 6.2t) BV130-178° (to 6.5t) incl. load hook		screwed/without teeth Cutting width freely selectable		rigid incl. rear cutting edge Cutting width freely selectable		with BV125 with BV130	9,158 € 10,268 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)							559 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)							958 €
Additional charge with welded tooth system							140 €
Deduction without load hook							- 187 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC03M with PT070-180° (to 6.5t) incl. load hook		screwed/without teeth Cutting width freely selectable		rigid incl. rear cutting edge Cutting width freely selectable			12,054 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC03SHF (single-acting)							504 €
Additional charge with hydraulic Quick coupler QC03Hp (double-acting)							813 €
Additional charge with welded tooth system							140 €
Deduction without load hook							- 187 €

OPTIONAL ADD-ON PRODUCTS AT A SPECIAL PRICE

Ripper tooth QC03HT	Sorting bucket with skeleton bars K3S 800mm QC03HT	Excavator rake 2000mm QC03HT	Tele bucket™ 150/600mm QC03HT
859 €	1,731 €	1,545 €	690 €

OPERATING WEIGHT 6.5 TO 8.8 T – CLASS 4

Quick coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC08M incl. load hook		welded/without teeth Cutting width freely selectable		tilting with cylinder incl. rear cutting edge Cutting width freely selectable			10,122 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC08Hp (double-acting)							1,044 €
Deduction without load hook							- 262 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC08M with BV160-178° (to 10t) incl. load hook		welded/without teeth Cutting width freely selectable		rigid incl. rear cutting edge Cutting width freely selectable			14,352 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC08Hp (double-acting)							1,559 €
Deduction without load hook							- 262 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
 Mechanical QC08M with PT100-180° (to 10t) incl. load hook		welded/without teeth Cutting width freely selectable		rigid incl. rear cutting edge Cutting width freely selectable			16,155 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC08Hp (double-acting)							1,448 €
Deduction without load hook							- 262 €

OPTIONAL ADD-ON PRODUCTS AT A SPECIAL PRICE

Ripper tooth QC08HT	Sorting bucket with skeleton bars K4 1000mm QC08HT	Excavator rake 2500mm QC08HT	Stacking system QC08HT
1,598 €	2,534 €	2,259 €	2,807 €



OPERATING WEIGHT 8.8 TO 12 T – CLASS 4S

Quick coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
H Mechanical QC08M incl. load hook		welded/without teeth Cutting width freely selectable		tilting with cylinder incl. rear cutting edge Cutting width freely selectable			10,814 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC08Hp (double-acting)							1,044 €
Deduction without load hook							- 262 €

Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
HKS Mechanical QC08M with BV160-178° (to 10t) BV180-178° (to 11t) incl. load hook		welded/without teeth Cutting width freely selectable		rigid incl. rear cutting edge Cutting width freely selectable		with BV160 with BV180	15,032 € 15,343 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC08Hp (double-acting)							1,559 €
Deduction without load hook							- 262 €


Tilt coupler	+	2 Backhoe bucket	+	Ditch-cleaning bucket	=	Combi package	
POWERLIFT Mechanical QC08M with PT100-180° (to 10t) incl. load hook		welded/without teeth Cutting width freely selectable		rigid incl. rear cutting edge Cutting width freely selectable			16,841 €
Optional additional product							see below
Additional charge with hydraulic Quick coupler QC08Hp (double-acting)							1,448 €
Deduction without load hook							- 262 €

OPTIONAL ADD-ON PRODUCTS AT A SPECIAL PRICE

Ripper tooth QC08HT	Sorting bucket with skeleton bars K4S 1000mm QC08HT	Excavator rake 2500mm QC08HT	Stacking system QC08HT
1,857 €	3,085 €	2,259 €	2,807 €

CONTENTS


1	PRODUCTS ON REQUEST
2	OPERATING WEIGHT 0.5 TO 1 T
4	OPERATING WEIGHT 1 TO 2 T
14	OPERATING WEIGHT 2 TO 2.5 T
26	OPERATING WEIGHT 2.5 TO 3.8 T
40	OPERATING WEIGHT 3.8 TO 5 T
54	OPERATING WEIGHT 5 TO 6.5 T
68	OPERATING WEIGHT 6.5 TO 8.8 T
82	OPERATING WEIGHT 8.8 TO 12 T
96	OPERATING WEIGHT 12 TO 16 T
114	OPERATING WEIGHT 16 TO 21 T
132	OPERATING WEIGHT 21 TO 26 T
148	OPERATING WEIGHT 26 TO 30 T
164	OPERATING WEIGHT 30 TO 36 T
180	OPERATING WEIGHT 36 TO 45 T
192	ADDITIONAL CHARGES
194	ADAPTER AND PLATES
200	TRANSFORMATIONS
202	AGB

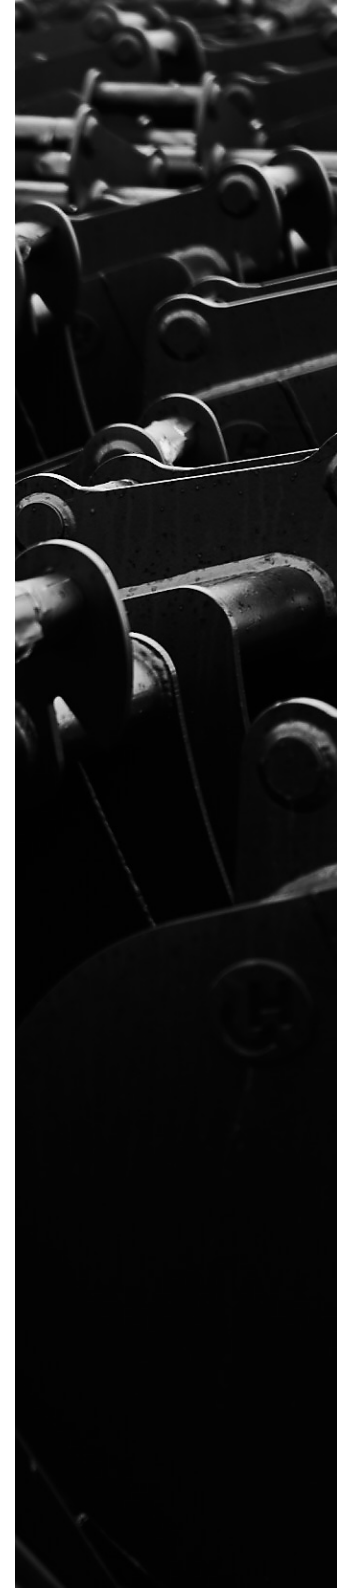



PRODUCTS ON REQUEST


TECHNICAL DETAILS AND PRICES FOR THE FOLLOWING PRODUCTS
ARE AVAILABLE UPON REQUEST.



**QUICK COUPLER
VERACHTERT**



**BACKHOE BUCKET WITH
SPECIAL EQUIPMENT**
TO 80 T OPERATING WEIGHT

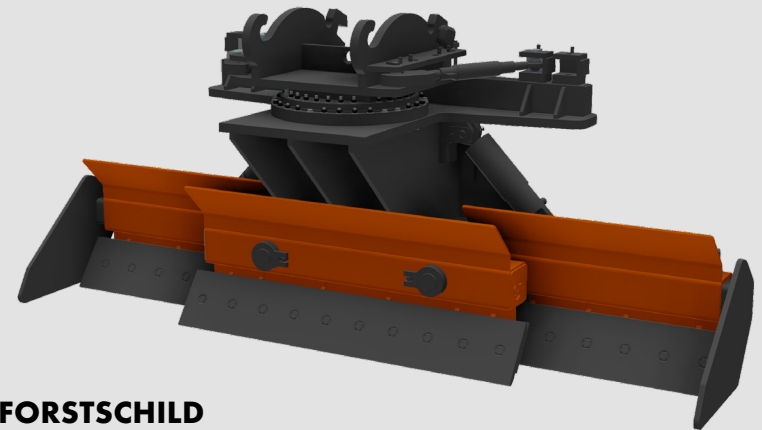

FORSTCHILD

OPERATING WEIGHT 0.5 TO 1 T



BACKHOE BUCKET CLASS 0

OPERATING WEIGHT 0.5 TO 1 T

Bottom and side parts 5mm, side sickles HB400 5mm, cutting edge HB400 110x12mm, screwed tooth system, suitable QC01HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
250	0.016	26	3	478 €
300	0.020	28	3	487 €
400	0.029	32	3	504 €
500	0.038	37	4	531 €

Durch die längeren teeth kann es zu Kollisionen with dem Löffelstiel kommen.



BACKHOE BUCKET CLASS 0

OPERATING WEIGHT 0.5 TO 1 T

Bottom and side parts 5mm, side sickles HB400 5mm, cutting edge HB400 110x12mm, without teeth (with drill holes), suitable QC01HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
250	0.016	23	462 €
300	0.020	24	472 €
400	0.029	28	489 €
500	0.038	32	510 €

OPERATING WEIGHT 0.5 TO 1 T

DITCH-CLEANING BUCKET RIGID CLASS 0

OPERATING WEIGHT 0.5 TO 1 T

Bottom and side parts 4mm, side sickles HB400 5mm, cutting edge HB400 110x12mm, stiffening sickle, suitable QC01HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
750	0.034	35	586 €
800	0.036	36	598 €
850	0.038	38	616 €
1000	0.046	42	669 €

DITCH-CLEANING BUCKET CLASS 0 WITH CYLINDER

OPERATING WEIGHT 0.5 TO 1 T

Bottom and side parts 4mm, side sickles HB400 5mm, cutting edge HB400 110x12mm, stiffening sickle, without tubing, 1 cylinder 2x45°, suitable QC01HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
750	0.034	55	1,464 €
800	0.036	57	1,471 €
850	0.038	58	1,479 €
1000	0.046	63	1,501 €

OPERATING WEIGHT 1 TO 2 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 0.5 TO 2 T

Compatible with system Lehnhoff, hydraulic Quick coupler with single- or double-acting cylinder and drop protection

Type	Version	Cylinder [hydr.]	Weight [kg]	Price
QC01 M	mechanical	-	21	698 €
QC01 SHF	hydraulic	single-acting	22	1,142 €
QC01 HF	hydraulic	double-acting	23	1,564 €
Installation kit QC01 SHF, single-acting (12V or 24V)				468 €
Installation kit QC01 HF, double-acting (12V or 24V)				802 €
Additional charge with welded load hook 1 t				165 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 0.5 TO 2 T

Quick coupler QuickChange with hydraulic tilt motor from HKS, incl. hose holder*,

**incl. load safety valve, tilt range 178°

Type	Operating weight [t]	Version	Cylinder [hydr.]	Weight [kg]	Price
QC01 M-BV100**	1.6 to 2	mechanical	-	50	3,639 €
QC01 SHF-BV100**	1.6 to 2	hydraulic	single-acting	51	4,167 €
QC01 HF-BV100**	1.6 to 2	hydraulic	double-acting	52	4,532 €
Installation kit QC01 SHF, single-acting (12V or 24V)					468 €
Installation kit QC01 HF, double-acting (12V or 24V)					802 €
Additional charge with welded load hook 1 t					165 €

*for hydraulic Quick couplern

OPERATING WEIGHT 1 TO 2 T


TILT COUPLER – QUICKCHANGE/ POWERTILT

OPERATING WEIGHT 0.5 TO 2 T

Quick coupler QuickChange with hydraulic tilt motor from PowerTilt, incl. hose holder, tilt range 180°


*incl. load safety valve

**incl. manifold and oil connection for hydr. Quick coupler



Type	Operating weight [t]	Version	Cylinder [hydr.]	Weight [kg]	Price
QC01 M-PT4.5*	0 to 1.8	mechanical	-	45	3,637 €
QC01 SHF-PT4.5*	0 to 1.8	hydraulic	single-acting	48	4,286 €
QC01 HF-PT4.5*	0 to 1.8	hydraulic	double-acting	50	4,657 €
QC01 M-PT030**	1.8 to 2	mechanical	-	52	6,089 €
QC01 SHF-PT030**	1.8 to 2	hydraulic	single-acting	53	6,449 €
QC01 HF-PT030**	1.8 to 2	hydraulic	double-acting	55	6,821 €
Installation kit QC01 SHF, single-acting (12V or 24V)					468 €
Installation kit QC01 HF, double-acting (12V or 24V)					802 €
Additional charge with welded load hook 1 t					165 €

OPERATING WEIGHT 1 TO 2 T




COMBI ADAPTER

Type	Weight [kg]	Price
QC01/QC03	25	745 €



WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC01	9	135 €
QC01HT	9	135 €
QC01HT with base plate (300x225x15mm)	16	215 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 1 TO 5 T

Type	Weight [kg]	Price
OQ40	15	260 €
OQ40-5	15	271 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC01	15	426 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC01	23	682 €

OPERATING WEIGHT 1 TO 2 T

BACKHOE BUCKET CLASS 1

OPERATING WEIGHT 1 TO 2 T

Bottom and side parts 5mm, side sickles HB400 6mm,
cutting edge HB400 150x16mm, welded or
screwed tooth system, suitable QC01HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
220	0.018	29	2	480 €	454 €
250	0.022	31	3	504 €	468 €
300	0.027	34	3	515 €	479 €
400	0.039	39	3	535 €	497 €
500	0.051	45	4	574 €	525 €
600	0.063	50	4	595 €	543 €

Additional charge with welded front-insert blade 150x16mm per meter,
without replacement teeth

187 €

Additional charge as clay bucket or with cutting edge moved forward 70mm

+15 %

Additional charge with adapter QC03HT

37 €

BACKHOE BUCKET CLASS 1

OPERATING WEIGHT 1 TO 2 T

Bottom and side parts 5mm, side sickles HB400 6mm,
cutting edge HB400 150x16mm, without teeth (with drill holes),
suitable QC01HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
220	0.018	26	444 €
250	0.022	28	453 €
300	0.027	30	463 €
400	0.039	34	482 €
500	0.051	39	504 €
600	0.063	44	523 €

Additional charge as clay bucket or with cutting edge moved forward 70mm

+15 %

Additional charge with adapter QC03HT

37 €

OPERATING WEIGHT 1 TO 2 T



HD-BACKHOE BUCKET CLASS 1

OPERATING WEIGHT 1 TO 2 T

Bottom and side parts HB450 5mm, side sickles HB450 6mm, side parts put on bottom, cutting edge HB500 150x16mm, welded tooth system, suitable QC01HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
220	0.018	29	2	538 €
250	0.022	31	3	572 €
300	0.027	34	3	606 €
400	0.039	39	3	646 €
500	0.051	45	4	677 €
600	0.063	50	4	711 €
Additional charge with welded front-insert blade 150x16mm per meter, without replacement teeth				187 €
Additional charge with cutting edge moved forward 70mm				+15 %
Additional charge with adapter QC03HT				37 €



HD-BACKHOE BUCKET CLASS 1

OPERATING WEIGHT 1 TO 2 T

Bottom and side parts HB450 5mm, side sickles HB450 6mm, side parts put on bottom, cutting edge HB500 150x16mm, without teeth, suitable QC01HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
220	0.018	26	507 €
250	0.022	28	526 €
300	0.027	30	560 €
400	0.039	34	600 €
500	0.051	39	615 €
600	0.063	44	650 €
Additional charge with cutting edge moved forward 70mm			+15 %
Additional charge with adapter QC03HT			37 €

Depending on the Quick coupler adapter, the digging depth may be limited with small cutting widths.

OPERATING WEIGHT 1 TO 2 T

DITCH-CLEANING BUCKET RIGID CLASS 1

OPERATING WEIGHT 1 TO 2 T

Bottom and side parts 4mm, side sickles HB400 6mm, cutting edge HB400 110x12mm, stiffening sickle, suitable QC01HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
800	0.061	48	584 €
850	0.065	50	616 €
1000	0.077	56	660 €
1200	0.093	64	686 €
Additional charge with screw-on reversible blade 150x16mm per meter			310 €
Additional charge with rear cutting edge 110x12mm per meter			153 €
Additional charge with adapter QC03HT			37 €

DITCH-CLEANING BUCKET CLASS 1 WITH CYLINDER

OPERATING WEIGHT 1 TO 2 T

Bottom and side parts 4mm, side sickles HB400 6mm, cutting edge HB400 110x12mm, stiffening sickle, 1 cylinder 2x45°, suitable QC01HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
850	0.065	86	1,718 €
1000	0.077	93	1,744 €
1200	0.093	101	1,775 €
Additional charge with screw-on reversible blade 150x16mm per meter			310 €
Additional charge with rear cutting edge 110x12mm per meter			153 €
Additional charge with adapter QC03HT			37 €

Cutting width below 850mm not possible,

OPERATING WEIGHT 1 TO 2 T



DEMOLITION AND SORTING BUCKET CLASS 1 WITH SKELETON BARS

OPERATING WEIGHT 1 TO 2 T

Skeleton bars 12mm, bar distance 40mm, side parts 5mm,
side sickles HB400 6mm, cutting edge HB500 150x16mm,
welded or screwed tooth system, suitable QC01HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
500	0.051	51	4	842 €	802 €
600	0.063	57	4	913 €	869 €
700	0.074	63	5	981 €	936 €
800	0.086	70	5	1,048 €	1,002 €
Additional charge with adapter QC03HT				37 €	

The bar distance may vary on the outer bars, depending on the cutting edge.



DEMOLITION AND SORTING BUCKET CLASS 1 WITH SKELETON BARS

OPERATING WEIGHT 1 TO 2 T

Skeleton bars 12mm, bar distance 40mm, side parts 5mm,
side sickles HB400 6mm, cutting edge HB500 150x16mm,
without teeth, suitable QC01HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
500	0.051	45	781 €
600	0.063	51	849 €
700	0.074	56	910 €
800	0.086	63	977 €
Additional charge with adapter QC03HT			37 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 1 TO 2 T

TILTROTATOR BUCKET CLASS 1/2

OPERATING WEIGHT 1 TO 2.5 T

Bottom HB450 5mm, side parts 4mm, side cutting edges HB450
8mm, cutting edge HB500 110x12mm, suitable QC01HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.054	40	769 €
900	0.090	58	933 €
Additional charge with adapter QC03HT			37 €

LEVELING BEAM

OPERATING WEIGHT 1 TO 2.5 T

Wear plates made of highly wear-resistant HB450,
cutting edge from HB500, with screwed adapter, suitable QC01HT



Width [mm]	Height [mm]	Weight [kg]	Price
1250	160	240	2,552 €
Additional charge with adapter QC03HT			37 €
Additional charge with roller			1,700 €

TELE BUCKET™

OPERATING WEIGHT 1 TO 2 T

Bottom and side parts 8mm, cutting edge HB500 150x16mm,
suitable QC01HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
150	600	35	682 €



OPERATING WEIGHT 1 TO 2 T



SPADE BUCKET

OPERATING WEIGHT 1 TO 2 T

Bottom and side parts 8mm, cutting edge HB500 150x16mm, suitable double adapter QC01/QC01HT

Cutting edge [mm]	Length [mm]	Weight [kg]	Price
320	900	55	739 €
Additional charge with replaceable blade			87 €



ROOT CUTTER

OPERATING WEIGHT 1 TO 2 T

Cutting edge HB450 12mm, suitable QC01HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
115	215	21	656 €



RIPPER TOOTH

OPERATING WEIGHT 1 TO 2 T

HB450 leg with changeable tooth tips, ripper tooth J200, suitable QC01HT

Height [mm]	Leg [mm]	Weight [kg]	Price
444	35	40	687 €
Special tooth for clearing work			106 €

OPERATING WEIGHT 1 TO 2 T

GRAB RAKE

OPERATING WEIGHT 1 TO 2 T

HB450 legs with changeable ripper tooth, leg thickness 25mm, ripper tooth J200, suitable QC01HT

Legs	Width [mm]	Weight [kg]	Price
3	500	45	864 €
4	600	55	1,047 €



EXCAVATOR RAKE

OPERATING WEIGHT 1 TO 2 T


HB450 legs, leg thickness 6mm, leg spacing 40mm, suitable QC01HT

Width [mm]	Legs	Weight [kg]	Price
1000	23	47	1,026 €



MOUNTING PLATE

Type	Price with drilling pattern
QC01	502 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 2 t

Type	Weight [kg]	Price
QC01	19	617 €



OPERATING WEIGHT 2 TO 2.5 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 2 TO 6.5 T

Compatible with system Lehnhoff, hydraulic Quick coupler with single- or double-acting cylinder and drop protection

Type	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M	mechanical	-	30	1,145 €
QC03SHF	hydraulic	single-acting	32	1,613 €
QC03Hp	hydraulic	double-acting	33	2,130 €
Installation kit QC03SHF, single-acting (12V or 24V)				468 €
Installation kit QC03Hp, double-acting (12V or 24V)				802 €
Additional charge with welded load hook 3 t				187 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 2 TO 2.3 T

Quick coupler QuickChange with hydraulic tilt motor from HKS incl. load safety valve, incl. hose holder*, tilt range 178°

Type	Operating weight [t]	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M-BV100	2 to 2.3	mechanical	-	50	3,756 €
QC03SHF-BV100	2 to 2.3	hydraulic	single-acting	51	4,329 €
QC03Hp-BV100	2 to 2.3	hydraulic	double-acting	52	4,735 €
Installation kit QC03SHF, single-acting (12V or 24V)					468 €
Installation kit QC03Hp, double-acting (12V or 24V)					802 €
Additional charge with welded load hook 3 t					187 €


* for hydraulic Quick couplers

OPERATING WEIGHT 2 TO 2.5 T

TILT COUPLER – QUICKCHANGE/ POWERTILT


OPERATING WEIGHT 2 TO 3 T

Quick coupler QuickChange with hydraulic tilt motor from PowerTilt incl. manifold and oil connection for hydraulic Quick coupler, tilt range 180°



Type	Operating weight [t]	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M-PT030	2 to 3	mechanical	-	61	6,193 €
QC03SHF-PT030	2 to 3	hydraulic	single-acting	63	6,620 €
QC03Hp-PT030	2 to 3	hydraulic	double-acting	65	7,027 €
Installation kit QC03SHF, single-acting (12V or 24V)					468 €
Installation kit QC03Hp, double-acting (12V or 24V)					802 €
Additional charge with welded load hook 3 t					187 €

OPERATING WEIGHT 2 TO 2.5 T




COMBI ADAPTER

Type	Weight [kg]	Price
QC01/QC03	25	745 €



WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC03	15	172 €
QC03HT	17	172 €
QC03HT with base plate (420x250x15mm)	26	246 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 1 TO 5 T

Type	Weight [kg]	Price
OQ40	15	260 €
OQ40-5	15	271 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC03	23	502 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC03	32	834 €

OPERATING WEIGHT 2 TO 2.5 T

BACKHOE BUCKET CLASS 2

OPERATING WEIGHT 2 TO 2.5 T

Bottom and side parts 6mm, side sickles HB400 6mm,
cutting edge HB400 150x16mm, welded or
screwed tooth system, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
250	0.028	44	3	587 €	547 €
300	0.036	47	3	600 €	560 €
400	0.051	54	3	623 €	581 €
500	0.067	62	4	666 €	624 €
600	0.083	68	4	708 €	661 €
800	0.115	83	5	802 €	734 €

Additional charge with welded front-insert blade 150x16mm per meter,
without replacement teeth

187 €

Additional charge as clay bucket or with cutting edge moved forward 70mm

+15 %

Wir empfehlen ein welded tooth system,

BACKHOE BUCKET CLASS 2

OPERATING WEIGHT 2 TO 2.5 T

Bottom and side parts 6mm, side sickles HB400 6mm,
cutting edge HB400 150x16mm, without teeth (with drill holes),
suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
250	0.028	40	532 €
300	0.036	43	544 €
400	0.051	50	566 €
500	0.067	56	604 €
600	0.083	63	641 €
800	0.115	76	708 €

Additional charge as clay bucket or with cutting edge moved forward 70mm

+15 %

OPERATING WEIGHT 2 TO 2.5 T



HD-BACKHOE BUCKET CLASS 2

OPERATING WEIGHT 2 TO 2.5 T

Bottom and side parts HB450 6mm, side sickles HB450 6mm, side parts put on bottom, cutting edge HB500 150x16mm, welded tooth system, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
300	0.036	47	3	702 €
400	0.051	54	3	769 €
500	0.067	62	4	790 €
600	0.083	68	4	829 €
800	0.115	83	5	935 €
Additional charge with welded front-insert blade 150x16mm per meter, without replacement teeth				187 €
Additional charge with cutting edge moved forward 70mm				+15 %



HD-BACKHOE BUCKET CLASS 2

OPERATING WEIGHT 2 TO 2.5 T

Bottom and side parts HB450 6mm, side sickles HB450 6mm, side parts put on bottom, cutting edge HB500 150x16mm, without teeth, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
300	0.036	43	656 €
400	0.051	50	723 €
500	0.067	56	729 €
600	0.083	63	768 €
800	0.115	76	858 €
Additional charge with cutting edge moved forward 70mm			+15 %

OPERATING WEIGHT 2 TO 2.5 T

DITCH-CLEANING BUCKET RIGID CLASS 1S

OPERATING WEIGHT 2 TO 2.5 T

Bottom and side parts 5mm, side sickles HB400 6mm, cutting edge HB400 150x16mm, stiffening sickle, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1000	0.097	77	885 €
1200	0.118	88	907 €
1300	0.129	94	918 €
Additional charge with screw-on reversible blade 150x16mm per meter			310 €
Additional charge with rear cutting edge 110x12mm per meter			153 €

DITCH-CLEANING BUCKET CLASS 1S WITH CYLINDER

OPERATING WEIGHT 2 TO 2.5 T

Bottom and side parts 5mm, side sickles HB400 6mm, cutting edge HB400 150x16mm, stiffening sickle, 1 cylinder 2x45°, suitable QC03HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1000	0.097	113	1,876 €
1200	0.118	124	1,895 €
1300	0.129	130	1,905 €
Additional charge with screw-on reversible blade 150x16mm per meter			310 €
Additional charge with rear cutting edge 110x12mm per meter			153 €

OPERATING WEIGHT 2 TO 2.5 T



DEMOLITION AND SORTING BUCKET CLASS 2 WITH SKELETON BARS

OPERATING WEIGHT 2 TO 2.5 T

Skeleton bars 15mm, bar distance 40mm, side parts 6mm, side sickles HB400 6mm, cutting edge HB500 150x16mm, welded or screwed tooth system, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
500	0.067	78	4	897 €	882 €
600	0.083	86	4	1,125 €	1,069 €
700	0.099	95	5	1,225 €	1,158 €
800	0.115	106	5	1,337 €	1,270 €

The bar distance may vary on the outer bars, depending on the cutting edge.



DEMOLITION AND SORTING BUCKET CLASS 2 WITH SKELETON BARS

OPERATING WEIGHT 2 TO 2.5 T

Skeleton bars 15mm, bar distance 40mm, side parts 6mm, side sickles HB400 6mm, cutting edge HB500 150x16mm, without teeth, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
500	0.067	72	861 €
600	0.083	80	1,049 €
700	0.099	87	1,133 €
800	0.115	98	1,244 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 2 TO 2.5 T

TILTROTATOR BUCKET CLASS 1/2

OPERATING WEIGHT 1 TO 2.5 T

Bottom HB450 5mm, side parts 4mm, side cutting edges HB450 8mm, cutting edge HB500 110x12mm, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.054	40	769 €
900	0.090	58	933 €

LEVELING BEAM

OPERATING WEIGHT 1 TO 2.5 T

Wear plates made of highly wear-resistant HB450, cutting edge from HB500, with screwed adapter, suitable QC03HT



Width [mm]	Height [mm]	Weight [kg]	Price
1250	160	240	2,589 €
Additional charge with roller			1,700 €

TELE BUCKET™

OPERATING WEIGHT 2 TO 6.5 T

Bottom and side parts 8mm, cutting edge HB500 150x16mm, suitable QC03HT



Cutting edge [mm]	Height [mm]	Weight [kg]	Price
150	600	42	729 €
150	800	46	832 €

OPERATING WEIGHT 2 TO 2.5 T



SPADE BUCKET

OPERATING WEIGHT 2 TO 6.5 T

Bottom and side parts 10mm, cutting edge HB500 200x20mm, suitable double adapter QC03/QC03HT

Cutting edge [mm]	Length [mm]	Weight [kg]	Price
320	1000	95	994 €
Additional charge with replaceable blade			110 €



ROOT CUTTER

OPERATING WEIGHT 2 TO 6.5 T

Cutting edge HB450 15mm, suitable QC03HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
125	290	38	874 €



RIPPER TOOTH

OPERATING WEIGHT 2 TO 6.5 T

HB450 leg with changeable tooth tips, ripper tooth J250, suitable QC03HT

Height [mm]	Leg [mm]	Weight [kg]	Price
479	50	68	895 €
Special tooth for clearing work			147 €

OPERATING WEIGHT 2 TO 2.5 T

GRAB RAKE

OPERATING WEIGHT 2 TO 3.8 T

HB450 legs with changeable ripper tooth, leg thickness 30mm, ripper tooth J200, suitable QC03HT

Legs	Width [mm]	Weight [kg]	Price
3	600	84	1,270 €
4	800	107	1,535 €



EXCAVATOR RAKE

OPERATING WEIGHT 2 TO 6.5 T

HB450 legs, leg thickness 12mm, leg spacing 80mm, suitable QC03HT


Width [mm]	Legs	Weight [kg]	Price
1500	17	95	1,457 €
2000	23	125	1,609 €




STACKING SYSTEM

FEMII, max. load capacity to 2.5 t, with stand, suitable QC03HT

Fork carrier width [mm]	Fork prongs length [mm]	Weight [kg]	Price
1200	1200	115	2,639 €



When ordering, please specify if you are using the stacking system with a tilt rotator and the type of the tiltrotator.



MOUNTING PLATE

Type	Price with drilling pattern
QC03	583 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 3.15 t

Type	Weight [kg]	Price
QC03	30	678 €

OPERATING WEIGHT 2.5 TO 3.8 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 2 TO 6.5 T

Compatible with system Lehnhoff, hydraulic Quick coupler with single- or double-acting cylinder and drop protection

Type	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M	mechanical	-	30	1,145 €
QC03SHF	hydraulic	single-acting	32	1,613 €
QC03Hp	hydraulic	double-acting	33	2,130 €
Installation kit QC03SHF, single-acting (12V or 24V)				468 €
Installation kit QC03Hp, double-acting (12V or 24V)				802 €
Additional charge with welded load hook 3 t				187 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 2.3 TO 4.2 T

Quick coupler QuickChange with hydraulic tilt motor from HKS incl. load safety valve, incl. hose holder*, tilt range 178°

Type	Operating weight [t]	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M-BV115	2.3 to 4.2	mechanical	-	87	5,111 €
QC03SHF-BV115	2.3 to 4.2	hydraulic	single-acting	89	5,644 €
QC03Hp-BV115	2.3 to 4.2	hydraulic	double-acting	91	5,999 €
Installation kit QC03SHF, single-acting (12V or 24V)					468 €
Installation kit QC03Hp, double-acting (12V or 24V)					802 €
Additional charge with welded load hook 3 t					187 €


*for hydraulic Quick couplern

OPERATING WEIGHT 2.5 TO 3.8 T

TILT COUPLER – QUICKCHANGE/ POWERTILT


OPERATING WEIGHT 2 TO 5 T

Quick coupler QuickChange with hydraulic tilt motor from PowerTilt incl. manifold and oil connection for hydraulic Quick coupler, tilt range 180°



Type	Operating weight [t]	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M-PT030	2 to 3	mechanical	-	61	6,193 €
QC03SHF-PT030	2 to 3	hydraulic	single-acting	63	6,620 €
QC03Hp-PT030	2 to 3	hydraulic	double-acting	65	7,027 €
QC03M-PT050	3 to 5	mechanical	-	79	7,166 €
QC03SHF-PT050	3 to 5	hydraulic	single-acting	80	7,655 €
QC03Hp-PT050	3 to 5	hydraulic	double-acting	82	8,000 €
Installation kit QC03SHF, single-acting (12V or 24V)					468 €
Installation kit QC03Hp, double-acting (12V or 24V)					802 €
Additional charge with welded load hook 3 t					187 €

OPERATING WEIGHT 2.5 TO 3.8 T




COMBI ADAPTER

Type	Weight [kg]	Price
QC01/QC03	25	745 €
QC03/QC08	42	830 €



WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC03	15	172 €
QC03HT	17	172 €
QC03HT with base plate (420x250x15mm)	26	246 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 1 TO 5 T

Type	Weight [kg]	Price
OQ40	15	260 €
OQ40-5	15	271 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC03	23	502 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC03	32	834 €

OPERATING WEIGHT 2.5 TO 3.8 T

BACKHOE BUCKET CLASS 2S

OPERATING WEIGHT 2.5 TO 3.8 T

Bottom and side parts 8mm, side sickles HB400 6mm,
cutting edge HB400 150x20mm, welded or
screwed tooth system, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
250	0.038	62	2	652 €	652 €
300	0.048	69	3	684 €	683 €
400	0.070	79	3	726 €	715 €
500	0.093	91	4	793 €	762 €
600	0.116	101	4	835 €	794 €
800	0.164	123	5	961 €	919 €

Additional charge with welded front-insert blade 150x16mm per meter,
without replacement teeth

187 €

Additional charge as clay bucket or with cutting edge moved forward 100mm

+15 %

We recommend a welded tooth system,

BACKHOE BUCKET CLASS 2S

OPERATING WEIGHT 2.5 TO 3.8 T

Bottom and side parts 8mm, side sickles HB400 6mm,
cutting edge HB400 150x20mm, without teeth (with drill holes),
suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
250	0.038	58	633 €
300	0.048	63	655 €
400	0.070	73	688 €
500	0.093	83	725 €
600	0.116	93	757 €
800	0.164	113	873 €

Additional charge as clay bucket or with cutting edge moved forward 100mm

+15 %

OPERATING WEIGHT 2.5 TO 3.8 T



HD-BACKHOE BUCKET CLASS 2S

OPERATING WEIGHT 2.5 TO 3.8 T

Bottom and side parts HB450 8mm, side sickles HB450 6mm, side parts put on bottom, cutting edge HB500 150x20mm, welded tooth system, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
300	0.048	69	3	838 €
400	0.070	79	3	885 €
500	0.093	91	4	957 €
600	0.116	101	4	1,005 €
800	0.164	123	5	1,124 €
Additional charge with welded front-insert blade 150x16mm per meter, without replacement teeth				187 €
Additional charge with cutting edge moved forward 100mm				+15 %



HD-BACKHOE BUCKET CLASS 2S

OPERATING WEIGHT 2.5 TO 3.8 T

Bottom and side parts HB450 8mm, side sickles HB450 6mm, side parts put on bottom, cutting edge HB500 150x20mm, without teeth, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
300	0.048	63	792 €
400	0.070	73	838 €
500	0.093	83	896 €
600	0.116	93	943 €
800	0.164	113	1,048 €
Additional charge with cutting edge moved forward 100mm			+15 %

OPERATING WEIGHT 2.5 TO 3.8 T

DITCH-CLEANING BUCKET RIGID CLASS 2

OPERATING WEIGHT 2.5 TO 3.8 T

Bottom 6mm, side parts HB400 8mm, cutting edge HB400 150x20mm, stiffening sickle, rear cutting edge HB400, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1000	0.133	129	1,154 €
1200	0.162	149	1,187 €
1300	0.176	159	1,204 €
1400	0.191	169	1,221 €
Additional charge with screw-on reversible blade 150x16 mm per meter			310 €

DITCH-CLEANING BUCKET CLASS 2 WITH CYLINDER


OPERATING WEIGHT 2.5 TO 3.8 T

Bottom 6mm, side parts HB400 8mm, cutting edge HB400 150x20mm, stiffening sickle, rear cutting edge HB400, 1 cylinder 2x45°, suitable QC03HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1000	0.133	180	2,443 €
1200	0.162	200	2,474 €
1300	0.176	210	2,492 €
1400	0.191	220	2,507 €
Additional charge with 2. cylinder			677 €
Additional charge with screw-on reversible blade 150x16 mm per meter			310 €
Additional charge with adapter OQ40-5 hydraulic			1,384 €

OPERATING WEIGHT 2.5 TO 3.8 T



DITCH-CLEANING BUCKET CLASS 2 WITH TILT MOTOR

OPERATING WEIGHT 2.5 TO 3.8 T

Bottom 6mm, side parts HB400 8mm, cutting edge HB400 150x20mm, stiffening sickle, rear cutting edge HB400, tilt range 2x50°, suitable QC03HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV115
1000	0.128	232	4,959 €
1200	0.156	256	5,015 €
1300	0.171	270	5,035 €
1400	0.184	280	5,060 €
Additional charge with adapter OQ40-5 hydraulic			1,384 €



TILT BACKHOE BUCKET CLASS 2S WITH CYLINDER

OPERATING WEIGHT 2.5 TO 3.8 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 150x20mm, center pin 40mm, steel bushings inside swivel head, 2 cylinder 2x45°, suitable QC03HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1000	0.151	194	3,037 €
1200	0.185	214	3,118 €
1400	0.219	235	3,198 €
Additional charge with adapter OQ40-5 hydraulic			1,384 €

OPERATING WEIGHT 2.5 TO 3.8 T

TILT BACKHOE BUCKET CLASS 2S WITH TILT MOTOR

OPERATING WEIGHT 2.5 TO 3.8 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 150x20mm, tilt range 2x50°, suitable QC03HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV115
1000	0.140	205	4,921 €
1200	0.170	230	5,000 €
1400	0.200	255	5,061 €
Additional charge with adapter OQ40-5 hydraulic			1,384 €

OPERATING WEIGHT 2.5 TO 3.8 T



LOADING BUCKET CLASS 2S

OPERATING WEIGHT 2.5 TO 3.8 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 150x20mm, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1000	0.151	124	1,197 €
1200	0.185	144	1,248 €
1400	0.219	165	1,301 €



TILTROTATOR BUCKET CLASS 2S

OPERATING WEIGHT 2.2 TO 3.8 T

Bottom HB450 5mm, side parts 5mm, side cutting edges HB450 10mm, cutting edge HB500 150x16mm, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
900	0.130	81	1,247 €
1100	0.165	95	1,340 €
1200	0.185	102	1,391 €

OPERATING WEIGHT 2.5 TO 3.8 T

DEMOLITION AND SORTING BUCKET CLASS 2S WITH SKELETON BARS

OPERATING WEIGHT 2.5 TO 3.8 T

Skeleton bars 15mm, bar distance 40mm, side parts 8mm, side sickles HB400 6mm, cutting edge HB500 150x20mm, welded or screwed tooth system, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
600	0.116	120	4	1,259 €	1,194 €
700	0.140	136	5	1,358 €	1,302 €
800	0.164	148	5	1,452 €	1,381 €
900	0.187	160	5	1,538 €	1,462 €
1000	0.211	172	5	1,615 €	1,570 €

The bar distance may vary on the outer bars, depending on the cutting edge.

DEMOLITION AND SORTING BUCKET CLASS 2S WITH SKELETON BARS

OPERATING WEIGHT 2.5 TO 3.8 T

Skeleton bars 15mm, bar distance 40mm, side parts 8mm, side sickles HB400 6mm, cutting edge HB500 150x20mm, without teeth, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.116	112	1,157 €
700	0.140	126	1,256 €
800	0.164	138	1,335 €
900	0.187	150	1,416 €
1000	0.211	160	1,515 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 2.5 TO 3.8 T



DEMOLITION AND SORTING BUCKET CLASS 2S WITH CROSS BARS

OPERATING WEIGHT 2.5 TO 3.8 T

Cross bars HB500, bar distance 40mm, side parts 10mm, cutting edge HB500 150x20mm, welded or screwed tooth system, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
600	0.107	105	4	1,352 €	1,326 €
700	0.130	116	5	1,448 €	1,434 €
800	0.152	127	5	1,539 €	1,525 €
900	0.173	138	5	1,643 €	1,625 €



DEMOLITION AND SORTING BUCKET CLASS 2S WITH CROSS BARS

OPERATING WEIGHT 2.5 TO 3.8 T

Cross bars HB500, bar distance 40mm, side parts 10mm, cutting edge HB500 150x20mm, without teeth, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.107	97	1,289 €
700	0.130	106	1,388 €
800	0.152	117	1,479 €
900	0.173	128	1,579 €

OPERATING WEIGHT 2.5 TO 3.8 T

LEVELING BEAM

OPERATING WEIGHT 2.5 TO 6.5 T

Wear plates made of highly wear-resistant HB450, cutting edge from HB500, with screwed adapter, suitable QC03HT



Width [mm]	Height [mm]	Weight [kg]	Price
1250	160	250	2,589 €
1500	160	268	2,921 €
Additional charge with roller			1,700 €

TELE BUCKET™

OPERATING WEIGHT 2 TO 6.5 T

Bottom and side parts 8mm, cutting edge HB500 150x20mm, suitable QC03HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
150	600	42	729 €
150	800	46	832 €



SPADE BUCKET

OPERATING WEIGHT 2 TO 6.5 T

Bottom and side parts 10mm, cutting edge HB500 200x20mm, suitable double adapter QC03/QC03HT

Cutting edge [mm]	Length [mm]	Weight [kg]	Price
320	1000	95	994 €
Additional charge with replaceable blade			110 €



OPERATING WEIGHT 2.5 TO 3.8 T



ROOT CUTTER

OPERATING WEIGHT 2 TO 6.5 T

Cutting edge HB450 15mm, suitable QC03HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
125	290	38	874 €



RIPPER TOOTH

OPERATING WEIGHT 2 TO 6.5 T

HB450 leg with changeable tooth tips, ripper tooth J250, suitable QC03HT

Height [mm]	Leg [mm]	Weight [kg]	Price
479	50	68	895 €
Special tooth for clearing work			147 €



GRAB RAKE

OPERATING WEIGHT 2 TO 3.8 T

HB450 legs with changeable ripper tooth, leg thickness 30mm, ripper tooth J200, suitable QC03HT

Legs	Width [mm]	Weight [kg]	Price
3	600	84	1,270 €
4	800	107	1,535 €

OPERATING WEIGHT 2.5 TO 3.8 T

EXCAVATOR RAKE

OPERATING WEIGHT 2 TO 6.5 T

HB450 legs, leg thickness 12mm, leg spacing 80mm, suitable QC03HT

Width [mm]	Legs	Weight [kg]	Price
1500	17	95	1,457 €
2000	23	125	1,609 €



STACKING SYSTEM

FEMII, max. load capacity to 2.5 t, with stand, suitable QC03HT


Fork carrier width [mm]	Fork prongs length [mm]	Weight [kg]	Price
1200	1200	115	2,639 €



When ordering, please specify if you are using the stacking system with a tilt rotator and the type of the tiltrotator.

MOUNTING PLATE

Type	Price with drilling pattern
QC03	583 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 3.15 t

Type	Weight [kg]	Price
QC03	30	678 €



OPERATING WEIGHT 3.8 TO 5 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 2 TO 6.5 T

Compatible with system Lehnhoff, hydraulic Quick coupler with single- or double-acting cylinder and drop protection

Type	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M	mechanical	-	30	1,145 €
QC03SHF	hydraulic	single-acting	32	1,613 €
QC03Hp	hydraulic	double-acting	33	2,130 €
Installation kit QC03SHF, single-acting (12V or 24V)				468 €
Installation kit QC03Hp, double-acting (12V or 24V)				802 €
Additional charge with welded load hook 3 t				187 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 4 TO 6.2 T

Quick coupler QuickChange with hydraulic tilt motor from HKS incl. load safety valve, incl. hose holder*, tilt range 178°

Type	Operating weight [t]	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M-BV125	4 to 6.2	mechanical	-	102	6,466 €
QC03SHF-BV125	4 to 6.2	hydraulic	single-acting	104	7,034 €
QC03Hp-BV125	4 to 6.2	hydraulic	double-acting	106	7,440 €
Installation kit QC03SHF, single-acting (12V or 24V)					468 €
Installation kit QC03Hp, double-acting (12V or 24V)					802 €
Additional charge with welded load hook 3 t					187 €


* for hydraulic Quick couplers

OPERATING WEIGHT 3.8 TO 5 T

TILT COUPLER – QUICKCHANGE/ POWERTILT


OPERATING WEIGHT 3 TO 5 T

Quick coupler QuickChange with hydraulic tilt motor from PowerTilt incl. manifold and oil connection for hydraulic Quick coupler, tilt range 180°



Type	Operating weight [t]	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M-PT050	3 to 5	mechanical	-	79	7,166 €
QC03SHF-PT050	3 to 5	hydraulic	single-acting	80	7,655 €
QC03Hp-PT050	3 to 5	hydraulic	double-acting	82	8,000 €
Installation kit QC03SHF, single-acting (12V or 24V)					468 €
Installation kit QC03Hp, double-acting (12V or 24V)					802 €
Additional charge with welded load hook 3 t					187 €

OPERATING WEIGHT 3.8 TO 5 T



COMBI ADAPTER

Type	Weight [kg]	Price
QC01/QC03	25	745 €
QC03/QC08	42	830 €



WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC03	15	172 €
QC03HT	17	172 €
QC03HT with base plate (420x250x15mm)	26	246 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 1 TO 5 T

Type	Weight [kg]	Price
OQ40	15	260 €
OQ40-5	15	271 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC03	23	502 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC03	32	834 €

OPERATING WEIGHT 3.8 TO 5 T

BACKHOE BUCKET CLASS 3

OPERATING WEIGHT 3.8 TO 5 T

Bottom and side parts 8mm, side cutting edges 12mm,
side sickles HB400 6mm, cutting edge HB400 150x20mm,
welded or screwed tooth system, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
300	0.061	81	3	834 €	780 €
400	0.089	93	3	875 €	818 €
500	0.119	107	4	942 €	871 €
600	0.149	118	4	984 €	910 €
800	0.212	143	5	1,092 €	1,001 €

Additional charge with welded front-insert blade 150x16mm per meter,
without replacement teeth

187 €

Additional charge as clay bucket or with cutting edge moved forward 100mm

+15 %

We recommend a welded tooth system.

BACKHOE BUCKET CLASS 3

OPERATING WEIGHT 3.8 TO 5 T

Bottom and side parts 8mm, side cutting edges 12mm,
side sickles HB400 6mm, cutting edge HB400 150x20mm,
without teeth (with drill holes), suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
300	0.061	75	752 €
400	0.089	87	790 €
500	0.119	99	834 €
600	0.149	110	873 €
800	0.212	133	955 €

Additional charge as clay bucket or with cutting edge moved forward 100mm

+15 %

OPERATING WEIGHT 3.8 TO 5 T



HD-BACKHOE BUCKET CLASS 3

OPERATING WEIGHT 3.8 TO 5 T

Bottom and side parts HB450 8mm, side cutting edges HB450 12mm, side parts put on bottom, cutting edge HB500 150x20mm, welded tooth system, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	teeth	Price
300	0.061	81	3	975 €
400	0.089	93	3	1,036 €
500	0.119	107	4	1,117 €
600	0.149	118	4	1,178 €
800	0.212	143	5	1,315 €

Additional charge with welded front-insert blade 150x20mm per meter, without replacement teeth

187 €

Additional charge with cutting edge moved forward 100mm

+15 %



HD-BACKHOE BUCKET CLASS 3

OPERATING WEIGHT 3.8 TO 5 T

Bottom and side parts HB450 8mm, side cutting edges HB450 12mm, side parts put on bottom, cutting edge HB500 150x20mm, without teeth, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
300	0.061	75	909 €
400	0.089	87	970 €
500	0.119	99	1,029 €
600	0.149	110	1,090 €
800	0.212	133	1,205 €

Additional charge with cutting edge moved forward 100mm

+15 %

OPERATING WEIGHT 3.8 TO 5 T

DITCH-CLEANING BUCKET RIGID CLASS 3

OPERATING WEIGHT 3.8 TO 6.5 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 150x20mm, stiffening sickle, rear cutting edge HB400, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1200	0.197	172	1,289 €
1400	0.232	194	1,413 €
1500	0.250	206	1,426 €
1600	0.268	217	1,491 €

Additional charge with screw-on reversible blade 150x20mm per meter

338 €

DITCH-CLEANING BUCKET CLASS 3 WITH CYLINDER

OPERATING WEIGHT 3.8 TO 6.5 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 150x20mm, stiffening sickle, rear cutting edge HB400, 1 cylinder 2x45°, suitable QC03HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1200	0.197	225	2,680 €
1400	0.232	248	2,721 €
1500	0.250	259	2,743 €
1600	0.268	270	2,763 €

Additional charge with 2. cylinder

711 €


Additional charge with screw-on reversible blade 150x20mm per meter

338 €

Additional charge with adapter OQ40 hydraulic

1,384 €

OPERATING WEIGHT 3.8 TO 5 T



DITCH-CLEANING BUCKET CLASS 3 WITH TILT MOTOR

OPERATING WEIGHT 3.8 TO 6.2 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 150x20mm, stiffening sickle, rear cutting edge HB400, tilt range 2x50° suitable QC03HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV125
1200	0.192	295	5,883 €
1400	0.226	309	5,948 €
1600	0.261	323	6,010 €
1800	0.296	338	6,075 €
Additional charge with adapter OQ40 hydraulic			1,384 €



TILT BACKHOE BUCKET CLASS 3 WITH CYLINDER

OPERATING WEIGHT 3.8 TO 5 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 200x20mm, center pin 40mm, steel bushings inside swivel head, 2 cylinder 2x45°, suitable QC03HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1000	0.196	234	3,357 €
1200	0.241	259	3,453 €
1400	0.286	285	3,546 €
Additional charge with adapter OQ40 hydraulic			1,384 €

OPERATING WEIGHT 3.8 TO 5 T

TILT BACKHOE BUCKET CLASS 3 WITH TILT MOTOR

OPERATING WEIGHT 3.8 TO 5 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 200x20mm, tilt range 2x50°, suitable QC03HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV125
1000	0.168	269	6,144 €
1200	0.202	286	6,242 €
1400	0.240	316	6,331 €
Additional charge with adapter OQ40 hydraulic			1,384 €

OPERATING WEIGHT 3.8 TO 5 T



LOADING BUCKET CLASS 3

OPERATING WEIGHT 3.8 TO 5 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 200x20mm, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1000	0.196	152	1,478 €
1200	0.241	177	1,561 €
1400	0.286	203	1,634 €



TILTROTATOR BUCKET CLASS 3

OPERATING WEIGHT 3 TO 5 T

Bottom HB450 6mm, side parts 6mm, side cutting edges HB450 12mm, cutting edge HB500 150x16mm, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
900	0.158	98	1,404 €
1000	0.180	107	1,453 €
1100	0.203	116	1,507 €

OPERATING WEIGHT 3.8 TO 5 T

DEMOLITION AND SORTING BUCKET CLASS 3 WITH SKELETON BARS

OPERATING WEIGHT 3.8 TO 5 T

Skeleton bars 15mm, bar distance 40mm, side parts 10mm, side sickles HB400 6mm, cutting edge HB500 150x20mm, welded or screwed tooth system, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
600	0.149	146	4	1,403 €	1,358 €
800	0.212	172	5	1,559 €	1,502 €
900	0.243	182	5	1,648 €	1,587 €
1000	0.274	198	5	1,753 €	1,707 €

The bar distance may vary on the outer bars, depending on the cutting edge.

DEMOLITION AND SORTING BUCKET CLASS 3 WITH SKELETON BARS

OPERATING WEIGHT 3.8 TO 5 T

Skeleton bars 15mm, bar distance 40mm, side parts 10mm, side sickles HB400 6mm, cutting edge HB500 150x20mm, without teeth, suitable QC03HT or OQ40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.149	138	1,321 €
800	0.212	162	1,456 €
900	0.243	172	1,541 €
1000	0.274	188	1,661 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 3.8 TO 5 T



DEMOLITION AND SORTING BUCKET CLASS 3 WITH CROSS BARS

OPERATING WEIGHT 3.8 TO 5 T

Cross bars HB500, bar distance 40mm, side parts 12mm, cutting edge HB500 150x20mm, welded or screwed tooth system, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
600	0.138	134	4	1,491 €	1,452 €
800	0.196	157	5	1,692 €	1,645 €
900	0.225	169	5	1,809 €	1,761 €
1000	0.254	181	5	1,935 €	1,879 €



DEMOLITION AND SORTING BUCKET CLASS 3 WITH CROSS BARS

OPERATING WEIGHT 3.8 TO 5 T

Cross bars HB500, bar distance 40mm, side parts 12mm, cutting edge HB500 150x20mm, without teeth, suitable QC03HT or OQ40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.138	126	1,416 €
800	0.196	147	1,599 €
900	0.225	159	1,715 €
1000	0.254	171	1,833 €

OPERATING WEIGHT 3.8 TO 5 T

LEVELING BEAM

OPERATING WEIGHT 2.5 TO 6.5 T

Wear plates made of highly wear-resistant HB450, cutting edge from HB500, with screwed adapter, suitable QC03HT



Width [mm]	Height [mm]	Weight [kg]	Price
1250	160	250	2,589 €
1500	160	268	2,921 €
Additional charge with roller			1,700 €

TELE BUCKET™

OPERATING WEIGHT 2 TO 6.5 T

Bottom and side parts 8mm, cutting edge HB500 150x20mm, suitable QC03HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
150	600	42	729 €
150	800	46	832 €



SPADE BUCKET

OPERATING WEIGHT 2 TO 6.5 T

Bottom and side parts 10mm, cutting edge HB500 200x20mm, suitable double adapter QC03/QC03HT

Cutting edge [mm]	Length [mm]	Weight [kg]	Price
320	1000	95	994 €
Additional charge with replaceable blade			110 €



OPERATING WEIGHT 3.8 TO 5 T



ROOT CUTTER

OPERATING WEIGHT 2 TO 6.5 T

Cutting edge HB450 15mm, suitable QC03HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
125	290	38	874 €



RIPPER TOOTH

OPERATING WEIGHT 2 TO 6.5 T

HB450 leg with changeable tooth tips, ripper tooth J250, suitable QC03HT

Height [mm]	Leg [mm]	Weight [kg]	Price
479	50	68	895 €
Special tooth for clearing work			147 €



GRAB RAKE

OPERATING WEIGHT 3.8 TO 6.5 T

HB450 legs with changeable ripper tooth, leg thickness 35mm, ripper tooth J200, suitable QC03HT

Legs	Width [mm]	Weight [kg]	Price
3	700	109	1,608 €
4	900	139	1,972 €

OPERATING WEIGHT 3.8 TO 5 T

EXCAVATOR RAKE

OPERATING WEIGHT 2 TO 6.5 T

HB450 legs, leg thickness 12mm, leg spacing 80mm, suitable QC03HT

Width [mm]	Legs	Weight [kg]	Price
1500	17	95	1,457 €
2000	23	125	1,609 €



STACKING SYSTEM

FEMII, max. load capacity to 2.5 t, with stand, suitable QC03HT


Fork carrier width [mm]	Fork prongs length [mm]	Weight [kg]	Price
1200	1200	115	2,639 €



When ordering, please specify if you are using the stacking system with a tilt rotator and the type of the tiltrotator.

MOUNTING PLATE

Type	Price with drilling pattern
QC03	583 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 3.15 t

Type	Weight [kg]	Price
QC03	30	678 €



OPERATING WEIGHT 5 TO 6.5 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 2 TO 6.5 T

Compatible with system Lehnhoff, hydraulic Quick coupler with single- or double-acting cylinder and drop protection

Type	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M	mechanical	-	30	1,145 €
QC03SHF	hydraulic	single-acting	32	1,613 €
QC03Hp	hydraulic	double-acting	33	2,130 €
Installation kit QC03SHF, single-acting (12V or 24V)				468 €
Installation kit QC03Hp, double-acting (12V or 24V)				802 €
Additional charge with welded load hook 3 t				187 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 4 TO 6.5 T

Quick coupler QuickChange with hydraulic tilt motor from HKS incl. load safety valve, incl. hose holder*, tilt range 178°

Type	Operating weight [t]	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M-BV125	4 to 6.2	mechanical	-	102	6,466 €
QC03SHF-BV125	4 to 6.2	hydraulic	single-acting	104	7,034 €
QC03Hp-BV125	4 to 6.2	hydraulic	double-acting	106	7,440 €
QC03M-BV130	6 to 6.5	mechanical	-	115	7,090 €
QC03SHF-BV130	6 to 6.5	hydraulic	single-acting	117	7,664 €
QC03Hp-BV130	6 to 6.5	hydraulic	double-acting	119	8,065 €
Installation kit QC03SHF, single-acting (12V or 24V)					468 €
Installation kit QC03Hp, double-acting (12V or 24V)					802 €
Additional charge with welded load hook 3 t					187 €


* for hydraulic Quick couplers

OPERATING WEIGHT 5 TO 6.5 T

TILT COUPLER – QUICKCHANGE/ POWERTILT


OPERATING WEIGHT 5 TO 6.5 T

Quick coupler QuickChange with hydraulic tilt motor from PowerTilt incl. manifold and oil connection for hydraulic Quick coupler, tilt range 180°



Type	Operating weight [t]	Version	Cylinder [hydr.]	Weight [kg]	Price
QC03M-PT070	5 to 6.5	mechanical	-	119	9,211 €
QC03SHF-PT070	5 to 6.5	hydraulic	single-acting	120	9,731 €
QC03Hp-PT070	5 to 6.5	hydraulic	double-acting	122	10.051 €
Installation kit QC03SHF, single-acting (12V or 24V)					468 €
Installation kit QC03Hp, double-acting (12V or 24V)					802 €
Additional charge with welded load hook 3 t					187 €

OPERATING WEIGHT 5 TO 6.5 T



COMBI ADAPTER

Type	Weight [kg]	Price
QC01/QC03	25	745 €
QC03/QC08	42	830 €



WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC03	15	172 €
QC03HT	17	172 €
QC03HT with base plate (420x250x15mm)	26	246 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 1 TO 12 T

Type	Operating weight [t]	Weight [kg]	Price
OQ40-5	1 to 6	15	271 €
OQ45/OQ45-5	5 to 12	29	375 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC03	23	502 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC03	32	834 €

OPERATING WEIGHT 5 TO 6.5 T

BACKHOE BUCKET CLASS 3S

OPERATING WEIGHT 5 TO 6.5 T

Bottom and side parts 8mm, side cutting edges 12mm,
side sickles HB400 6mm, cutting edge HB400 150x20mm*,
welded or screwed tooth system, suitable QC03HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
300	0.078	93	3	930 €	869 €
400	0.114	105	3	977 €	914 €
500	0.152	120	4	1,050 €	975 €
600	0.192	133	4	1,097 €	1,019 €
800	0.274	160	5	1,217 €	1,124 €

Additional charge with welded front-insert blade 150x20mm per meter,
without replacement teeth

204 €

Additional charge as clay bucket or with cutting edge moved forward 100mm

+15 %

Additional charge with adapter QC08HT

82 €

* for screweden teeth – cutting edge 200x20mm

BACKHOE BUCKET CLASS 3S

OPERATING WEIGHT 5 TO 6.5 T

Bottom and side parts 8mm, side cutting edges 12mm,
side sickles HB400 6mm, cutting edge HB400 200x20mm,
without teeth (with drill holes), suitable QC03HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
300	0.074	87	842 €
400	0.108	100	887 €
500	0.144	113	938 €
600	0.182	126	1,003 €
800	0.259	152	1,078 €

Additional charge as clay bucket or with cutting edge moved forward 100mm

+15 %

Additional charge with adapter QC08HT

82 €

OPERATING WEIGHT 5 TO 6.5 T



HD-BACKHOE BUCKET CLASS 3S

OPERATING WEIGHT 5 TO 6.5 T

Bottom and side parts HB450 8mm, side cutting edges HB450 12mm, side parts put on bottom, cutting edge HB500 150x20mm, welded tooth system, suitable QC03HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	teeth	Price
300	0.078	93	3	1,072 €
400	0.114	105	3	1,134 €
500	0.152	120	4	1,226 €
600	0.192	133	4	1,288 €
800	0.274	160	5	1,442 €
Additional charge with welded front-insert blade 150x20mm per meter, without replacement teeth				204 €
Additional charge with cutting edge moved forward 100mm				+15 %
Additional charge with adapter QC08HT				82 €



HD-BACKHOE BUCKET CLASS 3S

OPERATING WEIGHT 5 TO 6.5 T

Bottom and side parts HB450 8mm, side cutting edges HB450 12mm, side parts put on bottom, cutting edge HB500 150x20mm, without teeth, suitable QC03HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
300	0.074	87	1,010 €
400	0.108	100	1,072 €
500	0.144	113	1,143 €
600	0.182	126	1,205 €
800	0.259	152	1,338 €
Additional charge with cutting edge moved forward 100mm			+15 %
Additional charge with adapter QC08HT			82 €

OPERATING WEIGHT 5 TO 6.5 T

DITCH-CLEANING BUCKET RIGID CLASS 3

OPERATING WEIGHT 3.8 TO 6.5 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 150x20mm, stiffening sickle, rear cutting edge HB400, suitable QC03HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1200	0.197	172	1,289 €
1400	0.232	194	1,413 €
1500	0.250	206	1,426 €
1600	0.268	217	1,491 €
Additional charge with screw-on reversible blade 150x20mm per meter			338 €
Additional charge with adapter QC08HT			82 €

DITCH-CLEANING BUCKET CLASS 3 WITH CYLINDER


OPERATING WEIGHT 3.8 TO 6.5 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 150x20mm, stiffening sickle, rear cutting edge HB400, 1 cylinder 2x45°, suitable QC03HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1200	0.197	225	2,680 €
1400	0.232	248	2,721 €
1500	0.250	259	2,743 €
1600	0.268	270	2,763 €
Additional charge with 2. cylinder			711 €
Additional charge with screw-on reversible blade 150x20mm per meter			338 €
Additional charge with adapter QC08HT with reinforced tilt head from 1400mm cutting edge			502 €
Additional charge with adapter OQ45 or Q45-5 hydraulic with reinforced tilt head from 1400mm cutting edge			2,188 €

OPERATING WEIGHT 5 TO 6.5 T



DITCH-CLEANING BUCKET CLASS 3 WITH TILT MOTOR

OPERATING WEIGHT 3.8 TO 6.2 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 150x20mm, stiffening sickle, rear cutting edge HB400, tilt range 2x50°, suitable QC03HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV125
1200	0.192	295	5,883 €
1400	0.226	309	5,948 €
1600	0.261	323	6,010 €
1800	0.296	338	6,075 €
Additional charge with adapter QC08HT			82 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic			1,686 €



TILT BACKHOE BUCKET CLASS 3S WITH CYLINDER

OPERATING WEIGHT 5 TO 6.5 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 200x20mm, center pin 50mm, steel bushings inside swivel head, 2 cylinder 2x45°, suitable QC03HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1300	0.301	294	3,810 €
1400	0.327	308	3,865 €
1500	0.353	321	3,922 €
Additional charge with adapter QC08HT			82 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic			1,686 €

OPERATING WEIGHT 5 TO 6.5 T

TILT BACKHOE BUCKET CLASS 3S WITH TILT MOTOR

OPERATING WEIGHT 5 TO 6.5 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 200x20mm, tilt range 2x50°, suitable QC03HT



Cutting edge [mm]	Capacity [m³]	Weight with BV125 [kg]	Price with BV125 to 6.2 t	Weight with BV130 [kg]	Price with BV130 to 6.5 t
1300	0.277	343	6,758 €	379	7,117 €
1400	0.300	356	6,825 €	392	7,184 €
1500	0.323	372	6,846 €	408	7,205 €
Additional charge with adapter QC08HT					82 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic					1,686 €

OPERATING WEIGHT 5 TO 6.5 T



LOADING BUCKET CLASS 3S

OPERATING WEIGHT 5 TO 6.5 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 200x20mm, suitable QC03HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1300	0.301	202	1,790 €
1400	0.327	216	1,832 €
1500	0.353	229	1,873 €
Additional charge with adapter QC08HT			82 €



TILTROTATOR BUCKET CLASS 3S

OPERATING WEIGHT 4 TO 6.5 T

Bottom HB450 6mm, side parts 6mm, side cutting edges HB450 12mm, cutting edge HB500 150x16mm, suitable QC03HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
900	0.220	118	1,825 €
1100	0.286	140	1,886 €
1200	0.318	152	1,948 €
Additional charge with adapter QC08HT			82 €

OPERATING WEIGHT 5 TO 6.5 T

DEMOLITION AND SORTING BUCKET CLASS 3S WITH SKELETON BARS

OPERATING WEIGHT 5 TO 6.5 T

Skeleton bars 15mm, bar distance 40mm, side parts 10mm, side sickles HB400 6mm, cutting edge HB500 150x20mm, welded or screwed tooth system, suitable QC03HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
600	0.192	172	4	1,704 €	1,658 €
800	0.274	210	5	1,871 €	1,803 €
900	0.316	230	5	1,937 €	1,871 €
1000	0.357	249	6	2,116 €	2,065 €
Additional charge with adapter QC08HT				82 €	

The bar distance may vary on the outer bars, depending on the cutting edge.

DEMOLITION AND SORTING BUCKET CLASS 3S WITH SKELETON BARS

OPERATING WEIGHT 5 TO 6.5 T

Skeleton bars 15mm, bar distance 40mm, side parts 10mm, side sickles HB400 6mm, cutting edge HB500 150x20mm, without teeth, suitable QC03HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.182	165	1,622 €
800	0.259	202	1,757 €
900	0.298	223	1,825 €
1000	0.336	239	2,010 €
Additional charge with adapter QC08HT			82 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 5 TO 6.5 T



DEMOLITION AND SORTING BUCKET CLASS 3S WITH CROSS BARS

OPERATING WEIGHT 5 TO 6.5 T

Cross bars HB500, bar distance 40mm, side parts 12mm, cutting edge HB500 200x20mm, welded or screwed tooth system, suitable QC03HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price teeth welded	Price teeth screwed
600	0.178	151	4	1,710 €	1,671 €
800	0.254	177	5	1,930 €	1,887 €
900	0.293	190	5	2,048 €	1,999 €
1000	0.331	203	6	2,172 €	2,116 €

Additional charge with adapter QC08HT

82 €



DEMOLITION AND SORTING BUCKET CLASS 3S WITH CROSS BARS

OPERATING WEIGHT 5 TO 6.5 T

Cross bars HB500, bar distance 40mm, side parts 12mm, cutting edge HB500 200x20mm, without teeth, suitable QC03HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.169	144	1,634 €
800	0.240	169	1,841 €
900	0.276	183	1,953 €
1000	0.311	193	2,060 €

Additional charge with adapter QC08HT

82 €

OPERATING WEIGHT 5 TO 6.5 T

LEVELING BEAM

OPERATING WEIGHT 2.5 TO 6.5 T

Wear plates made of highly wear-resistant HB450, cutting edge from HB500, with screwed adapter, suitable QC03HT

Width [mm]	Height [mm]	Weight [kg]	Price
1250	160	250	2,589 €
1500	160	268	2,921 €
Additional charge with roller			1,700 €



TELE BUCKET™

OPERATING WEIGHT 2 TO 6.5 T

Bottom and side parts 8mm, cutting edge HB500 150x20mm, suitable QC03HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
150	600	42	729 €
150	800	46	832 €



SPADE BUCKET

OPERATING WEIGHT 2 TO 6.5 T

Bottom and side parts 10mm, cutting edge HB500 200x20mm, suitable double adapter QC03/QC03HT

Cutting edge [mm]	Length [mm]	Weight [kg]	Price
320	1000	95	994 €
Additional charge with replaceable blade			110 €



OPERATING WEIGHT 5 TO 6.5 T



ROOT CUTTER

OPERATING WEIGHT 2 TO 6.5 T

Cutting edge HB450 15mm, suitable QC03HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
125	290	38	874 €



RIPPER TOOTH

OPERATING WEIGHT 2 TO 6.5 T

HB450 leg with changeable tooth tips, ripper tooth J250, suitable QC03HT

Height [mm]	Leg [mm]	Weight [kg]	Price
479	50	68	895 €
Special tooth for clearing work			147 €



GRAB RAKE

OPERATING WEIGHT 3.8 TO 6.5 T

HB450 legs with changeable ripper tooth, leg thickness 35mm, ripper tooth J200, suitable QC03HT

Legs	Width [mm]	Weight [kg]	Price
3	700	109	1,608 €
4	900	139	1,972 €

OPERATING WEIGHT 5 TO 6.5 T

EXCAVATOR RAKE

OPERATING WEIGHT 2 TO 6.5 T

HB450 legs, leg thickness 12mm, leg spacing 80mm, suitable QC03HT

Width [mm]	Legs	Weight [kg]	Price
1500	17	95	1,457 €
2000	23	125	1,609 €



STACKING SYSTEM

FEMII, max. load capacity to 2.5 t, with stand, suitable QC03HT


Fork carrier width [mm]	Fork prongs length [mm]	Weight [kg]	Price
1200	1200	115	2,639 €



When ordering, please specify if you are using the stacking system with a tilt rotator and the type of the tiltrotator.

MOUNTING PLATE

Type	Price with drilling pattern
QC03	583 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 3.15 t

Type	Weight [kg]	Price
QC03	30	678 €



OPERATING WEIGHT 6.5 TO 8.8 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 6.5 TO 12 T

Compatible with system Lehnhoff, hydraulic Quick coupler with double-acting cylinder and drop protection

Type	Version	Weight [kg]	Price
QC08M	mechanical	85	2,351 €
QC08Hp	hydraulic	100	3,439 €
Installation kit QC08Hp (12V or 24V)			802 €
Additional charge with welded load hook 5 t			262 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 6.5 TO 10 T

Quick coupler QuickChange with hydraulic tilt motor from HKS incl. load safety valve, incl. hose holder*, tilt range 178°

Type	Operating weight [t]	Version	Weight [kg]	Price
QC08M-BV130	6.5 to 7.5	mechanical	166	8,014 €
QC08Hp-BV130	6.5 to 7.5	hydraulic	180	9,638 €
QC08M-BV160	7.3 to 10	mechanical	193	9,328 €
QC08Hp-BV160	7.3 to 10	hydraulic	207	10,912 €
Installation kit QC08Hp (12V or 24V)				802 €
Additional charge with welded load hook 5 t				262 €


*for hydraulic Quick couplern

OPERATING WEIGHT 6.5 TO 8.8 T

TILT COUPLER – QUICKCHANGE/ POWERTILT


OPERATING WEIGHT 7 TO 10 T

Quick coupler QuickChange with hydraulic tilt motor from PowerTilt incl. manifold and oil connection for hydraulic Quick coupler, tilt range 180°



Type	Operating weight [t]	Version	Weight [kg]	Price
QC08M-PT100	7 to 10	mechanical	190	10,828 €
QC08Hp-PT100	7 to 10	hydraulic	198	12,322 €
Installation kit QC08Hp (12V or 24V)				802 €
Additional charge with welded load hook 5 t				262 €

OPERATING WEIGHT 6.5 TO 8.8 T




COMBI ADAPTER

Type	Weight [kg]	Price
QC03/QC08	42	830 €



WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC08	30	302 €
QC08HT	30	302 €
QC08HT with base plate (460x350x20mm)	54	533 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 5 TO 12 T

Type	Weight [kg]	Price
OQ45/OQ45-5	29	375 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC08	45	781 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC08	57	1,213 €

OPERATING WEIGHT 6.5 TO 8.8 T

BACKHOE BUCKET CLASS 4

OPERATING WEIGHT 6.5 TO 8.8 T

Bottom and side parts 8mm, side cutting edges 15mm, cutting edge HB400 200x20mm, welded tooth system, suitable QC08HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
300*	0.078	122	3	1,420 €
400	0.116	137	3	1,482 €
600	0.197	171	4	1,663 €
800	0.283	205	5	1,842 €
1000	0.371	235	6	1,967 €
Additional charge with welded front-insert blade 200x20mm per meter, without replacement teeth				234 €
Additional charge as clay bucket or with cutting edge moved forward 100mm				+15 %
Additional charge with wear stripes per meter				345 €

BACKHOE BUCKET CLASS 4

OPERATING WEIGHT 6.5 TO 8.8 T

Bottom and side parts 8mm, side cutting edges 15mm, cutting edge HB400 200x20mm, without teeth, suitable QC08HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
300*	0.069	105	1,312 €
400	0.103	120	1,375 €
600	0.174	150	1,519 €
800	0.249	179	1,663 €
1000	0.324	208	1,788 €
Additional charge as clay bucket or with cutting edge moved forward 100mm			+15 %
Additional charge with wear stripes per meter			345 €

*Marked cutting widths only with liwithed digging depth.

OPERATING WEIGHT 6.5 TO 8.8 T



HD-BACKHOE BUCKET CLASS 4

OPERATING WEIGHT 6.5 TO 8.8 T

Bottom and side parts HB450 8mm, side cutting edges HB450 15mm, side parts put on bottom, cutting edge HB500 200x25mm, welded tooth system, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
400	0.116	137	3	1,613 €
600	0.197	171	4	1,821 €
800	0.283	205	5	2,040 €
1000	0.371	235	5	2,201 €
Additional charge with welded front-insert blade 200x20mm per meter, without replacement teeth				234 €
Additional charge with cutting edge moved forward 100mm				+15 %
Additional charge with wear stripes per meter				345 €



HD-BACKHOE BUCKET CLASS 4

OPERATING WEIGHT 6.5 TO 8.8 T

Bottom and side parts HB450 8mm, side cutting edges HB450 15mm, side parts put on bottom, cutting edge HB500 200x25mm, without teeth, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
400	0.103	120	1,490 €
600	0.174	150	1,657 €
800	0.249	179	1,876 €
1000	0.324	208	1,996 €
Additional charge with cutting edge moved forward 100mm			+15 %
Additional charge with wear stripes per meter			345 €

OPERATING WEIGHT 6.5 TO 8.8 T

DITCH-CLEANING BUCKET RIGID CLASS 3S

OPERATING WEIGHT 6.5 TO 12 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 200x20mm, stiffening sickle, rear cutting edge HB400, suitable QC08HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	0.311	268	2,054 €
1500	0.335	283	2,117 €
1600	0.360	297	2,263 €
1800	0.408	333	2,410 €
2000	0.456	362	2,562 €
Additional charge with screw-on reversible blade 150x20mm per meter			338 €

DITCH-CLEANING BUCKET CLASS 3S WITH CYLINDER


OPERATING WEIGHT 6.5 TO 12 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 200x20mm, stiffening sickle, rear cutting edge HB400, 1 cylinder 2x45°, suitable QC08HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	0.311	375	4,398 €
1500	0.335	389	4,421 €
1600	0.360	404	4,445 €
1800	0.408	439	4,492 €
2000	0.456	469	4,539 €
Additional charge with 2. cylinder			757 €
Additional charge with screw-on reversible blade 150x20mm per meter			338 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic			1,686 €

OPERATING WEIGHT 6.5 TO 8.8 T



DITCH-CLEANING BUCKET CLASS 3S WITH TILT MOTOR

OPERATING WEIGHT 6.5 TO 8.8 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 200x20mm, stiffening sickle, rear cutting edge HB400, tilt range 2x50°, suitable QC08HT

Cutting edge [mm]	Capacity [m³]	Weight with BV130 [kg]	Price with BV130 to 7.5 t	Weight with BV160 [kg]	Price with BV160 to 8.8 t
1400	0.308	455	7,659 €	515	8,242 €
1600	0.355	490	7,725 €	550	8,308 €
1800	0.402	530	7,796 €	590	8,374 €
2000	0.449	560	7,872 €	620	8,455 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic					1,686 €



TILT BACKHOE BUCKET CLASS 4 WITH CYLINDER

OPERATING WEIGHT 6.5 TO 8.8 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 200x20mm, center pin 50mm, steel bushings inside swivel head, 2 cylinder 2x45°, suitable QC08HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1300	0.380	336	4,200 €
1400	0.413	351	4,276 €
1500	0.446	366	4,355 €
Additional charge with 2. bottom or wear stripes per meter			345 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic			1,686 €

OPERATING WEIGHT 6.5 TO 8.8 T

TILT BACKHOE BUCKET CLASS 4 WITH TILT MOTOR

OPERATING WEIGHT 6.5 TO 8.8 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 200x20mm, tilt range 2x50°, suitable QC08HT



Cutting edge [mm]	Capacity [m³]	Weight with BV130 [kg]	Price with BV130 to 7.5 t	Weight with BV160 [kg]	Price with BV160 to 8.8 t
1300	0.332	538	7,507 €	478	8,177 €
1400	0.361	545	7,565 €	505	8,235 €
1500	0.410	565	7,611 €	530	8,287 €
Additional charge with 2. bottom or wear stripes per meter					345 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic					1,686 €

OPERATING WEIGHT 6.5 TO 8.8 T



LOADING BUCKET CLASS 4

OPERATING WEIGHT 6.5 TO 8.8 T

Bottom and side parts 8mm, side cutting edges HB450 12mm, cutting edge HB500 200x20mm, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1300	0.380	251	2,143 €
1400	0.413	266	2,185 €
1500	0.446	281	2,227 €



TILTROTATOR BUCKET CLASS 4

OPERATING WEIGHT 6 TO 9 T

Bottom HB450 6mm, side parts 6mm, side cutting edges HB450 12mm, cutting edge HB500 150x20mm, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1200	0.389	186	2,686 €
1400	0.471	212	2,901 €
1600	0.553	238	3,116 €

OPERATING WEIGHT 6.5 TO 8.8 T

DEMOLITION AND SORTING BUCKET CLASS 4 WITH SKELETON BARS

OPERATING WEIGHT 6.5 TO 8.8 T

Skeleton bars 20mm, bar distance 50mm, side parts 15mm, cutting edge HB500 200x20mm, welded tooth system, suitable QC08HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
600	0.197	214	4	2,169 €
800	0.283	265	5	2,397 €
900	0.327	274	5	2,544 €
1000	0.371	283	6	2,639 €

The bar distance may vary on the outer bars, depending on the cutting edge.

DEMOLITION AND SORTING BUCKET CLASS 4 WITH SKELETON BARS

OPERATING WEIGHT 6.5 TO 8.8 T

Skeleton bars 20mm, bar distance 50mm, side parts 15mm, cutting edge HB500 200x20mm, without teeth, suitable QC08HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.174	193	2,025 €
800	0.249	239	2,218 €
900	0.287	248	2,365 €
1000	0.324	256	2,460 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 6.5 TO 8.8 T



DEMOLITION AND SORTING BUCKET CLASS 4 WITH CROSS BARS

OPERATING WEIGHT 6.5 TO 8.8 T

Cross bars HB500, bar distance 50mm, side parts 15mm, cutting edge HB500 200x20mm, welded tooth system, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
600	0.182	188	4	2,169 €
800	0.262	214	5	2,397 €
900	0.303	227	5	2,544 €
1000	0.344	240	6	2,639 €



DEMOLITION AND SORTING BUCKET CLASS 4 WITH CROSS BARS

OPERATING WEIGHT 6.5 TO 8.8 T

Cross bars HB500, bar distance 50mm, side parts 15mm, cutting edge HB500 200x20mm, without teeth, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.161	167	2,025 €
800	0.231	188	2,218 €
900	0.266	201	2,365 €
1000	0.300	213	2,460 €

OPERATING WEIGHT 6.5 TO 8.8 T

LEVELING BEAM

OPERATING WEIGHT 6.5 TO 12 T

Wear plates made of highly wear-resistant HB450, cutting edge from HB500, with screwed adapter, suitable QC08HT

Width [mm]	Height [mm]	Weight [kg]	Price
1500	160	280	3,003 €
2000	160	318	3,526 €
Additional charge with roller			1,700 €



TELE BUCKET™

OPERATING WEIGHT 6.5 TO 8.8 T

Bottom and side parts 8mm, cutting edge HB500 150x20mm, suitable QC08HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
150	800	85	1,145 €
150	1000	110	1,228 €



SPADE BUCKET

OPERATING WEIGHT 6.5 TO 12 T

Bottom and side parts 12mm, cutting edge HB500 200x25mm, suitable double adapter QC08/QC08HT

Cutting edge [mm]	Length [mm]	Weight [kg]	Price
400	1500	225	1,712 €
Additional charge with replaceable blade			175 €



OPERATING WEIGHT 6.5 TO 8.8 T



ROOT CUTTER

OPERATING WEIGHT 6.5 TO 12 T

Cutting edge HB450 20mm, suitable QC08HT

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
175	315	73	1,197 €



RIPPER TOOTH

OPERATING WEIGHT 6.5 TO 8.8 T

HB450 leg with changeable tooth tips, ripper tooth J300, suitable QC08HT

Height [mm]	Leg [mm]	Weight [kg]	Price
775	60	160	1,665 €
Special tooth for clearing work			175 €



GRAB RAKE

OPERATING WEIGHT 6.5 TO 8.8 T

HB450 legs with changeable ripper tooth, leg thickness 35mm, ripper tooth J200, suitable QC08HT

Legs	Width [mm]	Weight [kg]	Price
3	800	136	2,081 €
4	1100	173	2,513 €

OPERATING WEIGHT 6.5 TO 8.8 T

EXCAVATOR RAKE

OPERATING WEIGHT 6.5 TO 12 T

HB450 legs, leg thickness 15mm, leg spacing 120mm, suitable QC08HT

Width [mm]	Legs	Weight [kg]	Price
2500	20	235	2,353 €



STACKING SYSTEM

FEMII, max. load capacity to 2.5 t, with stand, suitable QC08HT


Fork carrier width [mm]	Fork prongs length [mm]	Weight [kg]	Price
1200	1200	139	2,853 €

When ordering, please specify if you are using the stacking system with a tilt rotator and the type of the tiltrotator.



MOUNTING PLATE

Type	Price with drilling pattern
QC08	955 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 5.3 t

Type	Weight [kg]	Price
QC08	54	1,038 €



OPERATING WEIGHT 8.8 TO 12 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 6.5 TO 12 T

Compatible with system Lehnhoff, hydraulic Quick coupler with double-acting cylinder and drop protection

Type	Version	Weight [kg]	Price
QC08M	mechanical	85	2,351 €
QC08Hp	hydraulic	100	3,439 €
Installation kit QC08Hp (12V or 24V)			802 €
Additional charge with welded load hook 5 t			262 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 7.3 TO 12 T

Quick coupler QuickChange with hydraulic tilt motor with HKS incl. load safety valve,

* incl. hose holder and tilt range 178°, ** tilt range 180°


Type	Operating weight [t]	Version	Weight [kg]	Price
QC08M-BV160*	7.3 to 10	mechanical	193	9,328 €
QC08Hp-BV160*	7.3 to 10	hydraulic	207	10,912 €
QC08M-BV180*	8.8 to 11	mechanical	244	9,572 €
QC08Hp-BV180*	8.8 to 11	hydraulic	261	11,328 €
QC08M-BV200**	9.8 to 12	mechanical	k. A.	11,272 €
QC08Hp-BV200**	9.8 to 12	hydraulic	k. A.	12,850 €
Installation kit QC08Hp (12V or 24V)				802 €
Additional charge with welded load hook 5 t				262 €

OPERATING WEIGHT 8.8 TO 12 T

TILT COUPLER – QUICKCHANGE/ POWERTILT


OPERATING WEIGHT 7 TO 10 T

Quick coupler QuickChange with hydraulic tilt motor from PowerTilt incl. manifold and oil connection for hydraulic Quick coupler, tilt range 180°



Type	Operating weight [t]	Version	Weight [kg]	Price
QC08M-PT100	7 to 10	mechanical	190	10,828 €
QC08Hp-PT100	7 to 10	hydraulic	198	12,322 €
Installation kit QC08Hp (12V or 24V)				802 €
Additional charge with welded load hook 5 t				262 €

OPERATING WEIGHT 8.8 TO 12 T



COMBI ADAPTER

Type	Weight [kg]	Price
QC03/QC08	42	830 €



WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC08	30	302 €
QC08HT	30	302 €
QC08HT with base plate (460x350x20mm)	54	533 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 5 TO 15 T

Type	Operating weight [t]	Weight [kg]	Price
OQ45/OQ45-5	5 to 12	29	375 €
OQ60/OQ60-5	8 to 15	49	677 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC08	45	781 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC08	57	1,213 €

OPERATING WEIGHT 8.8 TO 12 T

BACKHOE BUCKET CLASS 4S

OPERATING WEIGHT 8.8 TO 12 T

Bottom and side parts 8mm, side cutting edges 15mm, cutting edge HB400 200x25mm, welded tooth system, suitable QC08HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
400	0.150	162	3	1,726 €
600	0.255	201	4	2,004 €
800	0.368	235	4	2,238 €
1000	0.484	274	5	2,427 €

Additional charge with welded front-insert blade 200x20mm per meter, without replacement teeth

234 €

Additional charge as clay bucket or with cutting edge moved forward 150mm

+15 %

Additional charge with 2. bottom or wear stripes per meter

345 €

BACKHOE BUCKET CLASS 4S

OPERATING WEIGHT 8.8 TO 12 T

Bottom and side parts 8mm, side cutting edges 15mm, cutting edge HB400 200x25mm, without teeth, suitable QC08HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
400	0.134	144	1,603 €
600	0.227	177	1,840 €
800	0.327	211	2,074 €
1000	0.428	244	2,222 €

Additional charge as clay bucket or with cutting edge moved forward 150mm

+15 %

Additional charge with 2. bottom or wear stripes per meter

345 €

OPERATING WEIGHT 8.8 TO 12 T



HD-BACKHOE BUCKET CLASS 4S

OPERATING WEIGHT 8.8 TO 12 T

Bottom and side parts HB450 8mm, side cutting edges HB450 15mm, side parts put on bottom, cutting edge HB500 200x25mm, welded tooth system, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
400	0.150	162	3	2,134 €
600	0.255	201	4	2,432 €
800	0.368	235	4	2,640 €
1000	0.484	274	5	2,937 €
Additional charge with welded front-insert blade 200x20mm per meter, without replacement teeth				234 €
Additional charge with cutting edge moved forward 150mm				+15 %
Additional charge with 2. bottom or wear stripes per meter				345 €



HD-BACKHOE BUCKET CLASS 4S

OPERATING WEIGHT 8.8 TO 12 T

Bottom and side parts HB450 8mm, side cutting edges HB450 15mm, side parts put on bottom, cutting edge HB500 200x25mm, without teeth, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
400	0.134	144	2,011 €
600	0.227	177	2,268 €
800	0.327	211	2,476 €
1000	0.428	244	2,732 €
Additional charge with cutting edge moved forward 150mm			+15 %
Additional charge with 2. bottom or wear stripes per meter			345 €

OPERATING WEIGHT 8.8 TO 12 T

DITCH-CLEANING BUCKET RIGID CLASS 3S

OPERATING WEIGHT 6.5 TO 12 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 200x20mm, stiffening sickle, rear cutting edge HB400, suitable QC08HT or OQ45-5



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	0.311	268	2,054 €
1500	0.335	283	2,117 €
1600	0.360	297	2,263 €
1800	0.408	333	2,410 €
2000	0.456	362	2,562 €
Additional charge with screw-on reversible blade 150x20mm per meter			338 €

DITCH-CLEANING BUCKET CLASS 3S WITH CYLINDER


OPERATING WEIGHT 6.5 TO 12 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 200x20mm, stiffening sickle, rear cutting edge HB400, 1 cylinder 2x45°, suitable QC08HT



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	0.311	375	4,398 €
1500	0.335	389	4,421 €
1600	0.360	404	4,445 €
1800	0.408	439	4,492 €
2000	0.456	469	4,539 €
Additional charge with 2. cylinder			757 €
Additional charge with screw-on reversible blade 150x20mm per meter			338 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic			1,686 €

OPERATING WEIGHT 8.8 TO 12 T



DITCH-CLEANING BUCKET CLASS 3S WITH TILT MOTOR

OPERATING WEIGHT 8.8 TO 11 T

Bottom 8mm, side parts HB400 10mm, cutting edge HB400 200x20mm, stiffening sickle, rear cutting edge HB400, tilt range 2x50°, suitable QC08HT

Cutting edge [mm]	Capacity [m³]	Weight with BV160 [kg]	Price with BV160 to 10 t	Weight with BV180 [kg]	Price with BV180 to 11 t
1400	0.308	515	8,242 €	605	8,674 €
1600	0.355	550	8,308 €	630	8,740 €
1800	0.402	590	8,374 €	675	8,811 €
2000	0.449	620	8,455 €	710	8,887 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic					1,686 €



TILT BACKHOE BUCKET CLASS 4S WITH CYLINDER

OPERATING WEIGHT 8.8 TO 12 T

Bottom HB450 10mm, side parts HB450 8mm, side cutting edges HB450 15mm, cutting edge HB500 250x25mm, center pin 60mm, steel bushings inside swivel head, 2 cylinder 2x45°, suitable QC08HT

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1300	0.499	482	5,010 €
1400	0.543	504	5,100 €
1500	0.587	525	5,195 €
1600	0.631	547	5,280 €
Additional charge with 2. bottom or wear stripes per meter			345 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic			1,686 €

OPERATING WEIGHT 8.8 TO 12 T

TILT BACKHOE BUCKET CLASS 4S WITH TILT MOTOR

OPERATING WEIGHT 8.8 TO 11 T

Bottom HB450 10mm, side parts HB450 8mm, side cutting edges HB450 15mm, cutting edge HB500 250x25mm, tilt range 2x50°, suitable QC08HT



Cutting edge [mm]	Capacity [m³]	Weight with BV160 [kg]	Price with BV160 to 10 t	Weight with BV180 [kg]	Price with BV180 to 11 t
1300	0.460	613	9,280 €	648	9,650 €
1400	0.500	635	9,380 €	670	9,754 €
1500	0.540	658	9,488 €	692	9,837 €
1600	0.580	680	9,598 €	715	9,936 €
Additional charge with 2. bottom or wear stripes per meter					345 €
Additional charge with adapter OQ45 or OQ45-5 hydraulic					1,686 €

OPERATING WEIGHT 8.8 TO 12 T



LOADING BUCKET CLASS 4S

OPERATING WEIGHT 8.8 TO 12 T

Bottom HB450 10mm, side parts HB450 8mm, side cutting edges HB450 15mm, cutting edge HB500 250x25mm, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1300	0.499	347	2,643 €
1400	0.543	369	2,742 €
1500	0.587	390	2,846 €
1600	0.631	412	2,940 €

Additional charge with 2. bottom or wear stripes per meter

345 €



TILTROTATOR BUCKET CLASS 4S

OPERATING WEIGHT 8 TO 12 T

Bottom HB450 8mm, side parts 8mm, side cutting edges HB450 15mm, cutting edge HB500 200x20mm, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1200	0.423	217	3,024 €
1400	0.513	249	3,260 €
1600	0.604	282	3,500 €

OPERATING WEIGHT 8.8 TO 12 T

DEMOLITION AND SORTING BUCKET CLASS 4S WITH SKELETON BARS



OPERATING WEIGHT 8.8 TO 12 T

skeleton bars 20mm, bar distance 50mm, side parts 15mm, cutting edge HB500 200x25mm, welded tooth system, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
800	0.368	265	4	2,754 €
900	0.426	300	5	3,071 €
1000	0.484	390	5	3,213 €
1200	0.601	445	6	3,445 €

The bar distance may vary on the outer bars, depending on the cutting edge.

DEMOLITION AND SORTING BUCKET CLASS 4S WITH SKELETON BARS



OPERATING WEIGHT 8.8 TO 12 T

skeleton bars 20mm, bar distance 50mm, side parts 15mm, cutting edge HB500 200x25mm, without teeth, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
800	0.327	241	2,590 €
900	0.377	270	2,866 €
1000	0.428	360	3,008 €
1200	0.530	409	3,199 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 8.8 TO 12 T



DEMOLITION AND SORTING BUCKET CLASS 4S WITH CROSS BARS

OPERATING WEIGHT 8.8 TO 12 T

Cross bars HB500, bar distance 50mm, side parts 15mm, cutting edge HB500 200x25mm, welded tooth system, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
800	0.341	248	4	2,754 €
900	0.394	264	5	3,071 €
1000	0.448	280	5	3,213 €
1200	0.556	311	6	3,445 €



DEMOLITION AND SORTING BUCKET CLASS 4S WITH CROSS BARS

OPERATING WEIGHT 8.8 TO 12 T

Cross bars HB500, bar distance 50mm, side parts 15mm, cutting edge HB500 200x25mm, without teeth, suitable QC08HT or OQ45-5

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
800	0.303	224	2,590 €
900	0.349	234	2,865 €
1000	0.396	250	3,008 €
1200	0.491	275	3,199 €

OPERATING WEIGHT 8.8 TO 12 T

LEVELING BEAM

OPERATING WEIGHT 6.5 TO 12 T

Wear plates made of highly wear-resistant HB450, cutting edge from HB500, with screwed adapter, suitable QC08HT



Width [mm]	Height [mm]	Weight [kg]	Price
1500	160	280	3,003 €
2000	160	318	3,526 €
Additional charge with roller			1,700 €

SPADE BUCKET

OPERATING WEIGHT 6.5 TO 12 T

Bottom and side parts 12mm, cutting edge HB500 200x25mm, suitable double adapter QC08/QC08HT



Cutting edge [mm]	Length [mm]	Weight [kg]	Price
400	1500	225	1,712 €
Additional charge with replaceable blade			175 €

ROOT CUTTER

OPERATING WEIGHT 6.5 TO 12 T

Cutting edge HB450 20mm, suitable QC08HT



Cutting edge [mm]	Height [mm]	Weight [kg]	Price
175	315	73	1,197 €

OPERATING WEIGHT 8.8 TO 12 T



RIPPER TOOTH

OPERATING WEIGHT 8.8 TO 12 T

HB450 leg with changeable tooth tips, ripper tooth J300, suitable QC08HT

Height [mm]	Leg [mm]	Weight [kg]	Price
869	60	188	1,935 €
Special tooth for clearing work			175 €



GRAB RAKE

OPERATING WEIGHT 8.8 TO 12 T

HB450 legs with changeable ripper tooth, leg thickness 40mm, ripper tooth J250, suitable QC08HT

Legs	Width [mm]	Weight [kg]	Price
3	800	204	2,810 €
4	1100	263	3,434 €



EXCAVATOR RAKE

OPERATING WEIGHT 6.5 TO 12 T


HB450 legs, leg thickness 15mm, leg spacing 120mm, suitable QC08HT

Width [mm]	Legs	Weight [kg]	Price
2500	20	235	2,353 €

OPERATING WEIGHT 8.8 TO 12 T

STACKING SYSTEM

FEMII, max. load capacity to 2.5 t, with stand, suitable QC08HT




Fork carrier width [mm]	Fork prongs length [mm]	Weight [kg]	Price
1200	1200	139	2,853 €

When ordering, please specify if you are using the stacking system with a tilt rotator and the type of the tiltrotator.

MOUNTING PLATE

Type	Price with drilling pattern
QC08	955 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 5.3 t

Type	Weight [kg]	Price
QC08	54	1,038 €



OPERATING WEIGHT 12 TO 16 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 12 TO 19 T

Compatible with system Lehnhoff, hydraulic Quick coupler with drop protection

Type	Version	Weight [kg]	Price
QC10M	mechanical	185	4,141 €
QC10HF	hydraulic	200	on request
Installation kit QC10HF (12V or 24V)			802 €
Additional charge with welded load hook 8 t			362 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 12 TO 16 T

Quick coupler QuickChange with hydraulic tilt motor from HKS, tilt range 140°


Type	Operating weight [t]	Version	Weight [kg]	Price
QC10M-BV225	12 to 13	mechanical	345	11,003€
QC10HF-BV225	12 to 13	hydraulic	350	on request
QC10M-BV240	12 to 16	mechanical	345	11,998 €
QC10HF-BV240	12 to 16	hydraulic	350	on request
Installation kit QC10HF (12V or 24V)				802 €
Additional charge with welded load hook 8 t				362 €

OPERATING WEIGHT 12 TO 16 T

TILT COUPLER – QUICKCHANGE/ POWERTILT

OPERATING WEIGHT 12 TO 18 T

Quick coupler QuickChange with hydraulic tilt motor from PowerTilt incl. manifold and oil connection for hydraulic Quick coupler, tilt range 120°




Type	Operating weight [t]	Version	Weight [kg]	Price
QC10M-PT180	12 to 18	mechanical	380	on request
QC10HF-PT180	12 to 18	hydraulic	395	on request
Installation kit QC10HF (12V or 24V)				802 €
Additional charge with welded load hook 8 t				362 €

OPERATING WEIGHT 12 TO 16 T



WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC10	95	989 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 8 TO 15 T

Type	Weight [kg]	Price
OQ60/OQ60-5	49	677 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC10	150	1,853 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC10	174	2,797 €

OPERATING WEIGHT 12 TO 16 T

BACKHOE BUCKET SW-VERSION CLASS 5

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 10mm, side parts 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, side wear plates HB450 10mm, side parts put on bottom, welded tooth system
Cat J300 or ESCO U25, suitable QC10 or OQ60



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U25
400	0.213	301	3	3,452 €	3,652 €
600	0.369	358	3	3,619 €	3,819 €
800	0.536	427	4	3,953 €	4,220 €
900	0.622	455	4	4,084 €	4,350 €
1000	0.710	484	4	4,193 €	4,460 €
1200	0.888	553	5	4,675 €	5,008 €

Additional charge with welded front-insert blade 250x25mm per meter, without replacement teeth

338 €

Additional charge with 2. bottom or wear stripes per meter

377 €

Additional charge with OQ65 adapter

190 €

Additional charge with OQ70 adapter

377 €

Additional charge with OQ70/55 adapter

428 €

OPERATING WEIGHT 12 TO 16 T



BACKHOE BUCKET SW-VERSION CLASS 5

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 10mm, side parts 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, side wear plates HB450 10mm, side parts put on bottom, without teeth, suitable QC10 or OQ60


Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
400	0.224	281	3,264 €
600	0.388	341	3,430 €
800	0.564	401	3,702 €
900	0.655	431	3,833 €
1000	0.748	461	3,942 €
1200	0.935	522	4,361 €
Additional charge with 2. bottom or wear stripes per meter			377 €
Additional charge with OQ65 adapter			190 €
Additional charge with OQ70 adapter			377 €
Additional charge with OQ70/55 adapter			428 €

OPERATING WEIGHT 12 TO 16 T

BACKHOE BUCKET LH-VERSION CLASS 5

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 10mm, side parts 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, side wear plates HB450 10mm, side parts put on bottom, welded tooth system Cat J300 or ESCO U25, suitable SW33 or CW20



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U25
400	0.213	307	3	3,452 €	3,652 €
600	0.366	360	3	3,619 €	3,819 €
800	0.529	425	4	3,953 €	4,220 €
900	0.613	452	4	4,084 €	4,350 €
1000	0.698	478	4	4,193 €	4,460 €
1200	0.871	543	5	4,675 €	5,008 €
Additional charge with welded front-insert blade 250x25mm per meter, without replacement teeth					338 €
Additional charge with 2. bottom or wear stripes per meter					377 €
Additional charge with Likufix SW33 adapter					968 €

OPERATING WEIGHT 12 TO 16 T



BACKHOE BUCKET LH-VERSION CLASS 5

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 10mm, side parts 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, side wear plates HB450 10mm, side parts put on bottom, without teeth, suitable SW33 or CW20

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
400	0.224	275	3,264 €
600	0.385	331	3,430 €
800	0.557	387	3,702 €
900	0.645	415	3,833 €
1000	0.735	443	3,942 €
1200	0.917	499	4,361 €
Additional charge with 2. bottom or wear stripes per meter			377 €
Additional charge with Likufix SW33 adapter			968 €

OPERATING WEIGHT 12 TO 16 T

DITCH-CLEANING BUCKET RIGID CLASS 4

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 8mm, side parts HB450 10mm, cutting edge HB500 200x25mm, stiffening sickle, rear cutting edge HB500, suitable QC10 or OQ60



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1600	0.461	417	3,457 €
1800	0.523	442	3,788 €
2000	0.585	494	4,013 €
2200	0.647	527	4,209 €
Additional charge with screw-on reversible blade 200x20mm per meter			408 €
Additional charge with OQ65 adapter			190 €
Additional charge with OQ70 adapter			377 €
Additional charge with OQ70/55 adapter			428 €

DITCH-CLEANING BUCKET CLASS 4 WITH CYLINDER


OPERATING WEIGHT 12 TO 16 T

Bottom HB450 8mm, side parts HB450 10mm, cutting edge HB500 200x25mm, stiffening sickle, rear cutting edge HB500, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC10



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1600	0.461	568	6,760 €
1800	0.523	611	7,000 €
2000	0.585	645	7,150 €
2200	0.647	679	7,350 €
Additional charge with screw-on reversible blade 200x20mm per meter			408 €
Additional charge with OQ60/OQ60-5 hydraulic adapter			2,030 €

OPERATING WEIGHT 12 TO 16 T




DITCH-CLEANING BUCKET CLASS 4 WITH TILT MOTOR

OPERATING WEIGHT 12 TO 13 T

Bottom HB450 8mm, side parts HB450 10mm, cutting edge HB500 200x25mm, stiffening sickle, rear cutting edge HB500, tilt range 2x50°, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV225
1600	0.460	790	9,643 €
1800	0.515	850	9,846 €
2000	0.575	890	10.150 €
2200	0.635	930	10.252 €
Additional charge with OQ60/OQ60-5 hydraulic adapter			2,030 €
Additional charge with GPS/sensor preparation with V90 plug			1,800 €
Additional charge with GPS/sensor preparation with 3/4" plug			1,630 €
Additional charge with manual throttle valve			120 €



DITCH-CLEANING BUCKET CLASS 4S WITH TILT MOTOR

OPERATING WEIGHT 13 TO 16 T

Bottom HB450 10mm, side parts HB450 15mm, cutting edge HB500 200x25mm, stiffening sickle, rear cutting edge HB500, tilt range 2x50°, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV240
1600	0.510	900	10.709 €
1800	0.580	930	11,034 €
2000	0.650	960	11,297 €
2200	0.720	990	11,521 €
Additional charge with OQ60/OQ60-5 hydraulic adapter			2,030 €
Additional charge with GPS/sensor preparation with V90 plug			1,800 €
Additional charge with GPS/sensor preparation with 3/4" plug			1,630 €
Additional charge with manual throttle valve			120 €

OPERATING WEIGHT 12 TO 16 T

SLOPE BUCKET CLASS 5 WITH CYLINDER

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 8mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 200x25mm, rear cutting edge HB500, with wear stripes lengthwise HB450 and crosswise HB500, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1700	0.634	573	8,666 €
1800	0.676	597	8,791 €
1900	0.717	621	8,927 €
2000	0.759	646	9,062 €
Additional charge with screw-on reversible blade 200x20mm per meter			408 €
Additional charge with profile blade type 151 per meter			154 €
Additional charge with OQ60/OQ60-5 hydraulic adapter			2,030 €




SLOPE BUCKET CLASS 5 WITH TILT MOTOR

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 8mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 200x25mm, rear cutting edge HB500, with wear stripes lengthwise HB450 and crosswise HB500, tilt range 2x50°, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight with BV225 [kg]	Price with BV225 to 13 t	Weight with BV240 [kg]	Price with BV240 to 16 t
1800	0.640	830	12,068 €	k. A.	12,381 €
1900	0.680	855	12,381 €	k. A.	12,693 €
2000	0.720	880	12,693 €	k. A.	12,901 €
Additional charge with screw-on reversible blade 200x20mm per meter					408 €
Additional charge with profile blade type 151 per meter					154 €
Additional charge with OQ60/OQ60-5 hydraulic adapter					2,030 €
Additional charge with GPS/sensor preparation with V90 plug					1,800 €
Additional charge with GPS/sensor preparation with 3/4" plug					1,630 €
Additional charge with manual throttle valve					120 €



OPERATING WEIGHT 12 TO 16 T



TILT BACKHOE BUCKET CLASS 5 WITH CYLINDER

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 10mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, center pin 80mm, steel bushings inside swivel head, 2 cylinder with piston rod protection 2x45°, incl. lock valve, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	0.688	756	8,265 €
1500	0.745	782	8,380 €
1600	0.802	807	8,480 €
Additional charge with 2. bottom or wear stripes per meter			377 €
Additional charge with OQ60/OQ60-5 hydraulic adapter			2,030 €



TILT BACKHOE BUCKET CLASS 5 WITH TILT MOTOR

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 10mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, tilt range 2x50°, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight with BV225 [kg]	Price with BV225 to 13 t	Weight with BV240 [kg]	Price with BV240 to 16 t
1400	0.635	820	10.716 €	830	11,236 €
1500	0.688	855	10.820 €	865	11,341 €
1600	0.740	890	10.924 €	900	11,601 €
Additional charge with 2. bottom or wear stripes per meter					377 €
Additional charge with OQ60/OQ60-5 hydraulic adapter					2,030 €
Additional charge with GPS/sensor preparation with V90 plug					1,800 €
Additional charge with GPS/sensor preparation with 3/4" plug					1,630 €
Additional charge with manual throttle valve					120 €

OPERATING WEIGHT 12 TO 16 T

LOADING BUCKET CLASS 5

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 10mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, suitable QC10 or OQ60



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1300	0.631	415	4,952 €
1400	0.688	441	5,025 €
1500	0.745	467	5,098 €
1600	0.802	492	5,171 €
Additional charge with 2. bottom or wear stripes per meter			377 €
Additional charge with OQ65 adapter			190 €
Additional charge with OQ70 adapter			377 €
Additional charge with OQ70/55 adapter			428 €

TILTROTATOR BUCKET CLASS 5

OPERATING WEIGHT 11 TO 16 T

Bottom HB450 8mm, side parts 8mm, side cutting edges HB450 15mm, cutting edge HB500 250x25mm, suitable QC10 or OQ60



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1200	0.453	285	4,587 €
1400	0.552	324	4,719 €
1600	0.650	362	4,850 €
Additional charge with OQ65 adapter			190 €
Additional charge with OQ70 adapter			377 €
Additional charge with OQ70/55 adapter			428 €

OPERATING WEIGHT 12 TO 16 T



DEMOLITION AND SORTING BUCKET CLASS 5 WITH SKELETON BARS SW-VERSION

OPERATING WEIGHT 12 TO 16 T

Skeleton bars HB450 20mm, bar distance 60mm, side parts HB450 20mm, cutting edge HB500 250x30mm, welded tooth system Cat J300 or ESCO U25, suitable QC10 or OQ60

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U25
800	0.536	570	4	5,416 €	5,675 €
1000	0.710	650	4	5,884 €	6,139 €
1200	0.888	740	5	6,565 €	6,883 €
Additional charge with OQ65 adapter					190 €
Additional charge with OQ70 adapter					377 €
Additional charge with OQ70/55 adapter					428 €

The bar distance may vary on the outer bars, depending on the cutting edge.



DEMOLITION AND SORTING BUCKET CLASS 5 WITH SKELETON BARS LH-VERSION

OPERATING WEIGHT 12 TO 16 T

Skeleton bars HB450 20mm, bar distance 60mm, side parts HB450 20mm, cutting edge HB500 250x30mm, welded tooth system Cat J300 or ESCO U25, suitable SW33 or CW20

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U25
800	0.529	590	4	5,416 €	5,675 €
1000	0.698	660	4	5,884 €	6,139 €
1200	0.871	740	5	6,565 €	6,883 €
Additional charge with Likufix SW33 adapter					968 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 12 TO 16 T

DEMOLITION AND SORTING BUCKET CLASS 5 WITH CROSS BARS SW-VERSION

OPERATING WEIGHT 12 TO 16 T

Cross bars HB500, bar distance 60mm, side parts HB450 20mm, cutting edge HB500 250x30mm, welded tooth system Cat J300 or ESCO U25, suitable QC10 or OQ60



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U25
800	0.536	460	4	5,613 €	5,806 €
1000	0.710	510	4	6,009 €	6,201 €
1200	0.888	575	5	6,680 €	6,934 €
Additional charge with OQ65 adapter					190 €
Additional charge with OQ70 adapter					377 €
Additional charge with OQ70/55 adapter					428 €

DEMOLITION AND SORTING BUCKET CLASS 5 WITH CROSS BARS LH-VERSION

OPERATING WEIGHT 12 TO 16 T

Cross bars HB500, bar distance 60mm, side parts HB450 20mm, cutting edge HB500 250x30mm, welded tooth system Cat J300 or ESCO U25, suitable SW33 or CW20



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U25
800	0.529	535	4	5,613 €	5,806 €
1000	0.698	585	4	6,009 €	6,201 €
1200	0.871	650	5	6,680 €	6,934 €
Additional charge with Likufix SW33 adapter					968 €

OPERATING WEIGHT 12 TO 16 T




VHD-BACKHOE BUCKET SW-VERSION CLASS 5

OPERATING WEIGHT 12 TO 16 T

Bottom and side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x35mm, side wear plates HB450, wear stripes crosswise HB500 80x10mm, welded tooth system ESCO U30, suitable QC10 or OQ60

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
600	0.369	430	3	4,592 €
800	0.536	512	4	5,106 €
1000	0.710	581	4	5,444 €
1200	0.888	664	5	5,936 €
Additional charge with OQ65 adapter				190 €
Additional charge with OQ70 adapter				377 €
Additional charge with OQ70/55 adapter				428 €



VHD-BACKHOE BUCKET LH-VERSION CLASS 5

OPERATING WEIGHT 12 TO 16 T

Bottom and side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x35mm, side wear plates HB450, wear stripes crosswise HB500 80x10mm, welded tooth system ESCO U30, suitable SW33 or CW20

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
600	0.366	432	3	4,592 €
800	0.529	510	4	5,106 €
1000	0.698	574	4	5,444 €
1200	0.871	652	5	5,936 €
Additional charge with Likufix SW33 adapter				968 €

OPERATING WEIGHT 12 TO 16 T

ROCK BACKHOE BUCKET CLASS 5

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 8mm, side parts HB450 8mm, side cutting edges HB450 20mm, side part reinforcement HB450 15mm, cutting edge HB500 250x30mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J300 or ESCO U25, suitable QC10 or OQ60



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U25
800	0.466	485	4	4,761 €	5,058 €
1000	0.625	552	4	5,128 €	5,365 €
1200	0.786	631	5	5,693 €	5,988 €
Additional charge with OQ65 adapter				190 €	
Additional charge with OQ70 adapter				377 €	
Additional charge with OQ70/55 adapter				428 €	

STONE LAYING BUCKET CLASS 5

OPERATING WEIGHT 12 TO 16 T

Bottom HB450 10mm, side parts HB450 25mm, cutting edge HB500 300x35mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J300 or ESCO U30, suitable QC10 or OQ60



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U30
1000	0.678	655	4	5,389 €	5,884 €
1100	0.770	694	4	5,660 €	6,149 €
1200	0.862	737	5	5,998 €	6,612 €
1300	0.954	777	5	6,342 €	6,961 €
Additional charge with OQ65 adapter				190 €	
Additional charge with OQ70 adapter				377 €	
Additional charge with OQ70/55 adapter				428 €	

OPERATING WEIGHT 12 TO 16 T



LEVELING BEAM

OPERATING WEIGHT 12 TO 21 T

Wear plates made of highly wear-resistant HB450, cutting edge from HB500, with screwed adapter, suitable QC10

Width [mm]	Height [mm]	Weight [kg]	Price
2000	240	670	5,248 €
2500	240	740	5,597 €
Additional charge with roller			1,980 €



ROOT CUTTER

OPERATING WEIGHT 12 TO 21 T

Cutting edge HB450 25mm, suitable QC10 or OQ60

Cutting edge [mm]	Height [mm]	Weight [kg]	Price
225	480	130	1,967 €
Additional charge with OQ65 adapter			190 €
Additional charge with OQ70 adapter			377 €
Additional charge with OQ70/55 adapter			428 €



RIPPER TOOTH

OPERATING WEIGHT 12 TO 16 T

HB450 leg with changeable tooth tips, ripper tooth J350, suitable QC10 or OQ60

Height [mm]	Leg [mm]	Weight [kg]	Price
1002	70	330	3,704 €
Special tooth for clearing work			222 €
Additional charge with OQ65 adapter			190 €
Additional charge with OQ70 adapter			377 €
Additional charge with OQ70/55 adapter			428 €

OPERATING WEIGHT 12 TO 16 T

GRAB RAKE

OPERATING WEIGHT 12 TO 16 T

HB450 legs with changeable ripper tooth, leg thickness 40mm, ripper tooth J300, suitable QC10 or OQ60

Legs	Width [mm]	Weight [kg]	Price
3	1000	320	5,723 €
4	1200	460	7,127 €
Additional charge with OQ65 adapter			190 €
Additional charge with OQ70 adapter			377 €
Additional charge with OQ70/55 adapter			428 €




STACKING SYSTEM

FEMIII, max. load capacity to 4 t, with stand, suitable QC10 or OQ60


Fork carrier width [mm]	Fork prongs length [mm]	Weight [kg]	Price
1200	1200	309	4,050 €
1500	1200	340	4,223 €
Additional charge with OQ65 adapter			190 €

When ordering, please specify if you are using the stacking system with a tilt rotator and the type of the tiltrotator.



MOUNTING PLATE

Type	Price with drilling pattern
QC10	2,331 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 12.5 t

Type	Weight [kg]	Price
QC10	120	2,295 €



OPERATING WEIGHT 16 TO 21 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 12 TO 19 T

Compatible with system Lehnhoff, hydraulic Quick coupler with drop protection

Type	Version	Weight [kg]	Price
QC10M	mechanical	185	4,141 €
QC10HF	hydraulic	200	on request
Installation kit QC10HF (12V or 24V)			802 €
Additional charge with welded load hook 8 t			362 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 15 TO 19 T

Quick coupler QuickChange with hydraulic tilt motor from HKS, tilt range 140°


Type	Operating weight [t]	Version	Weight [kg]	Price
QC10M-BV250	15 to 19	mechanical	405	12,536 €
QC10HF-BV250	15 to 19	hydraulic	410	on request
Installation kit QC10HF (12V or 24V)				802 €
Additional charge with welded load hook 8 t				362 €

OPERATING WEIGHT 16 TO 21 T

TILT COUPLER – QUICKCHANGE/ POWERTILT

OPERATING WEIGHT 12 TO 18 T

Quick coupler QuickChange with hydraulic tilt motor from PowerTilt incl. manifold and oil connection for hydraulic Quick coupler, tilt range 120°



Type	Operating weight [t]	Version	Weight [kg]	Price
QC10M-PT180	12 to 18	mechanical	380	on request
QC10HF-PT180	12 to 18	hydraulic	395	on request
Installation kit QC10HF (12V or 24V)				802 €
Additional charge with welded load hook 8 t				362 €

OPERATING WEIGHT 16 TO 21 T



WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC10	95	989 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 14 TO 22 T

Type	Weight [kg]	Price
OQ65	70	822 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC10	150	1,853 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC10	174	2,797 €

OPERATING WEIGHT 16 TO 21 T

BACKHOE BUCKET SW-VERSION CLASS 5S

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10mm, side parts 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, side wear plates HB450 10mm, side parts put on bottom, welded tooth system Cat J300 or ESCO U30, suitable QC10 or OQ65



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U30
600	0.406	379	3	3,843 €	4,241 €
800	0.589	451	4	4,180 €	4,710 €
1000	0.781	510	4	4,432 €	4,963 €
1200	0.977	582	5	5,021 €	5,684 €
1400	1.175	653	6	5,546 €	6,342 €

Additional charge with welded front-insert blade 250x25mm per meter, without replacement teeth

338 €

Additional charge with 2. bottom or wear stripes per meter

377 €

Additional charge with OQ70 adapter

188 €

Additional charge with OQ70/55 adapter

238 €

OPERATING WEIGHT 16 TO 21 T



BACKHOE BUCKET SW-VERSION CLASS 55

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10mm, side parts 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, side wear plates HB450 10mm, side parts put on bottom, without teeth, suitable QC10 or OQ65


Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.427	359	3,655 €
800	0.620	422	3,928 €
1000	0.822	484	4,181 €
1200	1.029	547	4,707 €
1400	1.237	609	5,169 €
Additional charge with 2. bottom or wear stripes per meter			377 €
Additional charge with OQ70 adapter			188 €
Additional charge with OQ70/55 adapter			238 €

OPERATING WEIGHT 16 TO 21 T

BACKHOE BUCKET LH-VERSION CLASS 55

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10mm, side parts 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, side wear plates HB450 10mm, side parts put on bottom, welded tooth system Cat J300 or ESCO U30, suitable SW48 or CW30



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U30
600	0.421	385	3	3,843 €	4,241 €
800	0.608	454	4	4,180 €	4,710 €
1000	0.804	510	4	4,432 €	4,963 €
1200	1.004	579	5	5,021 €	5,684 €
1400	1.204	648	6	5,546 €	6,342 €
Additional charge with welded front-insert blade 250x25mm per meter, without replacement teeth					338 €
Additional charge with 2. bottom or wear stripes per meter					377 €
Additional charge with Likufix SW48 adapter					1,093 €

BACKHOE BUCKET LH-VERSION CLASS 55

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10mm, side parts 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, side wear plates HB450 10mm, side parts put on bottom, without teeth, suitable SW48 or CW30



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.443	362	3,655 €
800	0.640	422	3,928 €
1000	0.846	482	4,181 €
1200	1.056	542	4,707 €
1400	1.268	602	5,169 €
Additional charge with 2. bottom or wear stripes per meter			377 €
Additional charge with Likufix SW48 adapter			1,093 €

OPERATING WEIGHT 16 TO 21 T



DITCH-CLEANING BUCKET RIGID CLASS 5

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10mm, side parts HB450 15mm, cutting edge HB500 250x25mm, stiffening sickle, rear cutting edge HB500, suitable QC10 or OQ65

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1800	0.642	604	4,294 €
2000	0.720	649	4,568 €
2200	0.798	694	4,862 €
2400	0.876	739	5,268 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with OQ70 adapter			188 €
Additional charge with OQ70/55 adapter			238 €



DITCH-CLEANING BUCKET CLASS 5 WITH CYLINDER

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10mm, side parts HB450 15mm, cutting edge HB500 250x25mm, stiffening sickle, rear cutting edge HB500, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1800	0.642	795	7,730 €
2000	0.720	840	8,070 €
2200	0.798	885	8,290 €
2400	0.876	930	8,480 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with OQ65 hydraulic adapter			2,716 €


OPERATING WEIGHT 16 TO 21 T

DITCH-CLEANING BUCKET CLASS 5 WITH TILT MOTOR

OPERATING WEIGHT 15 TO 21 T

Bottom HB450 10mm, side parts HB450 15mm, cutting edge HB500 250x25mm, stiffening sickle, rear cutting edge HB500, tilt range 2x50°, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV250
1800	0.635	1010	11,115 €
2000	0.710	1050	11,744 €
2200	0.785	1100	11,937 €
2400	0.860	1140	12,140 €
Additional charge with OQ65 hydraulic adapter			2,716 €
Additional charge with GPS/sensor preparation with V90 plug			1,800 €
Additional charge with GPS/sensor preparation with 3/4" plug			1,630 €
Additional charge with manual throttle valve			120 €



SLOPE BUCKET CLASS 5S WITH CYLINDER

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 200x25mm, rear cutting edge HB500, with wear stripes lengthwise HB450 and crosswise HB500, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1700	0.837	655	9,187 €
1800	0.892	680	9,385 €
1900	0.948	705	9,686 €
2000	1.004	730	9,894 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with profile blade type 151 per meter			154 €
Additional charge with OQ65 hydraulic adapter			2,716 €



OPERATING WEIGHT 16 TO 21 T



SLOPE BUCKET CLASS 5S WITH TILT MOTOR

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 200x25mm, rear cutting edge HB500, with wear stripes lengthwise HB450 and crosswise HB500, tilt range 2x50°, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV250
1800	0.856	1100	13,629 €
1900	0.900	1130	13,941 €
2000	0.960	1150	14,149 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with profile blade type 151 per meter			154 €
Additional charge with OQ65 hydraulic adapter			2,716 €
Additional charge with GPS/sensor preparation with V90 plug			1,800 €
Additional charge with GPS/sensor preparation with 3/4" plug			1,630 €
Additional charge with manual throttle valve			120 €



TILT BACKHOE BUCKET CLASS 5S WITH CYLINDER

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10 mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 300x30mm, center pin 80mm, steel bushings inside swivel head, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC10

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1300	0.802	760	8,755 €
1400	0.877	784	8,890 €
1500	0.951	808	9,020 €
1600	1.025	832	9,160 €
Additional charge with 2. bottom or wear stripes per meter			377 €
Additional charge with OQ65 hydraulic adapter			2,716 €

OPERATING WEIGHT 16 TO 21 T

TILT BACKHOE BUCKET CLASS 5S WITH TILT MOTOR

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 300x30mm, tilt range 2x50°, suitable QC10



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV250
1300	0.745	1150	12,068 €
1400	0.810	1190	12,173 €
1500	0.875	1230	12,329 €
1600	0.940	1270	12,433 €
Additional charge with 2. bottom or wear stripes per meter			377 €
Additional charge with OQ65 hydraulic adapter			2,716 €
Additional charge with GPS/sensor preparation with V90 plug			1,800 €
Additional charge with GPS/sensor preparation with 3/4" plug			1,630 €
Additional charge with manual throttle valve			120 €

LOADING BUCKET CLASS 5S

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10 mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 300x30mm, suitable QC10 or OQ65



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1300	0.802	430	5,370 €
1400	0.877	454	5,458 €
1500	0.951	478	5,545 €
1600	1.025	502	5,633 €
Additional charge with 2. bottom or wear stripes per meter			377 €
Additional charge with OQ70 adapter			188 €
Additional charge with OQ70/55 adapter			238 €

OPERATING WEIGHT 16 TO 21 T



TILTROTATOR BUCKET CLASS 55

OPERATING WEIGHT 14 TO 19 T

Bottom HB450 10mm, side parts 8mm, side cutting edges HB450 20mm, cutting edge HB500 250x25mm, suitable QC10 or OQ65

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	0.635	393	4,934 €
1600	0.750	443	5,080 €
1800	0.865	493	5,227 €
Additional charge with OQ70 adapter			188 €
Additional charge with OQ70/55 adapter			238 €



TILTROTATOR BUCKET CLASS 6

OPERATING WEIGHT 18 TO 22 T

Bottom HB450 10mm, side parts 10mm, side cutting edges HB450 20mm, cutting edge HB500 250x30mm, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	0.703	481	5,561 €
1600	0.834	539	5,750 €
1800	0.965	595	5,938 €
Additional charge with OQ80 adapter			375 €

OPERATING WEIGHT 16 TO 21 T

DEMOLITION AND SORTING BUCKET CLASS 55 WITH SKELETON BARS SW-VERSION



OPERATING WEIGHT 16 TO 21 T

Skeleton bars HB450 20mm, bar distance 60mm, side parts HB450 20mm, cutting edge HB500 250x30mm, welded tooth system
Cat J300 or ESCO U30, suitable QC10 or OQ65

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U30
800	0.589	660	4	5,946 €	6,467 €
1000	0.781	740	4	6,462 €	6,981 €
1200	0.977	880	5	7,226 €	7,876 €
1400	1.175	950	6	8,069 €	8,849 €
Additional charge with OQ70 adapter					188 €
Additional charge with OQ70/55 adapter					238 €

The bar distance may vary on the outer bars, depending on the cutting edge.

DEMOLITION AND SORTING BUCKET CLASS 55 WITH SKELETON BARS LH-VERSION




OPERATING WEIGHT 16 TO 21 T

Skeleton bars HB450 20mm, bar distance 60mm, side parts HB450 20mm, cutting edge HB500 250x30mm, welded tooth system
Cat J300 or ESCO U30, suitable SW48 or CW30

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U30
800	0.608	650	4	5,946 €	6,467 €
1000	0.804	730	4	6,462 €	6,981 €
1200	1.004	820	5	7,226 €	7,876 €
1400	1.204	910	6	8,069 €	8,849 €
Additional charge with Likufix SW48 adapter					1,093 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 16 TO 21 T



DEMOLITION AND SORTING BUCKET CLASS 55 WITH CROSS BARS SW-VERSION

OPERATING WEIGHT 16 TO 21 T

Cross bars HB500, bar distance 60mm, side parts HB450 20mm, cutting edge HB500 250x30mm, welded tooth system Cat J300 or ESCO U30, suitable QC10 or OQ65

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U30
800	0.589	565	4	6,071 €	6,592 €
1000	0.781	620	4	6,482 €	7,002 €
1200	0.977	685	5	7,205 €	7,856 €
1400	1.175	750	6	7,808 €	8,588 €
Additional charge with OQ70 adapter					188 €
Additional charge with OQ70/55 adapter					238 €



DEMOLITION AND SORTING BUCKET CLASS 55 WITH CROSS BARS LH-VERSION

OPERATING WEIGHT 16 TO 21 T

Cross bars HB500, bar distance 60mm, side parts HB450 20mm, cutting edge HB500 250x30mm, welded tooth system Cat J300 or ESCO U30, suitable SW48 or CW30

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U30
800	0.608	640	4	6,071 €	6,592 €
1000	0.804	695	4	6,482 €	7,002 €
1200	1.004	760	5	7,205 €	7,856 €
1400	1.204	825	6	7,808 €	8,588 €
Additional charge with Likufix SW48 adapter					1,093 €

OPERATING WEIGHT 16 TO 21 T

VHD-BACKHOE BUCKET SW-VERSION CLASS 55

OPERATING WEIGHT 16 TO 21 T

Bottom and side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x35mm, side wear plates HB450, wear stripes crosswise HB500 80x10mm, welded tooth system ESCO U30, suitable QC10 or OQ65




Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
600	0.406	455	3	5,153 €
800	0.589	541	4	5,718 €
1000	0.781	612	4	6,084 €
1200	0.977	698	5	6,659 €
1400	1.175	784	6	7,362 €
Additional charge with OQ70 adapter				188 €
Additional charge with OQ70/55 adapter				238 €

VHD-BACKHOE BUCKET LH-VERSION CLASS 55

OPERATING WEIGHT 16 TO 21 T

Bottom and side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x35mm, side wear plates HB450, wear stripes crosswise HB500 80x10mm, welded tooth system ESCO U30, suitable SW48 or CW30



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
600	0.421	462	3	5,153 €
800	0.608	545	4	5,718 €
1000	0.804	612	4	6,084 €
1200	1.004	695	5	6,659 €
1400	1.204	778	6	7,362 €
Additional charge with Likufix SW48 adapter				1,093 €

OPERATING WEIGHT 16 TO 21 T



ROCK BACKHOE BUCKET CLASS 55

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 8mm, side parts HB450 8mm, side cutting edges HB450 20mm, side part reinforcement HB450 15mm, cutting edge HB500 250x30mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J300 or ESCO U30, suitable QC10 or OQ65

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U30
800	0.482	540	4	4,958 €	5,489 €
1000	0.646	608	4	5,376 €	5,865 €
1200	0.811	687	5	5,955 €	6,566 €
1300	0.894	733	6	6,278 €	7,011 €
Additional charge with OQ70 adapter					188 €
Additional charge with OQ70/55 adapter					238 €



RIPPING BUCKET CLASS 55

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 12mm, side parts HB450 12mm, side cutting edges HB450 35mm, side part reinforcement HB450 25mm, cutting edge HB500 400x50mm, with wear stripes crosswise HB500, welded tooth system ESCO U40, suitable QC10* or OQ65

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
700	0.315	739	3	6,886 €
Additional charge with OQ70 adapter				188 €
Additional charge with OQ70/55 adapter				238 €

*The cutting widths may vary slightly for marked or other adapters in order to ensure the best possible technical design.

OPERATING WEIGHT 16 TO 21 T

STONE LAYING BUCKET CLASS 55

OPERATING WEIGHT 16 TO 21 T

Bottom HB450 10mm, side parts HB450 25mm, cutting edge HB500 300x35mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J300 or ESCO U30, suitable QC10 or OQ65



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J300	Price with ESCO U30
1000	0.820	829	4	6,467 €	6,981 €
1100	0.933	877	4	6,758 €	7,272 €
1200	1,047	931	5	7,132 €	7,773 €
1300	1.161	980	5	7,424 €	8,064 €
Additional charge with OQ70 adapter					188 €
Additional charge with OQ70/55 adapter					238 €

LEVELING BEAM

OPERATING WEIGHT 12 TO 21 T

Wear plates made of highly wear-resistant HB450, cutting edge from HB500, with screwed adapter, suitable QC10



Width [mm]	Height [mm]	Weight [kg]	Price
2000	240	670	5,248 €
2500	240	740	5,597 €
Additional charge with roller			1,980 €

ROOT CUTTER

OPERATING WEIGHT 12 TO 21 T

Cutting edge HB450 25mm, suitable QC10 or OQ65



Cutting edge [mm]	Height [mm]	Weight [kg]	Price
225	480	130	2,157 €
Additional charge with OQ70 adapter			188 €
Additional charge with OQ70/55 adapter			238 €

OPERATING WEIGHT 16 TO 21 T



RIPPER TOOTH

OPERATING WEIGHT 16 TO 26 T

Leg with changeable tooth tips and leg protection HB450, ripper tooth Cat 6J8812/9W245, suitable QC10 or OQ65

Height [mm]	Leg [mm]	Weight [kg]	Price
1047	80	460	4,370 €
Additional charge with OQ70 adapter			188 €
Additional charge with OQ70/55 adapter			238 €




GRAB RAKE

OPERATING WEIGHT 16 TO 26 T

HB450 legs with changeable ripper tooth, leg thickness 50mm, ripper tooth J300, suitable QC10 or OQ65

Legs	Width [mm]	Weight [kg]	Price
3	1200	430	7,127 €
4	1500	690	8,864 €
Additional charge with OQ70 adapter			188 €
Additional charge with OQ70/55 adapter			238 €



STACKING SYSTEM

FEMIII, max. load capacity to 4 t, with stand, suitable QC10 or OQ65


Fork carrier width [mm]	Fork prongs length [mm]	Weight [kg]	Price
1200	1200	309	4,240 €
1500	1200	340	4,413 €
Additional charge with OQ70/55 adapter			238 €

When ordering, please specify if you are using the stacking system with a tilt rotator and the type of the tiltrotator.

OPERATING WEIGHT 16 TO 21 T

MOUNTING PLATE

Type	Price with drilling pattern
QC10	2,331 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 12.5 t

Type	Weight [kg]	Price
QC10	120	2,295 €



OPERATING WEIGHT 21 TO 26 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 19 TO 40 T

Compatible with system Lehnhoff, hydraulic Quick coupler with drop protection

Type	Version	Operating weight [t]	Weight [kg]	Price
QC21M/25M	mechanical	to 40	320	6,503 €
QC21HF	hydraulic	to 28	270	on request
Installation kit QC21HF (12V or 24V)				802 €
Additional charge with welded load hook 10 t				415 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 19 TO 26 T

Quick coupler QuickChange with hydraulic tilt motor from HKS, tilt range 140°

Type	Operating weight [t]	Version	Weight [kg]	Price
QC21M/25M-BV250	19 to 23	mechanical	550	14,413 €
QC21HF-BV250	19 to 23	hydraulic	560	on request
QC21M/25M-BV260	22 to 26	mechanical	620	17,387 €
QC21HF-BV260	22 to 26	hydraulic	630	on request
Installation kit QC21HF (12V or 24V)				802 €
Additional charge with welded load hook 10 t				415 €

OPERATING WEIGHT 21 TO 26 T

WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC21/25	140	1,197 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 18 TO 32 T

Type	Weight [kg]	Price
OQ70/55	95	1,030 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC21/25	220	2,331 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC21/25	290	3,357 €



OPERATING WEIGHT 21 TO 26 T



BACKHOE BUCKET SW-VERSION CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 12mm, side parts 8mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, side wear plates HB450 12mm, side parts put on bottom, welded tooth system
Cat J350 or ESCO U35, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
600	0.446	502	3	4,815 €	4,955 €
800	0.652	597	4	5,100 €	5,287 €
1000	0.868	677	4	5,388 €	5,575 €
1200	1.090	773	5	5,987 €	6,221 €
1400	1.316	853	5	6,496 €	6,730 €
Additional charge with welded front-insert blade 300x30mm per meter, without replacement teeth					466 €
Additional charge with 2. bottom or wear stripes per meter					461 €
Additional charge with OQ80 adapter					375 €



BACKHOE BUCKET SW-VERSION CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 12mm, side parts 8mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, side wear plates HB450 12mm, side parts put on bottom, without teeth, suitable QC21/25 or OQ70/55


Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.470	477	4,446 €
800	0.686	561	4,608 €
1000	0.914	645	4,896 €
1200	1.148	730	5,373 €
1400	1.385	814	5,882 €
Additional charge with 2. bottom or wear stripes per meter			461 €
Additional charge with OQ80 adapter			375 €

OPERATING WEIGHT 21 TO 26 T

BACKHOE BUCKET LH-VERSION CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 12mm, side parts 8mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, side wear plates HB450 12mm, side parts put on bottom, welded tooth system Cat J350 or ESCO U35, suitable SW48 or CW40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
600	0.463	533	3	4,815 €	4,955 €
800	0.676	627	4	5,100 €	5,287 €
1000	0.898	705	4	5,388 €	5,575 €
1200	1.127	799	5	5,987 €	6,221 €
1400	1.359	877	5	6,496 €	6,730 €
Additional charge with welded front-insert blade 300x30mm per meter, without replacement teeth					466 €
Additional charge with 2. bottom or wear stripes per meter					461 €
Additional charge with Likufix SW48 adapter					1,093 €

BACKHOE BUCKET LH-VERSION CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 12mm, side parts 8mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, side wear plates HB450 12mm, side parts put on bottom, without teeth, suitable SW48 or CW40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
600	0.488	501	4,446 €
800	0.711	584	4,608 €
1000	0.945	666	4,896 €
1200	1.186	749	5,373 €
1400	1.430	831	5,882 €
Additional charge with 2. bottom or wear stripes per meter			461 €
Additional charge with Likufix SW48 adapter			1,093 €

OPERATING WEIGHT 21 TO 26 T



DITCH-CLEANING BUCKET RIGID CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 10mm, side parts HB450 15mm, cutting edge HB500 300x30mm, stiffening sickle, rear cutting edge HB500, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1800	0.803	800	5,369 €
2000	0.901	859	5,642 €
2200	0.999	919	5,994 €
2400	1.097	978	6,357 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with OQ80 adapter			375 €



DITCH-CLEANING BUCKET CLASS 6 WITH CYLINDER

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 10mm, side parts HB450 15mm, cutting edge HB500 300x30mm, stiffening sickle, rear cutting edge HB500, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25


Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1800	0.803	1020	8,900 €
2000	0.901	1079	9,140 €
2200	0.999	1139	9,420 €
2400	1.097	1198	9,710 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €

OPERATING WEIGHT 21 TO 26 T

DITCH-CLEANING BUCKET CLASS 6 WITH TILT MOTOR

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 10mm, side parts HB450 15mm, cutting edge HB500 300x30mm, stiffening sickle, rear cutting edge HB500, tilt range 2x50°, suitable QC21/25



Cutting edge [mm]	Capacity [m³]	Weight with BV250 [kg]	Price with BV250 to 23 t	Weight with BV260 [kg]	Price with BV260 to 26 t
1800	0.780	1260	12,576 €	1330	15,560 €
2000	0.875	1320	13,003 €	1390	15,987 €
2200	0.965	1390	13,256 €	1460	16,240 €
2400	1.060	1450	13,510 €	1520	16,504 €
Additional charge with OQ70/55 hydraulic adapter					3,652 €
Additional charge with GPS/sensor preparation with V90 plug					1,810 €
Additional charge with GPS/sensor preparation with 3/4" plug					1,630 €
Additional charge with manual throttle valve					120 €

OPERATING WEIGHT 21 TO 26 T



SLOPE BUCKET CLASS 6 MIT CYLINDER

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 10mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 250x30mm, rear cutting edge HB500, wear stripes lengthwise HB450 and crosswise HB500, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1800	1.281	860	11,486 €
2000	1.443	922	11,850 €
2100	1.524	953	12,266 €
2200	1.605	983	12,506 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with profile blade type 151 per meter			154 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €



SLOPE BUCKET CLASS 6 WITH TILT MOTOR

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 10mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 250x30mm, rear cutting edge HB500, with wear stripes lengthwise HB450 and crosswise HB500, tilt range 2x50°, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight with BV250 [kg]	Price with BV250 to 23 t	Weight with BV260 [kg]	Price with BV260 to 26 t
1800	1.280	1335	15,606 €	k. A.	18,623 €
2000	1.440	1405	16,126 €	k. A.	19,039 €
2200	1.600	1475	16,854 €	k. A.	19,872 €
Additional charge with screw-on reversible blade 250x25mm per meter					572 €
Additional charge with profile blade type 151 per meter					154 €
Additional charge with OQ70/55 hydraulic adapter					3,652 €
Additional charge with GPS/sensor preparation with V90 plug					1,810 €
Additional charge with GPS/sensor preparation with 3/4" plug					1,630 €
Additional charge with manual throttle valve					120 €

OPERATING WEIGHT 21 TO 26 T

TILT BACKHOE BUCKET CLASS 6 WITH CYLINDER – LIGHT VERSION

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 10mm, side parts HB450 8mm, side cutting edges HB450 20mm, cutting edge HB500 300x30mm, center pin 80mm, steel bushings inside swivel head, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	1.052	1035	10,390 €
1500	1.142	1069	10,570 €
1600	1.233	1102	10,770 €
1800	1.414	1169	11,100 €
Additional charge with 2. bottom or wear stripes per meter			461 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €

TILT BACKHOE BUCKET CLASS 6 WITH CYLINDER

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 12mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x35mm, center pin 80mm, steel bushings inside swivel head, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	1.048	1131	10,635 €
1500	1.139	1170	10,840 €
1600	1.229	1209	11,050 €
1800	1.410	1286	11,400 €
Additional charge with 2. bottom or wear stripes per meter			461 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €

OPERATING WEIGHT 21 TO 26 T



TILT BACKHOE BUCKET CLASS 6 WITH TILT MOTOR

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 12mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, tilt range 2x50°, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight with BV250 [kg]	Price with BV250 to 23 t	Weight with BV260 [kg]	Price with BV260 to 26 t
1400	0.980	1310	13,286 €	1380	17,136 €
1500	1.060	1360	13,432 €	1430	17,282 €
1600	1.140	1410	13,577 €	1480	17,432 €
1800	1.305	1510	13,858 €	1580	17,686 €
Additional charge with 2. bottom or wear stripes per meter					461 €
Additional charge with OQ70/55 hydraulic adapter					3,652 €
Additional charge with GPS/sensor preparation with V90 plug					1,810 €
Additional charge with GPS/sensor preparation with 3/4" plug					1,630 €
Additional charge with manual throttle valve					120 €

OPERATING WEIGHT 21 TO 26 T

LOADING BUCKET CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 12mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x35mm, suitable QC21/25 or OQ70/55



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	1.048	706	6,037 €
1500	1.139	745	6,145 €
1600	1.229	784	6,253 €
1800	1.410	861	6,469 €
Additional charge with 2. bottom or wear stripes per meter			461 €
Additional charge with OQ80 adapter			375 €

TILTROTATOR BUCKET CLASS 6S

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 12mm, side parts 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x30mm, suitable QC21/25 or OQ70/55



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1400	0.854	574	5,954 €
1600	1.018	646	6,173 €
1800	1.181	718	6,391 €
Additional charge with OQ80 adapter			375 €

OPERATING WEIGHT 21 TO 26 T



DEMOLITION AND SORTING BUCKET CLASS 6 WITH SKELETON BARS SW-VERSION

OPERATING WEIGHT 21 TO 26 T

Skeleton bars HB450 30mm, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x40mm, welded tooth system Cat J350 or ESCO U35, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
1200	1.090	1150	5	8,761 €	8,831 €
1400	1.316	1310	5	9,728 €	9,758 €
1500	1.429	1375	5	10,113 €	10,127 €
1600	1.541	1440	5	10,493 €	10,496 €
Additional charge with OQ80 adapter				375 €	

The bar distance may vary on the outer bars, depending on the cutting edge.



DEMOLITION AND SORTING BUCKET CLASS 6 WITH SKELETON BARS LH-VERSION

OPERATING WEIGHT 21 TO 26 T

Skeleton bars HB450 30mm, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x40mm, welded tooth system Cat J350 or ESCO U35, suitable SW48 or CW40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
1200	1.127	1190	5	8,761 €	8,831 €
1400	1.359	1300	5	9,728 €	9,758 €
1500	1.475	1370	5	10,113 €	10,127 €
1600	1.590	1440	5	10,493 €	10,496 €
Additional charge with Likufix SW48 adapter				1,093 €	


The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 21 TO 26 T

DEMOLITION AND SORTING BUCKET CLASS 6 WITH CROSS BARS SW-VERSION

OPERATING WEIGHT 21 TO 26 T

Cross bars HB500, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x40mm, welded tooth system Cat J350 or ESCO U35, suitable QC21/25 or OQ70/55



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
1200	1.090	985	5	8,339 €	8,698 €
1400	1.316	1065	5	9,125 €	9,483 €
1500	1.429	1110	5	9,395 €	9,754 €
1600	1.541	1155	5	9,666 €	10,019 €
Additional charge with OQ80 adapter				375 €	

DEMOLITION AND SORTING BUCKET CLASS 6 WITH CROSS BARS LH-VERSION

OPERATING WEIGHT 21 TO 26 T

Cross bars HB500, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x40mm, welded tooth system Cat J350 or ESCO U35, suitable SW48 or CW40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
1200	1.127	975	5	8,339 €	8,698 €
1400	1.359	1055	5	9,125 €	9,483 €
1500	1.475	1100	5	9,395 €	9,754 €
1600	1.590	1145	5	9,666 €	10,019 €
Additional charge with Likufix SW48 adapter				1,093 €	

OPERATING WEIGHT 21 TO 26 T



VHD-BACKHOE BUCKET SW-VERSION CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom and side parts HB450 12mm, side cutting edges HB450 30mm, cutting edge HB500 300x40mm, side wear plates HB450, wear stripes crosswise HB500 100x15mm, welded tooth system ESCO U35, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
600	0.446	602	3	6,291 €
800	0.652	716	4	6,922 €
1000	0.868	812	4	7,390 €
1200	1.090	928	5	8,020 €
1400	1.316	1024	5	8,653 €

Additional charge with OQ80 adapter

375 €



VHD-BACKHOE BUCKET LH-VERSION CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom and side parts HB450 12mm, side cutting edges HB450 30mm, cutting edge HB500 300x40mm, side wear plates HB450, wear stripes crosswise HB500 100x15mm, welded tooth system ESCO U35, suitable SW48 or CW40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
600	0.463	640	3	6,291 €
800	0.676	752	4	6,922 €
1000	0.898	846	4	7,390 €
1200	1.127	959	5	8,020 €
1400	1.359	1052	5	8,653 €

Additional charge with Likufix SW48 adapter

1,093 €

OPERATING WEIGHT 21 TO 26 T

ROCK BACKHOE BUCKET CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 10mm, side parts HB450 10mm, side cutting edges HB450 25mm, side part reinforcement HB450 20mm, cutting edge HB500 300x40mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J350 or ESCO U35, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
800	0.707	833	4	7,865 €	8,138 €
1200	1.209	1061	5	9,003 €	9,350 €
1400	1.465	1167	5	9,695 €	10,036 €

Additional charge with OQ80 adapter

375 €



RIPPING BUCKET CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 12mm, side parts HB450 12mm, side cutting edges HB450 35mm, side part reinforcement HB450 25mm, cutting edge HB500 400x60mm, with wear stripes crosswise HB500, welded tooth system ESCO U45, suitable QC21/25 or OQ70/55*

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
700	0.315	850	3	7,890 €

Additional charge with OQ80 adapter*

375 €

*The cutting widths may vary slightly for marked or other adapters in order to ensure the best possible technical design.



OPERATING WEIGHT 21 TO 26 T



STONE LAYING BUCKET CLASS 6

OPERATING WEIGHT 21 TO 26 T

Bottom HB450 12mm, side parts HB450 30mm, cutting edge HB500 300x40mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J350 or ESCO U35, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
1000	0.963	1002	4	8,334 €	8,626 €
1100	1.097	1060	4	8,673 €	8,964 €
1200	1.232	1125	5	9,109 €	9,468 €
1300	1.369	1184	5	9,447 €	9,806 €

Additional charge with OQ80 adapter

375 €



RIPPER TOOTH

OPERATING WEIGHT 16 TO 26 T

Leg with changeable tooth tips and leg protection HB450, ripper tooth Cat 6J8812/9W2451, suitable QC21/25 or OQ70/55

Height [mm]	Leg [mm]	Weight [kg]	Price
1047	80	460	4,608 €

Additional charge with OQ80 adapter

375 €

OPERATING WEIGHT 21 TO 26 T

GRAB RAKE

OPERATING WEIGHT 16 TO 26 T

HB450 legs with changeable ripper tooth, leg thickness 50mm, ripper tooth J300, suitable QC21/25 or OQ70/55

Legs	Width [mm]	Weight [kg]	Price
3	1200	430	7,365 €
4	1500	690	9,102 €


Additional charge with OQ80 adapter

375 €



MOUNTING PLATE

Type	Price with drilling pattern
QC21/25	2,856 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 16 t

Type	Weight [kg]	Price
QC21/25	170	2,978 €



OPERATING WEIGHT 26 TO 30 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 19 TO 40 T

Compatible with system Lehnhoff, hydraulic Quick coupler with drop protection

Type	Version	Operating weight [t]	Weight [kg]	Price
QC21M/25M	mechanical	to 40	320	6,503 €
QC21HF	hydraulic	to 28	270	on request
QC25HF	hydraulic	to 34	360	on request
Installation kit QC21/25HF (12V or 24V)				802 €
Additional charge with welded load hook 10 t				415 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 25 TO 29 T

Quick coupler QuickChange with hydraulic tilt motor from HKS, tilt range 140°

Type	Operating weight [t]	Version	Weight [kg]	Price
QC21M/25M-BV270	25 to 29	mechanical	665	20.585 €
QC21HF-BV270	25 to 28	hydraulic	670	on request
Installation kit QC21HF (12V or 24V)				802 €
Additional charge with welded load hook 10 t				415 €

OPERATING WEIGHT 26 TO 30 T

WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC21/25	140	1,197 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 18 TO 43 T

Type	Operating weight [t]	Weight [kg]	Price
OQ70/55	18 to 32	95	1,030 €
OQ80	25 to 43	145	1,374 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC21/25	220	2,331 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC21/25	290	3,357 €



OPERATING WEIGHT 26 TO 30 T



BACKHOE BUCKET SW-VERSION CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, side wear plates HB450 12mm, side parts put on bottom, welded tooth system Cat J350 or ESCO U35, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
800	0.743	689	4	5,545 €	5,732 €
1000	0.989	779	4	5,833 €	6,020 €
1200	1.242	885	5	6,286 €	6,520 €
1400	1.500	974	5	6,806 €	7,039 €
1600	1.759	1064	5	7,186 €	7,420 €
Additional charge with welded front-insert blade 300x30mm per meter, without replacement teeth				466 €	
Additional charge with 2. bottom or wear stripes per meter				489 €	
Additional charge with OQ80 adapter				375 €	



BACKHOE BUCKET SW-VERSION CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, side wear plates HB450 12mm, side parts put on bottom, without teeth, suitable QC21/25 or OQ70/55


Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
800	0.782	660	5,053 €
1000	1.041	754	5,342 €
1200	1.308	849	5,672 €
1400	1.579	943	6,192 €
1600	1.852	1038	6,572 €
Additional charge with 2. bottom or wear stripes per meter			489 €
Additional charge with OQ80 adapter			375 €

OPERATING WEIGHT 26 TO 30 T

BACKHOE BUCKET LH-VERSION CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, side wear plates HB450 12mm, side parts put on bottom, welded tooth system Cat J350 or ESCO U35, suitable SW48 or CW40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
800	0.749	680	4	5,545 €	5,732 €
1000	0.994	763	4	5,833 €	6,020 €
1200	1.246	862	5	6,286 €	6,520 €
1400	1.502	945	5	6,806 €	7,039 €
1600	1.758	1027	5	7,186 €	7,420 €
Additional charge with welded front-insert blade 300x30mm per meter, without replacement teeth				466 €	
Additional charge with 2. bottom or wear stripes per meter				489 €	
Additional charge with Likufix SW48 adapter				1,093 €	

BACKHOE BUCKET LH-VERSION CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, side wear plates HB450 12mm, side parts put on bottom, without teeth, suitable SW48 or CW40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
800	0.789	636	5,053 €
1000	1.046	724	5,342 €
1200	1.312	811	5,672 €
1400	1.581	899	6,192 €
1600	1.851	987	6,572 €
Additional charge with 2. bottom or wear stripes per meter			489 €
Additional charge with Likufix SW48 adapter			1,093 €

OPERATING WEIGHT 26 TO 30 T



DITCH-CLEANING BUCKET RIGID CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts HB450 20mm, cutting edge HB500 300x35mm, stiffening sickle, rear cutting edge HB500, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
2000	1.137	1042	6,923 €
2200	1.262	1113	7,344 €
2400	1.386	1184	7,775 €
2600	1.511	1254	8,233 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with OQ80 adapter			375 €



DITCH-CLEANING BUCKET CLASS 6S WITH CYLINDER

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts HB450 20mm, cutting edge HB500 300x35mm, stiffening sickle, rear cutting edge HB500, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
2000	1.137	1467	12,010 €
2200	1.262	1538	12,350 €
2400	1.386	1609	12,680 €
2600	1.511	1679	13,170 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €


OPERATING WEIGHT 26 TO 30 T

DITCH-CLEANING BUCKET CLASS 6S WITH TILT MOTOR

OPERATING WEIGHT 26 TO 29 T

Bottom HB450 12mm, side parts HB450 20mm, cutting edge HB500 300x35mm, stiffening sickle, rear cutting edge HB500, tilt range 2x50°, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV270
2000	1.085	1770	19,509 €
2200	1.200	1840	19,803 €
2400	1.315	1910	20,108 €
2600	1.435	1980	20,635 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €
Additional charge with GPS/sensor preparation with V90 plug			1,810 €
Additional charge with GPS/sensor preparation with 3/4" plug			1,630 €
Additional charge with manual throttle valve			120 €



SLOPE BUCKET CLASS 6S MIT CYLINDER

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 10mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x30mm, rear cutting edge HB500, with wear stripes lengthwise HB450 and crosswise HB500, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1800	1.501	1073	14,201 €
2000	1.693	1153	14,639 €
2100	1.790	1193	15,148 €
2200	1.886	1233	15,471 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with profile blade type 151 per meter			154 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €



OPERATING WEIGHT 26 TO 30 T



SLOPE BUCKET CLASS 6S WITH TILT MOTOR

OPERATING WEIGHT 26 TO 29 T

Bottom HB450 10mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x30mm, rear cutting edge HB500, with wear stripes lengthwise HB450 and crosswise HB500, tilt range 2x50°, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV270
1800	1.480	k. A.	21,224 €
2000	1.670	k. A.	21,640 €
2200	1.850	k. A.	22,472 €
Additional charge with screw-on reversible blade 250x25mm per meter			572 €
Additional charge with profile blade type 151 per meter			154 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €
Additional charge with GPS/sensor preparation with V90 plug			1,810 €
Additional charge with GPS/sensor preparation with 3/4" plug			1,630 €
Additional charge with manual throttle valve			120 €



TILT BACKHOE BUCKET CLASS 6S WITH CYLINDER – LIGHT VERSION

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, center pin 80mm, steel bushings inside swivel head, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1500	1.261	1222	11,040 €
1600	1.363	1263	11,240 €
1800	1.565	1346	11,570 €
2000	1.767	1429	11,910 €
Additional charge with 2. bottom or wear stripes per meter			489 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €

OPERATING WEIGHT 26 TO 30 T

TILT BACKHOE BUCKET CLASS 6S WITH CYLINDER

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, center pin 100mm, steel bushings inside swivel head, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1500	1.279	1392	12,980 €
1600	1.382	1436	13,170 €
1800	1.587	1524	13,510 €
2000	1.793	1612	13,840 €
Additional charge with 2. bottom or wear stripes per meter			489 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €




TILT BACKHOE BUCKET CLASS 6S WITH TILT MOTOR

OPERATING WEIGHT 26 TO 29 T

Bottom HB450 12mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, tilt range 2x50°, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV270
1500	1.250	1675	19,039 €
1600	1.350	1730	19,195 €
1800	1.550	1840	19,456 €
2000	1.750	1950	19,767 €
Additional charge with 2. bottom or wear stripes per meter			489 €
Additional charge with OQ70/55 hydraulic adapter			3,652 €
Additional charge with GPS/sensor preparation with V90 plug			1,810 €
Additional charge with GPS/sensor preparation with 3/4" plug			1,630 €
Additional charge with manual throttle valve			120 €



OPERATING WEIGHT 26 TO 30 T



LOADING BUCKET CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1500	1.279	817	6,411 €
1600	1.382	861	6,519 €
1800	1.587	949	6,735 €
2000	1.793	1037	6,951 €
Additional charge with 2. bottom or wear stripes per meter			489 €
Additional charge with OQ80 adapter			375 €

OPERATING WEIGHT 26 TO 30 T

DEMOLITION AND SORTING BUCKET CLASS 6S WITH SKELETON BARS SW-VERSION




OPERATING WEIGHT 26 TO 30 T

Skeleton bars HB450 30mm, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x40mm, welded tooth system Cat J350 or ESCO U35, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
1400	1.500	1520	5	10,779 €	11,132 €
1500	1.630	1610	5	11,231 €	11,585 €
1600	1.759	1700	5	11,684 €	12,042 €
1800	2.018	1940	6	12,844 €	13,271 €
Additional charge with OQ80 adapter					375 €

The bar distance may vary on the outer bars, depending on the cutting edge.

DEMOLITION AND SORTING BUCKET CLASS 6S WITH SKELETON BARS LH-VERSION




OPERATING WEIGHT 26 TO 30 T

Skeleton bars HB450 30mm, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x40mm, welded tooth system Cat J350 or ESCO U35, suitable SW48 or CW40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
1400	1.502	1490	5	10,779 €	11,132 €
1500	1.630	1510	5	11,231 €	11,585 €
1600	1.758	1530	5	11,684 €	12,042 €
1800	2.014	1600	6	12,844 €	13,271 €
Additional charge with Likufix SW48 adapter					1,093 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 26 TO 30 T



DEMOLITION AND SORTING BUCKET CLASS 6S WITH CROSS BARS SW-VERSION

OPERATING WEIGHT 26 TO 30 T

Cross bars HB500, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x40mm, welded tooth system Cat J350 or ESCO U35, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
1400	1.500	1150	5	10,483 €	10,555 €
1500	1.630	1205	5	10,888 €	10,950 €
1600	1.759	1255	5	11,283 €	11,330 €
1800	2.018	1360	6	12,085 €	12,178 €

Additional charge with OQ80 adapter

375 €



DEMOLITION AND SORTING BUCKET CLASS 6S WITH CROSS BARS LH-VERSION

OPERATING WEIGHT 26 TO 30 T

Cross bars HB500, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x40mm, welded tooth system Cat J350 or ESCO U35, suitable SW48 or CW40

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J350	Price with ESCO U35
1400	1.502	1145	5	10,483 €	10,555 €
1500	1.630	1200	5	10,888 €	10,950 €
1600	1.758	1250	5	11,283 €	11,330 €
1800	2.014	1355	6	12,085 €	12,178 €

Additional charge with Likufix SW48 adapter

1,093 €

OPERATING WEIGHT 26 TO 30 T

VHD-BACKHOE BUCKET SW-VERSION CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom and side parts HB450 12mm, side cutting edges HB450 30mm, cutting edge HB500 300x40mm, side wear plates HB450, wear stripes crosswise HB500 100x15mm, welded tooth system ESCO U40, suitable QC21/25 or OQ70/55



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
600	0.509	701	3	7,291 €
800	0.743	827	4	8,039 €
1000	0.989	935	4	8,619 €
1200	1.242	1062	5	9,367 €
1400	1.500	1169	5	10,013 €


Additional charge with OQ80 adapter

375 €

VHD-BACKHOE BUCKET LH-VERSION CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom and side parts HB450 12mm, side cutting edges HB450 30mm, cutting edge HB500 300x40mm, side wear plates HB450, wear stripes crosswise HB500 100x15mm, welded tooth system ESCO U40, suitable SW48 or CW40



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
600	0.516	698	3	7,291 €
800	0.749	816	4	8,039 €
1000	0.994	916	4	8,619 €
1200	1.246	1034	5	9,367 €
1400	1.502	1134	5	10,013 €

Additional charge with Likufix SW48 adapter

1,093 €

OPERATING WEIGHT 26 TO 30 T



ROCK BACKHOE BUCKET CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts HB450 12mm, side cutting edges HB450 30mm, side part reinforcement HB450 25mm, cutting edge HB500 300x40mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J400 or ESCO U40, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J400	Price with ESCO U40
800	0.809	1118	4	9,414 €	9,683 €
1000	1.099	1242	4	10,148 €	10,417 €
1200	1.399	1389	5	11,023 €	11,359 €
1400	1.702	1512	5	11,757 €	12,094 €
1500	1.854	1574	5	12,112 €	12,450 €
1600	2.007	1659	5	12,552 €	12,858 €

Additional charge with OQ80 adapter

375 €



RIPPING BUCKET CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 15mm, side parts HB450 15mm, side cutting edges HB450 40mm, side part reinforcement HB450 30mm, cutting edge HB500 400x60mm, with wear stripes crosswise HB500, welded tooth system ESCO U55, suitable QC21/25 or OQ70/55

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
750	0.372	998	3	9,040 €

Additional charge with OQ80 adapter*

375 €

*The cutting widths may vary slightly for marked or other adapters in order to ensure the best possible technical design.

OPERATING WEIGHT 26 TO 30 T

STONE LAYING BUCKET CLASS 6S

OPERATING WEIGHT 26 TO 30 T

Bottom HB450 12mm, side parts HB450 40mm, cutting edge HB500 400x40mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J400 or ESCO U40, suitable QC21/25 or OQ70/55



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J400	Price with ESCO U40
1000	1.071	1380	4	9,899 €	10,311 €
1100	1.227	1452	4	10,248 €	10,653 €
1200	1.385	1534	5	10,789 €	11,298 €
1300	1.544	1606	5	11,158 €	11,668 €

Additional charge with OQ80 adapter

375 €

RIPPER TOOTH

OPERATING WEIGHT 26 TO 36 T

Leg with changeable tooth tips and leg protection HB450, ripper tooth Cat Ripper 4T5502SX, suitable QC21/25 or OQ70/55



Height [mm]	Leg [mm]	Weight [kg]	Price
1079	100	on request	6,139 €

Additional charge with OQ80 adapter

375 €

OPERATING WEIGHT 26 TO 30 T




GRAB RAKE

OPERATING WEIGHT 26 TO 36 T

HB450 legs with changeable ripper tooth, leg thickness 50mm, ripper tooth J350, suitable QC21/25 or OQ70/55

Legs	Width [mm]	Weight [kg]	Price
3	1500	670	8,480 €
4	1800	950	10,466 €
5	2000	1020	12,298 €
Additional charge with OQ80 adapter			375 €



MOUNTING PLATE

Type	Price with drilling pattern
QC21/25	2,856 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 16 t

Type	Weight [kg]	Price
QC21/25	170	2,978 €

OPERATING WEIGHT 26 TO 30 T

OPERATING WEIGHT 30 TO 36 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 19 TO 40 T

Compatible with system Lehnhoff, hydraulic Quick coupler with drop protection

Type	Version	Operating weight [t]	Weight [kg]	Price
QC21M/25M	mechanical	to 40	320	6,503 €
QC21HF	hydraulic	to 28	270	on request
QC25HF	hydraulic	to 34	360	on request
Installation kit QC21/25HF (12V or 24V)				802 €
Additional charge with welded load hook 10 t				415 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 28 TO 34 T

Quick coupler QuickChange with hydraulic tilt motor from HKS, tilt range 140°

Type	Operating weight [t]	Version	Weight [kg]	Price
QC21M/25M-BV290	28 to 34	mechanical	720	23,325 €
QC25HF-BV290	28 to 34	hydraulic	725	on request
Installation kit QC25HF (12V or 24V)				802 €
Additional charge with welded load hook 10 t				415 €

OPERATING WEIGHT 30 TO 36 T

WELDING ADAPTER – QUICKCHANGE


Type	Weight [kg]	Price
QC21/25	140	1,197 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 25 TO 43 T

Type	Weight [kg]	Price
OQ80	145	1,374 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC21/25	220	2,331 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC21/25	290	3,357 €



OPERATING WEIGHT 30 TO 36 T



BACKHOE BUCKET SW-VERSION CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 12mm, side parts 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x50mm, side wear plates HB450 12mm, side parts put on bottom, welded tooth system
Cat J460 or ESCO U40, suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U40
1000	1.110	887	4	6,996 €	7,562 €
1200	1.396	1010	5	7,701 €	8,351 €
1400	1.688	1117	5	8,369 €	9,057 €
1600	1.982	1224	5	8,998 €	9,700 €
1800	2.277	1347	6	9,647 €	10,449 €

Additional charge with welded front-insert blade 300x30mm per meter, without replacement teeth 466 €

Additional charge with 2. bottom or wear stripes per meter 541 €



BACKHOE BUCKET SW-VERSION CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 12mm, side parts 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x50mm, side wear plates HB450 12mm, side parts put on bottom, without teeth, suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1000	1.169	861	6,602 €
1200	1.469	973	7,153 €
1400	1.777	1085	7,858 €
1600	2.087	1197	8,438 €
1800	2.397	1309	9,016 €


Additional charge with 2. bottom or wear stripes per meter 541 €

OPERATING WEIGHT 30 TO 36 T

BACKHOE BUCKET LH-VERSION CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 12mm, side parts 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x50mm, side wear plates HB450 12mm, side parts put on bottom, welded tooth system
Cat J460 or ESCO U40, suitable SW66 or CW45



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U40
1000	1.078	842	4	6,996 €	7,562 €
1200	1.353	948	5	7,701 €	8,351 €
1400	1.634	1039	5	8,369 €	9,057 €
1600	1.915	1129	5	8,998 €	9,700 €
1800	2.197	1235	6	9,647 €	10,449 €

Additional charge with welded front-insert blade 300x30mm per meter, without replacement teeth 466 €


Additional charge with 2. bottom or wear stripes per meter 541 €

Additional charge with Likufix SW66 adapter 1,707 €

BACKHOE BUCKET LH-VERSION CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 12mm, side parts 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x50mm, side wear plates HB450 12mm, side parts put on bottom, without teeth, suitable SW66 or CW45



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1000	1.134	808	6,602 €
1200	1.424	903	7,153 €
1400	1.719	998	7,858 €
1600	2.016	1093	8,438 €
1800	2.313	1189	9,016 €

Additional charge with 2. bottom or wear stripes per meter 541 €

Additional charge with Likufix SW66 adapter 1,707 €

OPERATING WEIGHT 30 TO 36 T



DITCH-CLEANING BUCKET RIGID CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 12mm, side parts HB450 20mm, cutting edge HB500 300x40mm, stiffening sickle, rear cutting edge HB500, suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
2000	1.304	1195	7,902 €
2200	1.449	1277	8,410 €
2400	1.593	1360	8,942 €
2600	1.738	1443	9,417 €
Additional charge with screw-on reversible blade 330x30mm per meter			805 €



DITCH-CLEANING BUCKET CLASS 7 WITH CYLINDER

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 12mm, side parts HB450 20mm, cutting edge HB500 300x40mm, stiffening sickle, rear cutting edge HB500, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25


Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
2000	1.304	1620	13,100 €
2200	1.449	1702	13,510 €
2400	1.593	1785	13,940 €
2600	1.738	1868	14,450 €
Additional charge with screw-on reversible blade 330x30mm per meter			805 €
Additional charge with OQ80 hydraulic adapter			4,110 €

OPERATING WEIGHT 30 TO 36 T

DITCH-CLEANING BUCKET CLASS 7 WITH TILT MOTOR

OPERATING WEIGHT 28 TO 34 T

Bottom HB450 12mm, side parts HB450 20mm, cutting edge HB500 300x40mm, stiffening sickle, rear cutting edge HB500, tilt range 2x50°, suitable QC21/25



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV290
2000	1.300	1864	23,620 €
2200	1.440	1953	23,985 €
2400	1.580	2042	24,320 €
2600	1.720	2131	24,980 €
adapter with OQ80 hydraulic adapter			4,110 €
Additional charge with GPS/sensor preparation with V90 plug			1,850 €
Additional charge with GPS/sensor preparation with 3/4" plug			1,630 €
Additional charge with manual throttle valve			120 €

OPERATING WEIGHT 30 TO 36 T



SLOPE BUCKET CLASS 7 WITH CYLINDER

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 12mm, side parts HB450 10mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, rear cutting edge HB500, with wear stripes lengthwise HB450 and crosswise HB500, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1800	1.720	1280	15,783 €
2000	1.944	1379	16,272 €
2100	2.055	1428	16,917 €
2200	2.167	1477	17,292 €
Additional charge with screw-on reversible blade 330x30mm per meter			805 €
Additional charge with profile blade type 151 per meter			154 €
Additional charge with OQ80 hydraulic adapter			4,110 €



SLOPE BUCKET CLASS 7 WITH TILT MOTOR

OPERATING WEIGHT 29 TO 36 T

Bottom HB450 12mm, side parts HB450 12mm, side cutting edges HB450 25mm, cutting edge HB500 300x40mm, rear cutting edge HB500, with wear stripes lengthwise HB450 and crosswise HB500, tilt range 2x50° suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight with BV290 [kg]	Price with BV290 to 34 t	Weight with BV300 [kg]	Price with BV300 to 36 t
1800	1.680	1860	26,426 €	1860	30,379 €
2000	1.900	1970	26,946 €	1970	30,900 €
2200	2.100	2080	27,779 €	2080	31,835 €
Additional charge with screw-on reversible blade 330x30mm per meter					805 €
Additional charge with profile blade type 151 per meter					154 €
Additional charge with OQ80 hydraulic adapter					4,110 €
Additional charge with GPS/sensor preparation with V90 plug					1,850 €
Additional charge with GPS/sensor preparation with 3/4" plug					1,630 €
Additional charge with manual throttle valve					120

OPERATING WEIGHT 30 TO 36 T

TILT BACKHOE BUCKET CLASS 7 WITH CYLINDER

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 15mm, side parts HB450 10mm, side cutting edges HB450 30mm, cutting edge HB500 300x40mm, center pin 100mm, steel bushings inside swivel head, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1500	1.426	1597	13,290 €
1600	1.542	1647	13,500 €
1800	1.772	1746	13,853 €
2000	2.003	1845	14,210 €
Additional charge with 2. bottom or wear stripes per meter			541 €
Additional charge with OQ80 hydraulic adapter			4,110 €

TILT BACKHOE BUCKET CLASS 7 WITH TILT MOTOR

OPERATING WEIGHT 30 TO 34 T

Bottom HB450 15mm, side parts HB450 10mm, side cutting edges HB450 30mm, cutting edge HB500 300x40mm, tilt range 2x50°, suitable QC21/25



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price with BV290
1500	1.312	1763	23,565 €
1600	1.415	1823	23,721 €
1800	1.620	1942	24,085 €
2000	1.825	2061	24,449 €
Additional charge with 2. bottom or wear stripes per meter			541 €
Additional charge with OQ80 hydraulic adapter			4,110 €
Additional charge with GPS/sensor preparation with V90 plug			1,850 €
Additional charge with GPS/sensor preparation with 3/4" plug			1,630 €
Additional charge with manual throttle valve			120 €

OPERATING WEIGHT 30 TO 36 T



LOADING BUCKET CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 15mm, side parts HB450 10mm,
side cutting edges HB450 30mm, cutting edge HB500 300x40mm,
suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1500	1.426	942	8,105 €
1600	1.542	992	8,355 €
1800	1.772	1091	8,771 €
2000	2.003	1190	9,187 €
Additional charge with 2. bottom or wear stripes per meter			541 €

OPERATING WEIGHT 30 TO 36 T

DEMOLITION AND SORTING BUCKET CLASS 7 WITH SKELETON BARS SW-VERSION

OPERATING WEIGHT 30 TO 36 T

Skeleton bars HB450 30mm, bar distance 60mm, side parts HB450
25mm, cutting edge HB500 300x50mm, welded tooth system
Cat J460 or ESCO U40, suitable QC21/25 or OQ80



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U40
1400	1.688	1810	5	12,985 €	13,223 €
1600	1.982	2000	5	14,015 €	14,253 €
1800	2.277	2210	6	15,232 €	15,505 €
2000	2.572	2410	6	16,043 €	16,326 €

The bar distance may vary on the outer bars, depending on the cutting edge.

DEMOLITION AND SORTING BUCKET CLASS 7 WITH SKELETON BARS LH-VERSION

OPERATING WEIGHT 30 TO 36 T


Skeleton bars HB450 30mm, bar distance 60mm, side parts HB450
25mm, cutting edge HB500 300x50mm, welded tooth system
Cat J460 or ESCO U40, suitable SW66 or CW45



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U40
1400	1.634	1710	5	12,985 €	13,223 €
1600	1.915	1910	5	14,015 €	14,253 €
1800	2.197	2200	6	15,232 €	15,505 €
2000	2.479	2400	6	16,043 €	16,326 €
Additional charge with Likufix SW66 adapter					1,707 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 30 TO 36 T



DEMOLITION AND SORTING BUCKET CLASS 7 WITH CROSS BARS SW-VERSION

OPERATING WEIGHT 30 TO 36 T

Cross bars HB500, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x50mm, welded tooth system Cat J460 or ESCO U40, suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U40
1400	1.688	1480	5	12,615 €	12,859 €
1600	1.982	1610	5	13,474 €	13,712 €
1800	2.277	1735	6	14,524 €	14,808 €
2000	2.572	1860	6	15,299 €	15,578 €



DEMOLITION AND SORTING BUCKET CLASS 7 WITH CROSS BARS LH-VERSION

OPERATING WEIGHT 30 TO 36 T

Cross bars HB500, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x50mm, welded tooth system Cat J460 or ESCO U40, suitable SW66 or CW45

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U40
1400	1.634	1460	5	12,615 €	12,859 €
1600	1.915	1590	5	13,474 €	13,712 €
1800	2.197	1715	6	14,524 €	14,808 €
2000	2.479	1840	6	15,299 €	15,578 €

Additional charge with Likufix SW66 adapter

1,707 €

OPERATING WEIGHT 30 TO 36 T

VHD-BACKHOE BUCKET SW-VERSION CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom and side parts HB450 12mm, side cutting edges HB450 35mm, cutting edge HB500 300x50mm, side wear plates HB450, wear stripes crosswise HB500 100x15mm, welded tooth system ESCO U45, suitable QC21/25 or OQ80



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
1000	1.110	1064	4	10,156 €
1200	1.396	1212	5	11,241 €
1400	1.688	1340	5	12,060 €
1600	1.982	1469	5	12,968 €
1800	2.277	1616	6	13,853 €

VHD-BACKHOE BUCKET LH-VERSION CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom and side parts HB450 12mm, side cutting edges HB450 35mm, cutting edge HB500 300x50mm, side wear plates HB450, wear stripes crosswise HB500 100x15mm, welded tooth system ESCO U45, suitable SW66 or CW45



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
1000	1.078	1010	4	10,156 €
1200	1.353	1138	5	11,241 €
1400	1.634	1247	5	12,060 €
1600	1.915	1355	5	12,968 €
1800	2.197	1482	6	13,853 €

Additional charge with Likufix SW66 adapter

1,707 €

OPERATING WEIGHT 30 TO 36 T



ROCK BACKHOE BUCKET CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 12mm, side parts HB450 15mm, side cutting edges HB450 35mm, side part reinforcement HB450 30mm, cutting edge HB500 400x50mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J460 or ESCO U45, suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U45
1000	1.195	1558	4	12,132 €	13,062 €
1200	1.533	1748	5	13,170 €	14,333 €
1400	1.879	1906	5	14,022 €	15,182 €
1600	2.228	2096	5	14,956 €	16,246 €



RIPPING BUCKET CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 15mm, side parts HB450 15mm, side cutting edges HB450 40mm, side part reinforcement HB450 30mm, cutting edge HB500 400x60mm, with wear stripes crosswise HB500, welded tooth system ESCO U55, suitable QC21/25 or OQ80*

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
750	0.372	998	3	9,295 €

*The cutting widths may vary slightly for marked or other adapters in order to ensure the best possible technical design.

OPERATING WEIGHT 30 TO 36 T

STONE LAYING BUCKET CLASS 7

OPERATING WEIGHT 30 TO 36 T

Bottom HB450 12mm, side parts HB450 40mm, cutting edge HB500 400x50mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J460 or ESCO U40, suitable QC21/25 or OQ80



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U40
1000	1.243	1658	4	12,381 €	12,553 €
1100	1.426	1746	4	12,818 €	12,989 €
1200	1.612	1847	5	13,452 €	13,681 €
1300	1.800	1935	5	13,890 €	14,117 €

RIPPER TOOTH

OPERATING WEIGHT 26 TO 36 T

Leg with changeable tooth tips and leg protection HB450, ripper tooth Cat Ripper 4T5502SX, suitable QC21/25 or OQ80

Height [mm]	Leg [mm]	Weight [kg]	Price
1079	100	on request	6,514 €




GRAB RAKE

OPERATING WEIGHT 26 TO 36 T

HB450 legs with changeable ripper tooth, leg thickness 50mm, ripper tooth J350, suitable QC21/25 or OQ80

Legs	Width [mm]	Weight [kg]	Price
3	1500	670	8,855 €
4	1800	950	10,841 €
5	2000	1020	12,673 €





MOUNTING PLATE

Type	Price with drilling pattern
QC21/25	2,856 €




LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 16 t

Type	Weight [kg]	Price
QC21/25	170	2,978 €

OPERATING WEIGHT 36 TO 45 T




QUICK COUPLER – HENLE QUICKCHANGE

OPERATING WEIGHT 19 TO 40 T

Compatible with system Lehnhoff, hydraulic Quick coupler with drop protection

Type	Version	Operating weight [t]	Weight [kg]	Price
QC21M/25M	mechanical	to 40	320	6,503 €
QC21HF	hydraulic	to 28	270	on request
QC25HF	hydraulic	to 34	360	on request
Installation kit QC21/25HF (12V or 24V)				802 €
Additional charge with welded load hook 10 t				415 €



TILT COUPLER – QUICKCHANGE/ HKS

OPERATING WEIGHT 28 TO 38 T

Quick coupler QuickChange with hydraulic tilt motor from HKS, tilt range 140°

Type	Operating weight [t]	Version	Weight [kg]	Price
QC21M/25M-BV300	28 to 38	mechanical	720	27,598 €
QC25HF-BV300	28 to 34	hydraulic	725	on request
Installation kit QC25HF (12V or 24V)				802 €
Additional charge with welded load hook 10 t				415 €

OPERATING WEIGHT 36 TO 45 T

WELDING ADAPTER – QUICKCHANGE

Type	Weight [kg]	Price
QC21/25	140	1,197 €



WELDING ADAPTER – OILQUICK

OPERATING WEIGHT 25 TO 43 T

Type	Weight [kg]	Price
OQ80	145	1,374 €



GRIPPER ADAPTER WITHOUT UNIVERSAL JOINT

Type	Weight [kg]	Price
QC21/25	220	2,331 €



GRIPPER ADAPTER WITH UNIVERSAL JOINT

Type	Weight [kg]	Price
QC21/25	290	3,357 €



OPERATING WEIGHT 36 TO 45 T



BACKHOE BUCKET SW-VERSION CLASS 7S

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 12mm, side parts 12mm, side cutting edges HB450 30mm, cutting edge HB500 300x50mm, side wear plates HB450 15mm, side parts put on bottom, welded tooth system
Cat J460 or ESCO U45, suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U45
1200	1.596	1227	5	8,529 €	9,318 €
1400	1.935	1340	5	9,161 €	9,937 €
1600	2.278	1453	5	9,861 €	10,546 €
1800	2.623	1598	6	10,580 €	11,511 €
2000	2.967	1711	6	11,080 €	11,998 €

Additional charge with welded front-insert blade 300x30mm per meter, without replacement teeth 466 €

Additional charge with 2. bottom or wear stripes per meter 850 €



BACKHOE BUCKET SW-VERSION CLASS 7S

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 12mm, side parts 12mm, side cutting edges HB450 30mm, cutting edge HB500 300x50mm, side wear plates HB450 15mm, side parts put on bottom, without teeth, suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1200	1.680	1104	7,963 €
1400	2.036	1222	8,624 €
1600	2.398	1340	9,273 €
1800	2.761	1458	9,921 €
2000	3.124	1577	10,446 €


Additional charge with 2. bottom or wear stripes per meter 850 €

OPERATING WEIGHT 36 TO 45 T

BACKHOE BUCKET LH-VERSION CLASS 7S

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 12mm, side parts 12mm, side cutting edges HB450 30mm, cutting edge HB500 300x50mm, side wear plates HB450 15mm, side parts put on bottom, welded tooth system
Cat J460 or ESCO U45, suitable SW66 or CW45



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U45
1200	1.581	1183	5	8,529 €	9,318 €
1400	1.914	1281	5	9,161 €	9,937 €
1600	2.252	1379	5	9,861 €	10,546 €
1800	2.590	1510	6	10,580 €	11,511 €
2000	2.929	1608	6	11,080 €	11,998 €

Additional charge with welded front-insert blade 300x30mm per meter, without replacement teeth 466 €

Additional charge with 2. bottom or wear stripes per meter 850 €

Additional charge with Likufix SW66 adapter 1,707 €

BACKHOE BUCKET LH-VERSION CLASS 7S

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 12mm, side parts 12mm, side cutting edges HB450 30mm, cutting edge HB500 300x50mm, side wear plates HB450 15mm, side parts put on bottom, without teeth, suitable SW66 or CW45




Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1200	1.664	1058	7,963 €
1400	2.015	1161	8,624 €
1600	2.370	1264	9,273 €
1800	2.727	1368	9,921 €
2000	3.083	1471	10,446 €

Additional charge with 2. bottom or wear stripes per meter 850 €

Additional charge with Likufix SW66 adapter 1,707 €

OPERATING WEIGHT 36 TO 45 T



DITCH-CLEANING BUCKET CLASS 7S WITH TILT MOTOR

OPERATING WEIGHT 28 TO 45 T

Bottom HB450 12mm, side parts HB450 20mm, cutting edge HB500 300x40mm, stiffening sickle, rear cutting edge HB500, tilt range 2x50°, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight with BV300 [kg]	Price with BV300 to 38 t	Weight with BV350 [kg]	Price with BV350 to 45 t
2200	1.440	2470	28,258 €	k. A.	35,292 €
2400	1.580	2560	28,593 €	k. A.	35,637 €
2600	1.720	2650	29,253 €	k. A.	36,287 €
2800	1.860	2740	29,598 €	k. A.	36,642 €
Additional charge with OQ80 hydraulic adapter					4,110 €
Additional charge with GPS/sensor preparation with V90 plug					1,850 €
Additional charge with GPS/sensor preparation with 3/4" plug					1,630 €
Additional charge with manual throttle valve					120 €



SLOPE BUCKET CLASS 7S WITH TILT MOTOR

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 12mm, side parts HB450 12mm, side cutting edges HB450 30mm, cutting edge HB500 300x40mm, rear cutting edge HB500, with wear stripes lengthwise HB450 and crosswise HB500, tilt range 2x50°, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight with BV300 [kg]	Price with BV300 to 38 t	Weight with BV350 [kg]	Price with BV350 to 45 t
1800	1.680	2330	31,524 €	k. A.	39,118 €
2000	1.900	2465	32,148 €	k. A.	39,639 €
2200	2.100	2600	32,876 €	k. A.	40,367 €
Additional charge with screw-on reversible blade 330x30mm per meter					805 €
Additional charge with profile blade type 151					154 €
Additional charge with OQ80 hydraulic adapter					4,110 €
Additional charge with GPS/sensor preparation with V90 plug					1,850 €
Additional charge with GPS/sensor preparation with 3/4" plug					1,630 €
Additional charge with manual throttle valve					120 €

OPERATING WEIGHT 36 TO 45 T

TILT BACKHOE BUCKET CLASS 7S WITH CYLINDER – LIGHT VERSION

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 15mm, side parts HB450 10mm, side cutting edges HB450 30mm, cutting edge HB500 400x50mm, center pin 100mm, steel bushings inside swivel head, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1800	2.179	1952	15,949 €
2000	2.472	2072	16,375 €
2200	2.765	2192	16,798 €
2400	3.058	2312	17,210 €
Additional charge with 2. bottom or wear stripes per meter			850 €
Additional charge with OQ80 hydraulic adapter			4,110 €

TILT BACKHOE BUCKET CLASS 7S WITH CYLINDER

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 15mm, side parts HB450 10mm, side cutting edges HB450 30mm, cutting edge HB500 400x50mm, center pin 120mm, steel bushings inside swivel head, 2 cylinder with piston rod protection 2x45° incl. lock valve, suitable QC21/25



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1800	2.209	2348	17,207 €
2000	2.507	2473	17,632 €
2200	2.804	2597	18,055 €
2400	3.102	2721	18,476 €
Additional charge with 2. bottom or wear stripes per meter			850 €
Additional charge with OQ80 hydraulic adapter			4,110 €

OPERATING WEIGHT 36 TO 45 T



TILT BACKHOE BUCKET CLASS 7S WITH TILT MOTOR

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 15mm, side parts HB450 10mm, side cutting edges HB450 30mm, cutting edge HB500 400x50mm, tilt range 2x50°, suitable QC21/25

Cutting edge [mm]	Capacity [m³]	Weight with BV300 [kg]	Price with BV300 to 38 t	Weight with BV350 [kg]	Price with BV350 to 45 t
1800	2.250	2450	29,963 €	k. A.	37,111 €
2000	2.550	2570	30,379 €	k. A.	37,516 €
2200	2.845	2690	30,795 €	k. A.	37,922 €
2400	3.145	2810	31,211 €	k. A.	38,338 €
Additional charge with 2. bottom or wear stripes per meter					850 €
Additional charge with OQ80 hydraulic adapter					4,110 €
Additional charge with GPS/sensor preparation with V90 plug					1,850 €
Additional charge with GPS/sensor preparation with 3/4" plug					1,630 €
Additional charge with manual throttle valve					120 €



LOADING BUCKET CLASS 7S

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 15mm, side parts HB450 10mm, side cutting edges HB450 30mm, cutting edge HB500 400x50mm, suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Price
1800	2.209	1363	10,789 €
2000	2.507	1488	11,288 €
2200	2.804	1612	11,788 €
2400	3.102	1736	12,288 €
Additional charge with 2. bottom or wear stripes per meter			850 €

OPERATING WEIGHT 36 TO 45 T

DEMOLITION AND SORTING BUCKET CLASS 7S WITH SKELETON BARS SW-VERSION

OPERATING WEIGHT 36 TO 45 T

Skeleton bars HB450 35mm, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x50mm, welded tooth system Cat J460 or ESCO U45, suitable QC21/25 or OQ80



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U45
1500	2.106	1835	5	15,575 €	16,438 €
1600	2.278	1940	5	16,272 €	17,136 €
1800	2.623	2230	6	17,395 €	18,425 €
2000	2.967	2440	6	18,322 €	19,351 €

The bar distance may vary on the outer bars, depending on the cutting edge.

DEMOLITION AND SORTING BUCKET CLASS 7S WITH SKELETON BARS LH-VERSION

OPERATING WEIGHT 36 TO 45 T

Skeleton bars HB450 35mm, bar distance 60mm, side parts HB450 25mm, cutting edge HB500 300x50mm, welded tooth system Cat J460 or ESCO U45, suitable SW66 or CW45




Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U45
1500	2.083	1810	5	15,575 €	16,438 €
1600	2.252	1910	5	16,272 €	17,136 €
1800	2.590	2200	6	17,395 €	18,425 €
2000	2.929	2400	6	18,322 €	19,351 €

Additional charge with Likufix SW66 adapter

1,707 €

The bar distance may vary on the outer bars, depending on the cutting edge.

OPERATING WEIGHT 36 TO 45 T



DEMOLITION AND SORTING BUCKET CLASS 7S WITH CROSS BARS SW-VERSION

OPERATING WEIGHT 36 TO 45 T

Cross bars HB500, bar distance 60mm, side parts HB450 40mm, cutting edge HB500 300x50mm, welded tooth system Cat J460 or ESCO U45, suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U45
1500	2.106	1560	5	13,587 €	14,451 €
1600	2.278	1625	5	14,582 €	15,450 €
1800	2.623	1795	6	15,700 €	16,740 €
2000	2.967	1925	6	16,626 €	17,666 €



DEMOLITION AND SORTING BUCKET CLASS 7S WITH CROSS BARS LH-VERSION

OPERATING WEIGHT 36 TO 45 T

Cross bars HB500, bar distance 60mm, side parts HB450 40mm, cutting edge HB500 300x50mm, welded tooth system Cat J460 or ESCO U45, suitable SW66 or CW45

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J460	Price with ESCO U45
1500	2.083	1545	5	13,587 €	14,451 €
1600	2.252	1615	5	14,582 €	15,450 €
1800	2.590	1780	6	15,700 €	16,740 €
2000	2.929	1915	6	16,626 €	17,666 €

Additional charge with Likufix SW66 adapter

1,707 €

OPERATING WEIGHT 36 TO 45 T

VHD-BACKHOE BUCKET SW-VERSION CLASS 7S

OPERATING WEIGHT 36 TO 45 T

Bottom and side parts HB450 15mm, side cutting edges HB450 40mm, cutting edge HB500 400x60mm, side wear plates HB450, wear stripes crosswise HB500 150x20mm, welded tooth system ESCO U55, suitable QC21/25 or OQ80



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
1200	1.596	1472	5	15,168 €
1400	1.935	1608	5	16,046 €
1600	2.278	1744	5	17,479 €
1800	2.623	1918	6	18,811 €
2000	2.967	2053	6	19,659 €

VHD-BACKHOE BUCKET LH-VERSION CLASS 7S

OPERATING WEIGHT 36 TO 45 T

Bottom and side parts HB450 15mm, side cutting edges HB450 40mm, cutting edge HB500 400x60mm, side wear plates HB450, wear stripes crosswise HB500 150x20mm, welded tooth system ESCO U55, suitable SW66 or CW45



Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
1200	1.581	1420	5	15,168 €
1400	1.914	1537	5	16,046 €
1600	2.252	1655	5	17,479 €
1800	2.590	1812	6	18,811 €
2000	2.929	1930	6	19,659 €

Additional charge with Likufix SW66 adapter

1,707 €

OPERATING WEIGHT 36 TO 45 T



ROCK BACKHOE BUCKET CLASS 7S

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 15mm, side parts HB450 15mm, side cutting edges HB450 35mm, side part reinforcement HB450 30mm, cutting edge HB500 400x60mm, with wear stripes lengthwise HB450 and crosswise HB500, with 2 set noses, welded tooth system Cat J550 or ESCO U55, suitable QC21/25 or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price with Cat J550	Price with ESCO U55
1200	1.704	1968	4	14,743 €	15,443 €
1400	2.091	2187	5	15,949 €	16,764 €
1600	2.483	2373	5	16,979 €	17,821 €
1800	2.876	2591	6	18,592 €	19,553 €
2000	3.269	2777	6	19,633 €	20,611 €



RIPPING BUCKET CLASS 7S

OPERATING WEIGHT 36 TO 45 T

Bottom HB450 15mm, side parts HB450 15mm, side cutting edges HB450 50mm, side part reinforcement HB450 40mm, cutting edge HB500 400x70mm, with wear stripes crosswise HB500, welded tooth system ESCO U60, suitable QC21/25* or OQ80

Cutting edge [mm]	Capacity [m³]	Weight [kg]	Teeth	Price
810	0.450	1357	3	12,650 €

*The cutting widths may vary slightly for marked or other adapters in order to ensure the best possible technical design.

OPERATING WEIGHT 36 TO 45 T

RIPPER TOOTH

OPERATING WEIGHT 36 TO 45 T

Leg with changeable tooth tips and leg protection HB450, ripper tooth Cat Ripper 4T5502SX, suitable QC21/25 or OQ80

Height [mm]	Leg [mm]	Weight [kg]	Price
1310	100	on request	on request



GRAB RAKE

OPERATING WEIGHT 36 TO 45 T


HB450 legs with changeable ripper tooth, leg thickness 50mm, ripper tooth J350, suitable QC21/25 or OQ80

Legs	Width [mm]	Weight [kg]	Price
4	1800	900	12,579 €
5	2000	1250	14,785 €



MOUNTING PLATE

Type	Price with drilling pattern
QC21/25	2,856 €



LOAD HOOK ADAPTER

incl. swivel hook, lifting capacity swivel hook 16 t

Type	Weight [kg]	Price
QC21/25	170	2,978 €



ADDITIONAL CHARGE

ADDITIONAL CHARGE FOR SW-ADAPTERN FOR ATTACHMENTS

Combi-adapter	Operating weight [t]	Price
QC01/QC03 for Class 1	1 to 2	653 €
QC01/QC03 for Class 2/2S	2 to 3.8	618 €
QC03/QC08 for Class 3/3S	3.8 to 6.5	703 €
QC03/QC08 for Class 4/4S	6.5 to 12	535 €

HQ/OilQuick	Operating weight [t]	Price
OQ40 hydraulic	1 to 5	1,311 €
OQ40-5 hydraulic	1 to 5	1,384 €
OQ45 and OQ45-5 hydraulic	5 to 12	1,686 €
OQ60 and OQ60-5 hydraulic	8 to 15	2,030 €
OQ65 hydraulic	14 to 22	2,716 €
OQ70 hydraulic	15 to 28	3,434 €
OQ70/55 hydraulic	18 to 32	3,652 €
OQ80 hydraulic	25 to 43	4,110 €

Likufix SW33	Price
for backhoe bucket/ripper tooth	968 €
for tilting buckets	4,890 €

Likufix SW48	Price
for backhoe bucket/ripper tooth	1,093 €
for tilting buckets	5,878 €

Likufix SW66	Price
for backhoe bucket/ripper tooth	1,707 €
for tilting buckets	8,074 €

For quick coupler adapter from Lehnhoff-Standard (not reversible adapter (HT)), Schaeff, Verachttert, Easy Lock, Martin or Liebherr-Standard (not Likufix) we do not charge an additional fee, other quick couplers on request.

ADDITIONAL CHARGE

ADAPTER AND PLATES

QUICKCHANGE

Welding adapter	Price
QC01	135 €
QC03	172 €
QC08	302 €
QC01HT	135 €
QC03HT	172 €
QC08HT	302 €
Welding adapter	
QC10	989 €
QC21/25	1,197 €

Gripper adapter	Price without universal joint	Price with universal joint
QC01	426 €	682 €
QC03	502 €	834 €
QC08	781 €	1,213 €
QC10	1,853 €	2,797 €
QC21/25	2,331 €	3,357 €

Mounting plate	Price with drilling pattern
QC01	502 €
QC03	583 €
QC08	955 €
QC10	2,331 €
QC21/25	2,856 €

Load hook adapter incl. swivel hook	Lifting capacity [t] swivel hook	Price
QC01	2	617 €
QC03	3.15	678 €
QC08	5.3	1,038 €
QC10	12.5	2,295 €
QC21/25	16	2,978 €

ADAPTER AND PLATES

Combi adapter	Price
QC01/QC03	745 €
QC03/QC08	830 €

Combi-Mounting plate	Price with drilling pattern
QC01/QC03	910 €
QC03/QC08	1,070 €

HQ/OILQUICK (FOR MECHANICAL ATTACHMENTS)

Welding adapter	Price
HQ40/OQ40	260 €
OQ40-5	271 €
HQ45/OQ45/OQ45-5	375 €
OQ60/OQ60-5	677 €
OQ65	822 €
OQ70	1,009 €
OQ70/55	1,030 €
OQ80	1,374 €

ADAPTER AND PLATES

LIEBHERR

Welding adapter with bolt	Price
SW33	832 €
SW48	1,343 €
SW66	1,665 €

Welding adapter welded on base plate	Price
SW33 ca. 450x400x200mm	1,145 €
SW48 ca. 650x600x30mm	1,873 €
SW66 ca. 750x700x30mm	2,414 €

Gripper adapter	Price without universal joint	Price with universal joint
SW33	1,981 €	2,797 €
SW48	2,412 €	3,357 €
SW66	2,622 €	3,496 €

Mounting plate	Price with drilling pattern
SW33	1,912 €
SW48	2,331 €
SW66	3,124 €

Price only apply to standard drilling patterns (single drilling patterns).

Load hook adapter incl. swivel hook	Lifting capacity [t] swivel hook	Price
SW33	12.5	2,167 €
SW48	12.5	2,967 €
SW66	16	4,224 €

ADAPTER AND PLATES

WACKER NEUSON – EASY LOCK

Welding adapter	Price
Easy Lock HS02 to 2.5 t	125 €
Easy Lock HS03 to 3.8 t	172 €
Easy Lock HS06/08 to 6.5/10 t	271 €

Gripper adapter	Price without universal joint	Price with universal joint
Easy Lock HS02	490 €	723 €
Easy Lock HS03	606 €	874 €
Easy Lock HS06/08	1,084 €	1,276 €

Mounting plate	Price with drilling pattern
Easy Lock HS02	630 €
Easy Lock HS03	664 €
Easy Lock HS06/08	1,014 €

Price only apply to standard drilling patterns (single drilling patterns).

Load hook adapter incl. swivel hook	Lifting capacity [t] swivel hook	Price
Easy Lock HS02	2	659 €
Easy Lock HS03	3.15	793 €
Easy Lock HS06/08	5.3	980 €

ADAPTER AND PLATES

SYSTEM MARTIN / MENZI MUCK

Welding adapter	Price
MH02 to 2 t	115 €
MH03 to 3.5 t / SW010	125 €
MH10 to 10 t / SW020	224 €
MH18 to 14 t	433 €

Gripper adapter	Price without universal joint	Price with universal joint
MH02	426 €	682 €
MH03 / SW010	502 €	834 €
MH10 / SW020	781 €	1,213 €
MH18	1,539 €	2,541 €

Mounting plate	Price with drilling pattern
MH02	630 €
MH03 / SW010	664 €
MH10 / SW020	1,014 €
MH18	1,457 €

Price only apply to standard drilling patterns (single drilling patterns).

Load hook adapter incl. swivel hook	Lifting capacity [t] swivel hook	Price
MH02	2	588 €
MH03 / SW010	3.15	776 €
MH10 / SW020	5.3	952 €
MH18	12.5	2,191 €

ADAPTER AND PLATES

VERACHTERT

Anschweißflasche (Satz)	Price
CW05	157 €
CW10	224 €
CW20/30/40	636 €
CW45	1,301 €
CW55	2,321 €

Gripper adapter	Price without universal joint	Price with universal joint
CW05	501 €	827 €
CW10	746 €	1,143 €
CW20/30/40 S	2,367 €	3,379 €
CW20/30/40	2,459 €	3,590 €

Mounting plate	Price with drilling pattern
CW05	757 €
CW10	991 €
CW20/30/40	2,506 €
CW45	3,321 €
CW55	3,868 €

Price only apply to standard drilling patterns (single drilling patterns),

Load hook adapter incl. swivel hook	Lifting capacity [t] swivel hook	Price
CW05	2	659 €
CW10	5.3	968 €
CW20/30/40	12.5	2,326 €
CW45	16	3,757 €

TRANSFORMATIONS

QUICKCHANGE

Transformations	Price
QC01	365 €
QC01 HT	365 €
QC03	500 €
QC03 HT	500 €
QC08	729 €
QC08 HT	729 €
QC10	1,873 €
QC21/25	2,414 €

HQ/OILQUICK

Transformations	Price backhoe bucket	Price backhoe bucket, adapter in bucket deployed	Price hydr. bucket (only OilQuick)
HQ40/OQ40	538 €	601 €	1,832 €
OQ40-5	559 €	609 €	1,957 €
HQ45/OQ45	772 €	841 €	2,497 €
OQ60	1,472 €	1,717 €	3,476 €
OQ60-5	1,472 €	1,717 €	3,476 €
OQ65	1,848 €	2,227 €	4,370 €
OQ70	2,305 €	2,717 €	5,567 €
OQ70/55	2,477 €	2,937 €	5,848 €
OQ80	3,147 €	4,027 €	6,659 €

LIEBHERR

Transformations (Standard – not Likufix)	Price
SW33	1,665 €
SW48	2,383 €
SW66	3,028 €

TRANSFORMATIONS

SYSTEM MARTIN

Transformations	Price
MH02 to 2 t	343 €
MH03 to 3.5 t / MenziMuck SW010	385 €
MH10 to 10 t / MenziMuck SW020	624 €
MH18 to 14 t	1,145 €

WACKER NEUSON – EASY LOCK

Transformations	Price
Easy Lock HS02 to 2.5 t	333 €
Easy Lock HS03 to 3.8 t	416 €
Easy Lock HS06/08 to 6.5/10 t	636 €

VERACHTERT

Transformations	Price
CW05	365 €
CW10	510 €
CW20/30/40	1,436 €
CW45	2,351 €
CW55	3,892 €

Other transformations such as for wheel loader shovels, on demand request,

GENERAL TERMS AND CONDITIONS OF SALE AND DELIVERY OF HENLE BAUMASCHINENTECHNIK GMBH (CURRENT AS OF NOVEMBER 2021)

§ 1 General Information – Scope of application

(1) We, HENLE Bauamschinentchnik GmbH, provide our services exclusively under the conditions of these General Terms and Conditions of Sale and Delivery, regardless of the type of contract to which the transaction is to be attributed. Closing a contract with consumers is excluded. These General Terms and Conditions of Sale and Delivery shall also apply to future transactions with the customer, even if not expressly referred to.

(2) We reject any general terms and conditions (GTC) of the customer. Such GTC from the customer shall not become a part of a contract even if the customer has ordered or confirmed making reference to the customer's own general terms and conditions, and we do not object to this.

§ 2 Offers – Binding effect

(1) Our offers are subject to change and to intermediate sale.

(2) If the order is to be qualified as an offer under § 145 of the German Civil Code (BGB), we can accept the offer within 2 weeks. In the case of a written offer, such time limit begins with the date of issue stated in the offer. The contract comes only into existence with a written acceptance or confirmation of the order respectively. Silence towards an offer by the customer is no such acceptance.

§ 3 Delivery conditions

(1) Weight, dimensions and technical data, including the resistance to wear of our products, in any drawings, brochures, illustrations or any other documentation are approximate and non-binding and are neither assured characteristics nor guarantees, unless otherwise expressly agreed upon in writing.

(2) The object of the contract is the product sold that complies with the specific individual contract in which the characteristics, properties and intended use are stipulated. Other properties/characteristics or intended uses are relevant only if they have been expressly confirmed by us.

(3) We provide our delivery and services "ex Works", pursuant to Incoterms Revision 000, from our warehouse without packaging; packaging shall be invoiced separately. We shall ship the goods in a manner we deem appropriate, at the cost and risk of the customer. If the customer so desires, we shall take out an appropriate transport insurance policy that covers the delivery; the costs incurred in this respect are borne by the customer.

§ 4 Prices and terms of payment

(1) Value-added tax (sales tax) is not included in our prices; it is stated separately in the legal amount on the day of invoicing.

(2) Payments are due within 30 days of delivery of the goods without deduction. The statutory regulations apply in regards to the consequences of a delay in payment. We may, however, also demand payment in installments against delivery. The deduction of a discount is permitted only if this has been expressly agreed upon in writing.

(3) The customer may offset or exercise a right of retention only if and to the extent that the customer's counterclaims are undisputed or legally established.

(4) Bills of exchange and checks will be accepted as conditional payment. The customer bears the costs of the bill of exchange or check, including the discount charges.

(5) Should we perform in advance, the requirements of § 321 of the German Civil Code (BGB) shall apply if a bill of exchange or check from the customer has not been accepted, unless the customer is not responsible for this. If this occurs, all other payments are then immediately due, even if we have deferred them or exchanged them.

§ 5 Delivery time

(1) Unless expressly agreed upon otherwise, the delivery times stated by us are always non-binding.

(2) If we are in delay of delivery and the customer experiences more than minor damages, our liability amounts to 1% of the delivery value of the delayed service for each whole week of delay, to a maximum of 10%. Further claims for damages are excluded, unless the damage is caused by gross negligence of one of our legal representatives or senior or simple agent.

(3) The above provisions do not apply to a commercial fixed transaction. However, we are liable only for foreseeable damages that are typical of this type of contract.

(4) Delays in delivery due to force majeure or to unforeseen circumstances not attributable to us, such as labor disputes and their consequences, are not our fault. An agreed-upon delivery period is extended by the duration of the hindrance plus an appropriate start-up period. Claims for damages are excluded in this case.

(5) We may partially perform.

§ 6 Warranty for material defects

(1) Claims for defects from the customer presuppose that the customer has properly complied with the customer's inspection and complaint obligations due pursuant to § 377 of the German Commercial Code (HGB). In regards to wear parts, their resistance to wear does not correspond to the contractually agreed condition only if the wear incurred substantially exceeds the expected extent, taking into account the type of application of the customer. In the case of disputes, the customer must give evidence of the operating conditions to which the delivered wear part was exposed.

(2) If our performance is deficient, our warranty for material defects is initially limited to supplementary performance, which we shall perform at our own discretion by removing the defect or by delivering a defect-free product.

(3) If we are unwilling or unable to replenish the goods, or there is a delay beyond reasonable time limits, or if we fail in any other way for reasons for which we are responsible, the customer may, at the customer's own discretion, withdraw from the contract or demand a reduction.

(4) If we refuse supplementary performance, the supplementary performance fails or is not reasonable to the customer, claim to all further claims, with the exception of reduction, especially indemnity is excluded. The exception are indemnity claims by the customer which are based on injury of life, body or health as well as liability for other damages which are caused by intentional or grossly negligent breach of duty by us or, one of our legal representatives or agents. In no event are we liable for damages that did not occur to the delivered object itself, such as lost profits or other assets.

(5) If the customer is entitled to make claims against us pursuant to § 478 of the German Civil Code (BGB), any claim for damages shall be excluded.

(6) When purchasing used items, any claims due to material defects put forth by the customer are excluded.

(7) Deviating from the statutory regulation, the customer's warranty claims are subject to a limitation period of 12 months. Prescription starts from the date of the transfer of risk.

(8) We are liable to the extent of the statutory provisions, provided the customer asserts claims for damages based on intent or gross negligence, including intent and gross negligence of our representatives or vicarious agents. The liability for damages is limited, under reserve of intentional breaches of contract, to foreseeable, typical damages.

(9) Unless otherwise stated above, liability is excluded.

(10) If the complaint turns out to be unjustified, the customer must reimburse the services we have rendered on the basis of a complaint according to our list prices.

§ 7 Warranty

(1) The assumption of a warranty by us presupposes that it has been expressly agreed upon in writing as such. In doing so, we must have stated unequivocally that we wanted to assume the liability for the guaranteed circumstance under all circumstances, even if we are not at fault. No such warranty is contained in the description of the service.

(2) If, in individual cases, we have assumed a warranty, the latter is, in the absence of other individual and written agreements, limited to six months, beginning with the delivery of the purchased item.

(3) Our liability under a warranty is limited to the replacement of the foreseeable damage that is typical for such a contract.

§ 8 Liability for other reasons / exemption

(1) Further liability for compensation for damages as provided for in § 6 is excluded, without consideration of the legal nature of the claim asserted. This applies in particular to claims for damages arising from a breach of duty when concluding the contract, due to other breaches of duty or due to delictual claims for compensation for damage to property pursuant to Art. § 823 of the German Civil Code (BGB).

(2) This shall not apply if a material obligation, which arises from the nature of the contract and which would be jeopardized by the limitation of liability of the object of the contract, has been infringed upon. Our obligation to provide compensation shall, however, be limited to foreseeable damages typical for such a contract, unless we are responsible due to intent or gross negligence.

(3) The exclusion or limitation of liability also affects the persons who have acted for us, in particular for representatives of bodies, employees, workers, contractors, representatives and other vicarious agents.

§ 9 Retention of title

(1) We retain ownership of the delivered goods until complete fulfillment of all our claims to payment – also from other shops – vis-a-vis the customer.

(2) In the case of a breach of contract by the customer, especially in the event of a delay in payment, we may repossess the delivered goods. The repossession of the purchase item by us constitutes a withdrawal from the contract. We are then authorized to negotiate freely. The proceeds from the sale are to be credited to the customer's liabilities less appropriate costs of realization and a profit margin which we would have earned if sold from our own portfolio or in trade.

(3) The customer shall handle the delivered item with care as long as the retention of title exists, and sufficiently insure it up to the new value, in particular against fire, water and theft damages. If maintenance and inspection work is required, the customer must carry it out in good time and at the customer's own expense. The customer hereby assigns the insurance claims to us.

(4) In case of attachments or other forms of intervention by third parties against our property, the customer shall make reference to the reservation of title and notify us immediately in writing so that we can bring an action pursuant to § 771 of the German Code of Civil Procedure (ZPO). If the third party is not in a position to reimburse us for the court and extrajudicial costs of an action pursuant to § 771 of the German Code of Civil Procedure (ZPO), the customer shall be liable for any loss incurred by us.

(5) The customer is allowed to resell the delivered item in any regular manner typical of its business operations. The customer hereby assigns to us all claims in the amount of the final invoice amount (including VAT), regardless of whether the customer was authorized or unauthorized, which can also come from a confirmation of balances from a current account agreed with the customer's consumer; the customer, however, has a revocable right to collect such receivables. At our request, the customer shall disclose the assigned claims and their debtors and shall provide all information necessary for collection, hand over the related documents, and notify the third party of the assignment in writing.

(6) The processing, modification or combining of the purchased item by the customer will always be carried out on our behalf. If the goods delivered are processed, modified or combined with other items not belonging to us, we acquire co-ownership of the new item in the ratio of the value of the delivered item (final invoice amount including VAT) to the value of the remaining items. The same applies equally to the newly created goods and to the goods delivered under retention of title; the transfer of the receivables from the resale, however, is limited to the proportion determined in Sentence 2.

(7) We may, at our discretion, release securities at the customer's request insofar as the securities value exceeds our claims by more than 30%.

§ 10 Choice of law, place of jurisdiction, place of performance

(1) The legal relationship between the parties is exclusively governed by the law of the Federal Republic of Germany to the exclusion of the United Nations Convention on Contracts for the International Sale of Goods (UNCITRAL / CISG).

(2) Place of performance and – if the customer is a merchant – the court of jurisdiction for all claims arising out of or in connection with these General Terms and Conditions of Sale and Delivery is Rammingen, Germany. This place of jurisdiction is exclusive for all complaints issued by the customer. We may also, however, file suit against the customer in the general court of jurisdiction of the customer.

§ 11 Severability clause

Should individual terms of the contract with the customer including the general terms and condition complete or in part are or become ineffective, the validity of all the other terms will not be affected. The completely or in part affected term shall be exchanged with a new term which economic success will be closest to the term that has become ineffective.

Rammingen, November 2021



HENLE Baumaschinentechnik GmbH

Ringstrasse 9 · 89192 Rammingen

+49 (0) 7345 - 96 77 0

info@henle-baumaschinentechnik.de

www.henle-baumaschinentechnik.de



CONVINCING QUALITY. TOP SERVICE.